

Public Utility Commission of Texas

Texas Technical Reference Manual

Version 5.0

Volume 2: Residential Measures

Program Year 2018

Last Revision Date:

October 2017



Public Utility Commission of Texas

Texas Technical Reference Manual

Version 5.0

Volume 2: Residential Measures

Program Year (PY) 2018

Last Revision Date:

October 2017

Table of Contents

1	Introduction	1-1
2	Residential Measures	2-1
2.1	Residential: Lighting	2-1
2.1.1	Standard Compact Fluorescent Lamps Measure Overview	2-1
2.1.2	Specialty Compact Fluorescent Lamps Measure Overview	2-12
2.1.3	ENERGY STAR® Omni-Directional LED Lamps Measure Overview	2-28
2.1.4	ENERGY STAR® Specialty and Directional LED Lamps Measure Overview	2-38
2.2	Residential: Heating, Ventilation, and Air Conditioning	2-54
2.2.1	Air Conditioner or Heat Pump Tune-up Measure Overview	2-54
2.2.2	Duct Efficiency Improvement Measure Overview	2-61
2.2.3	Central Air Conditioners Measure Overview	2-68
2.2.4	Ground Source Heat Pumps Measure Overview	2-142
2.2.5	Central Heat Pumps Measure Overview	2-150
2.2.6	Room Air Conditioners Measure Overview	2-290
2.3	Residential: Building Envelope	2-300
2.3.1	Air Infiltration Measure Overview	2-300
2.3.2	Ceiling Insulation Measure Overview	2-309
2.3.3	Attic Encapsulation Measure Overview	2-323
2.3.4	Wall Insulation Measure Overview	2-342
2.3.5	Floor Insulation Measure Overview	2-353
2.3.6	ENERGY STAR® Windows Measure Overview	2-360
2.3.7	Solar Screens Measure Overview	2-366
2.4	Residential: Water Heating	2-372
2.4.1	Faucet Aerators Measure Overview	2-372
2.4.2	Low-Flow Showerheads Measure Overview	2-379
2.4.3	Water Heater Pipe Insulation Measure Overview	2-386
2.4.4	Water Heater Tank Insulation Measure Overview	2-392
2.4.5	Water Heater Installation—Electric Tankless and Fuel Substitution Measure Overview	2-397
2.4.6	Heat Pump Water Heater Measure Overview	2-408
2.4.7	Water Heater Replacement—Solar Water Heating Measure Overview	2-416
2.4.8	Showerhead Temperature Sensitive Restrictor Valves Measure Overview	2-421
2.4.9	Tub Spout and Showerhead Temperature Sensitive Restrictor Valves Measure Overview	2-428
2.5	Residential: Appliances	2-437
2.5.1	ENERGY STAR® Ceiling Fans Measure Overview	2-437
2.5.2	ENERGY STAR® Clothes Washers Measure Overview	2-446
2.5.3	ENERGY STAR® Dishwashers Measure Overview	2-455
2.5.4	ENERGY STAR® Refrigerators Measure Overview	2-461

2.5.5 ENERGY STAR® Pool Pumps Measure Overview	2-474
2.6 Residential: Appliance Recycling	2-481
2.6.1 Refrigerator/Freezer Recycling Measure Overview	2-481

List of Figures

Figure 2-1: Unit Replacement Percentages upon Compressor Failure	2-72
Figure 2-2: Survival Function for Central Air Conditioners	2-74
Figure 2-3: Unit Replacement Percentages upon Compressor Failure	2-155
Figure 2-4: Survival Function for Central Heat Pumps	2-157
Figure 2-5: Survival Function for Room Air Conditioners	2-295
Figure 2-6: Shower, Bath, and Sink Hot Water Use Profile	2-376
Figure 2-7: Shower, Bath, and Sink Hot Water Use Profile	2-383
Figure 2-8: Shower, Bath, and Sink Hot Water Use Profile	2-426
Figure 2-9: Shower, Bath, and Sink Hot Water Use Profile	2-435
Figure 2-10: Survival Function for ENERGY STAR® Refrigerators	2-469

List of Tables

Table 1-1: Residential Deemed Savings by Measure Category	1-1
Table 2-1: ENERGY STAR® Standard CFLs—EISA Baselines	2-2
Table 2-2: ENERGY STAR® Standard CFLs—Default Equivalent Wattages if Lumen Output Unknown	2-4
Table 2-3: ENERGY STAR® Standard CFLs—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties	2-5
Table 2-4: ENERGY STAR® Standard CFLs—Coincidence Factors	2-6
Table 2-5: ENERGY STAR® Standard CFLs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties	2-7
Table 2-6: ENERGY STAR® Standard CFLs—Estimated Useful Life	2-9
Table 2-7: Residential Compact Fluorescent Lamp Revision History	2-11
Table 2-8: ENERGY STAR® CFLs—Default Equivalent Wattages if Lumen Output Unknown	2-13
Table 2-9: DOE-Ruling Exempt Reflectors—Default Wattages	2-14
Table 2-10: EISA-Affected Specialty CFL Baselines (Non-Reflectors)	2-15
Table 2-11: EISA-Exempt Specialty CFL Baselines (Non-Reflectors)	2-16
Table 2-12: DOE IRL Ruling-Affected Specialty CFL Baselines (Reflectors)	2-17
Table 2-13: DOE-Ruling Exempt Reflectors	2-18
Table 2-14: ENERGY STAR® Specialty CFLs—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties	2-21
Table 2-15: ENERGY STAR® CFLs—Coincidence Factors	2-23

Table 2-16: ENERGY STAR® CFLs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties.....	2-23
Table 2-17: ENERGY STAR® Specialty CFLs—Estimated Useful Life	2-26
Table 2-18: Residential Specialty Compact Fluorescent Lamp Revision History	2-27
Table 2-19: ENERGY STAR® Omni-Directional LEDs—EISA Baselines	2-29
Table 2-20: ENERGY STAR® Omni-Directional LEDs—Default Equivalent Wattages if Lumen Output Unknown	2-31
Table 2-21: ENERGY STAR® Omni-Directional LEDs Interactive Effects for Cooling Energy Savings and Heating Energy Penalties	2-32
Table 2-22: ENERGY STAR® LEDs—Coincidence Factors	2-33
Table 2-23: ENERGY STAR® Omni-directional LEDs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties.....	2-34
Table 2-24: ENERGY STAR® Omni-Directional LEDs—Estimated Useful Life	2-36
Table 2-25: Residential Omni-Directional LED Lamp Revision History.....	2-37
Table 2-26: ENERGY STAR® Specialty LEDs—Default Equivalent Wattages if Lumen Output Unknown.....	2-39
Table 2-27: DOE-Ruling Exempt Reflectors—Default Wattages	2-40
Table 2-28: EISA-Affected Specialty LED Baselines (Non-Reflectors)	2-41
Table 2-29: EISA-Exempt Specialty LED Baselines (Non-Reflectors)	2-42
Table 2-30: DOE IRL Ruling-Affected Specialty LED Baselines (Reflectors)	2-43
Table 2-31: DOE-Ruling Exempt Reflectors	2-44
Table 2-32: ENERGY STAR® Specialty and Directional LEDs—Interactive Effects for Cooling Energy Savings and Heating Energy Penalties	2-47
Table 2-33: ENERGY STAR® LEDs—Coincidence Factors	2-49
Table 2-34: ENERGY STAR® Specialty and Directional LEDs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties.....	2-49
Table 2-35: ENERGY STAR® Specialty LEDs—Estimated Useful Life	2-51
Table 2-36: Residential Specialty and Directional LED Lamp Revision History	2-53
Table 2-37: Equivalent full load cooling/heating hours.....	2-57
Table 2-38: Deemed Energy Savings per Ton.....	2-58
Table 2-39: Deemed Summer Demand Savings per ton	2-59
Table 2-40: Deemed Winter Demand Savings per ton	2-59
Table 2-41: Residential Specialty and Directional LED Lamp Revision History	2-60
Table 2-42: Duct Sealing—Applicability	2-62
Table 2-43: Energy Savings V_E per CFM ₂₅ Reduction	2-64
Table 2-44: Summer Demand Savings V_S per CFM ₂₅ Reduction.....	2-65
Table 2-45: Winter Demand Savings V_W per CFM ₂₅ Reduction	2-65

Table 2-46: Duct Efficiency Improvement Revision History	2-67
Table 2-47: Central Air Conditioner Baseline Efficiencies.....	2-69
Table 2-48: Central Air Conditioner CEE Tier 1 Requirements.....	2-70
Table 2-49: Air Conditioner Capacity Curve Coefficients.....	2-71
Table 2-50: Air Conditioner EIR Curve Coefficients.....	2-71
Table 2-51: Remaining Useful Life of Replaced Unit	2-73
Table 2-52: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 1	2-75
Table 2-53: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 2	2-75
Table 2-54: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 3	2-76
Table 2-55: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 4	2-76
Table 2-56: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 5	2-76
Table 2-57: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 1..	2-77
Table 2-58: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 2..	2-79
Table 2-59: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 3..	2-81
Table 2-60: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 4..	2-83
Table 2-61: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 5..	2-85
Table 2-62: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 1	2-87
Table 2-63: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 1	2-89
Table 2-64: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 2.....	2-91
Table 2-65: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 2.....	2-93
Table 2-66: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 3.....	2-95
Table 2-67: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 3.....	2-97
Table 2-68: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 4.....	2-99
Table 2-69: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 4.....	2-101
Table 2-70: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 5.....	2-103
Table 2-71: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 5.....	2-105
Table 2-72: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 1	2-108
Table 2-73: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 2	2-108
Table 2-74: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 3	2-108
Table 2-75: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 4	2-109
Table 2-76: Summer Demand Savings for 14.0 SEER New Construction Burnout Baseline— Zone 5	2-109

Table 2-77: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 1	2-110
Table 2-78: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 2	2-112
Table 2-79: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 3	2-114
Table 2-80: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 4	2-116
Table 2-81: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 5	2-118
Table 2-82: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 1....	2-120
Table 2-83: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 1.2	2-122
Table 2-84: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 2....	2-124
Table 2-85: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 2.2	2-126
Table 2-86: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 3....	2-128
Table 2-87: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 3.2	2-130
Table 2-88: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 4....	2-132
Table 2-89: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 4.2	2-134
Table 2-90: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 5....	2-136
Table 2-91: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 5.2	2-138
Table 2-92: Residential Central Air Conditioner Revision History	2-141
Table 2-93: Ground Source Heat Pump Baseline Efficiencies	2-143
Table 2-94: Ground Source Heat Pump ENERGY STAR® Tier 3 Requirements	2-143
Table 2-95: Equivalent full load cooling/heating hours	2-146
Table 2-96: Ground Source Heat Pumps—Coincidence Factors for GSHPs	2-147
Table 2-97: Energy Savings for Desuperheaters	2-147
Table 2-98: Summer Peak Demand Savings for Desuperheaters	2-147
Table 2-99: Ground Source Heat Pump Revision History	2-149
Table 2-100: Central Heat Pump Baseline Efficiencies	2-152
Table 2-101: Central Heat Pump CEE Tier 1 Requirements	2-152
Table 2-102: Heat Pump Capacity Curve Coefficients	2-154
Table 2-103: Heat Pump EIR Curve Coefficients	2-154
Table 2-104: Remaining Useful Life of Replaced Unit	2-156

Table 2-105: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 1	2-158
Table 2-106: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 2	2-158
Table 2-107: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 3	2-159
Table 2-108: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 4	2-159
Table 2-109: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 5	2-159
Table 2-110: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 1	2-160
Table 2-111: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 2	2-162
Table 2-112: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 3	2-164
Table 2-113: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 4	2-166
Table 2-114: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 5	2-168
Table 2-115: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 1	2-170
Table 2-116: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 1	2-172
Table 2-117: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 2	2-174
Table 2-118: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 2	2-176
Table 2-119: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 3	2-178
Table 2-120: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 3	2-180
Table 2-121: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 4	2-182
Table 2-122: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 4	2-184
Table 2-123: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 5	2-186
Table 2-124: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 5	2-188
Table 2-125: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 1	2-191

Table 2-126: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 2	2-191
Table 2-127: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 3	2-191
Table 2-128: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 4	2-192
Table 2-129: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 5	2-192
Table 2-130: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 1	2-193
Table 2-131: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 2	2-195
Table 2-132: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 3	2-197
Table 2-133: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 4	2-199
Table 2-134: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 5	2-201
Table 2-135: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 1	2-203
Table 2-136: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 1	2-205
Table 2-137: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 2	2-207
Table 2-138: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 2	2-209
Table 2-139: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 3	2-211
Table 2-140: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 3	2-213
Table 2-141: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 4	2-215
Table 2-142: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 4	2-217
Table 2-143: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 5	2-219
Table 2-144: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 5	2-221
Table 2-145: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 1 ..	2-223
Table 2-146: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 2 ..	2-223
Table 2-147: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 3 ..	2-224
Table 2-148: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 4 ..	2-224
Table 2-149: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 5 ..	2-224
Table 2-150: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 1	2-225
Table 2-151: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 2	2-227
Table 2-152: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 3	2-229
Table 2-153: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 4	2-231

Table 2-154: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 5	2-233
Table 2-155: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 1 ..	2-235
Table 2-156: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 1	2-237
Table 2-157: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 2 ..	2-239
Table 2-158: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 2	2-241
Table 2-159: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 3 ..	2-243
Table 2-160: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 3	2-245
Table 2-161: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 4 ..	2-247
Table 2-162: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 4	2-249
Table 2-163: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 5 ..	2-251
Table 2-164: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 5	2-253
Table 2-165: Winter Demand Savings for 8.2 HSPF Baseline—Zone 1	2-256
Table 2-166: Winter Demand Savings for 8.2 HSPF Baseline—Zone 2	2-256
Table 2-167: Winter Demand Savings for 8.2 HSPF Baseline—Zone 3	2-256
Table 2-168: Winter Demand Savings for 8.2 HSPF Baseline—Zone 4	2-257
Table 2-169: Winter Demand Savings for 8.2 HSPF Baseline—Zone 5	2-257
Table 2-170: Winter Demand Savings for 3.41 HSPF Baseline—Zone 1	2-258
Table 2-171: Winter Demand Savings for 3.41 HSPF Baseline—Zone 2	2-260
Table 2-172: Winter Demand Savings for 3.41 HSPF Baseline—Zone 3	2-262
Table 2-173: Winter Demand Savings for 3.41 HSPF Baseline—Zone 4	2-264
Table 2-174: Winter Demand Savings for 3.41 HSPF Baseline—Zone 5	2-266
Table 2-175: Winter Demand Savings for 7.7 HSPF Baseline—Zone 1	2-268
Table 2-176: Winter Demand Savings for 6.8 HSPF Baseline—Zone 1	2-270
Table 2-177: Winter Demand Savings for 7.7 HSPF Baseline—Zone 2	2-272
Table 2-178: Winter Demand Savings for 6.8 HSPF Baseline—Zone 2	2-274
Table 2-179: Winter Demand Savings for 7.7 HSPF Baseline—Zone 3	2-276
Table 2-180: Winter Demand Savings for 6.8 HSPF Baseline—Zone 3	2-278
Table 2-181: Winter Demand Savings for 7.7 HSPF Baseline—Zone 4	2-280

Table 2-182: Winter Demand Savings for 6.8 HSPF Baseline—Zone 4	2-282
Table 2-183: Winter Demand Savings for 7.7 HSPF Baseline—Zone 5	2-284
Table 2-184: Winter Demand Savings for 6.8 HSPF Baseline—Zone 5	2-286
Table 2-185: Central Heat Pump Revision History	2-289
Table 2-186: Room Air Conditioner Baseline Efficiencies for ER, ROB, and NC	2-291
Table 2-187: Room Air Conditioner Efficient Condition Specifications.....	2-292
Table 2-188: Room Air Conditioner Annual Operating Hours for Cooling	2-293
Table 2-189: Room Air Conditioners—Coincidence Factors.....	2-294
Table 2-190: Remaining Useful Life (RUL) of Replaced Room Air Conditioner	2-294
Table 2-191: Room Air Conditioner Revision History.....	2-299
Table 2-192: N Factors	2-303
Table 2-193: Energy Savings V_E per CFM ₅₀ Reduction	2-305
Table 2-194: Peak Summer Demand Savings V_S per CFM ₅₀ Reduction.....	2-305
Table 2-195: Peak Winter Demand Savings V_W per CFM ₅₀ Reduction	2-306
Table 2-196: Air Infiltration Revision History.....	2-308
Table 2-197: Residential Ceiling Insulation—Prototypical Home Characteristics.....	2-310
Table 2-198: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.).....	2-311
Table 2-199: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)	2-311
Table 2-200: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)	2-312
Table 2-201: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.).....	2-312
Table 2-202: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)	2-312
Table 2-203: Energy Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ ΔR)2- 313	
Table 2-204: Energy Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ ΔR)2- 314	
Table 2-205: Climate Zone 1: Panhandle Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)	2-314
Table 2-206: Climate Zone 2: North Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)	2-315
Table 2-207: Climate Zone 3: South Region—Residential Ceiling Insulation to R-30 Conditioning Deemed Summer Demand Savings (kW/sq. ft.)	2-315
Table 2-208: Climate Zone 4: Valley Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)	2-315

Table 2-209: Climate Zone 5: West Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW).....	2-316
Table 2-210: Summer Peak Demand Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ΔR).....	2-316
Table 2-211: Summer Peak Demand Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ΔR).....	2-316
Table 2-212: Climate Zone 1: Panhandle Region— Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.).....	2-317
Table 2-213: Climate Zone 2: North Region— Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.).....	2-317
Table 2-214: Climate Zone 3: South Region - Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.).....	2-317
Table 2-215: Climate Zone 4: Valley Region— Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.).....	2-318
Table 2-216: Climate Zone 5: West Region— Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.).....	2-318
Table 2-217: Winter Peak Demand Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ΔR).....	2-319
Table 2-218: Winter Peak Demand Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ ΔR).....	2-319
Table 2-219: Ceiling Insulation Revision History.....	2-322
Table 2-220: Residential Attic Encapsulation—Prototypical Home Characteristics.....	2-324
Table 2-221: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.).....	2-326
Table 2-222: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.).....	2-326
Table 2-223: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.).....	2-327
Table 2-224: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.).....	2-327
Table 2-225: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.).....	2-328
Table 2-226: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.).....	2-329
Table 2-227: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.).....	2-329
Table 2-228: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.).....	2-330
Table 2-229: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.).....	2-330

Table 2-230: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)	2-331
Table 2-231: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)	2-332
Table 2-232: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)	2-332
Table 2-233: Climate Zone 3: South Region—Residential Attic Encapsulation Conditioning Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)	2-332
Table 2-234: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)	2-333
Table 2-235: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW)	2-333
Table 2-231: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)	2-334
Table 2-232: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)	2-334
Table 2-233: Climate Zone 3: South Region—Residential Attic Encapsulation Conditioning Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)	2-334
Table 2-234: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)	2-335
Table 2-235: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW)	2-335
Table 2-236: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)	2-336
Table 2-237: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)	2-336
Table 2-238: Climate Zone 3: South Region -Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)	2-336
Table 2-239: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)	2-337
Table 2-240: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)	2-337
Table 2-236: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)	2-338
Table 2-237: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)	2-338
Table 2-238: Climate Zone 3: South Region -Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)	2-338
Table 2-239: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)	2-339
Table 2-240: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)	2-339

Table 2-241: Attic Encapsulation Revision History	2-341
Table 2-242: High-Efficiency Condition R-Values for 2x4 and 2x6 Walls.....	2-343
Table 2-243: Residential Wall Insulation—Prototypical Home Characteristics, Climate Zones 1-4	2-344
Table 2-244: Deemed Annual Energy Savings, Insulation of 2x4 Walls to R- 13 (kWh/sq. ft.) ...	2-344
Table 2-245: Deemed Annual Energy Savings, Insulation of 2x4 Walls to R-21 (kWh/sq. ft.)	2-345
Table 2-246: Deemed Annual Energy Savings, Insulation of 2x6 Walls to R-17 (kWh/sq. ft.)	2-345
Table 2-247: Deemed Annual Energy Savings, Insulation of 2x6 Walls to R-33 (kWh/sq. ft.)	2-346
Table 2-248: Deemed Summer Demand Savings, Insulation of 2x4 Walls to R-13 (kW/sq. ft.) .	2-347
Table 2-249: Deemed Summer Demand Savings, Insulation of 2x4 Walls to R-21 (kW/sq. ft.) .	2-347
Table 2-250: Deemed Summer Demand Savings, Insulation of 2x6 Walls to R-17 (kW/sq. ft.) .	2-348
Table 2-251: Deemed Summer Demand Savings, Insulation of 2x6 Walls to R-33 (kW/sq. ft.) .	2-348
Table 2-252: Deemed Winter Demand Savings, Insulation of 2x4 Walls to R-13 (kW/sq. ft.)	2-349
Table 2-253: Deemed Winter Demand Savings, Insulation of 2x4 Walls to R-17 (kW/sq. ft.)	2-349
Table 2-254: Deemed Winter Demand Savings, Insulation of 2x6 Walls to R-17 (kW/sq. ft.)	2-350
Table 2-255: Deemed Winter Demand Savings, Insulation of 2x6 Walls to R-33 (kW/sq. ft.)	2-350
Table 2-256: Wall Insulation Revision History	2-352
Table 2-257: Residential Floor Insulation—Modifications to the Prototype Home Characteristics	2-354
Table 2-258: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.).....	2-355
Table 2-259: Climate Zone 2: North Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.).....	2-355
Table 2-260: Climate Zone 3: South Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.).....	2-355
Table 2-261: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.).....	2-355
Table 2-262: Climate Zone 5: West Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.).....	2-356
Table 2-263: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)	2-356

Table 2-264: Climate Zone 2: North Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.).....	2-356
Table 2-265: Climate Zone 3: South Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.).....	2-356
Table 2-266: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.).....	2-356
Table 2-267: Climate Zone 5: West Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.).....	2-357
Table 2-268: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.).....	2-357
Table 2-269: Climate Zone 2: North Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.).....	2-357
Table 2-270: Climate Zone 3: South Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.).....	2-357
Table 2-271: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.).....	2-357
Table 2-272: Climate Zone 5: West Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.).....	2-358
Table 2-273: Floor Insulation Revision History	2-359
Table 2-274: Baseline Windows	2-361
Table 2-275: ENERGY STAR® Windows Specifications effective January 2015.....	2-361
Table 2-276: TRM Climate Zones and ENERGY STAR® Windows Climate Zones.....	2-361
Table 2-277: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Annual Energy Savings (kWh/sq. ft.).....	2-362
Table 2-278: ENERGY STAR® Windows Replacing Double-Pane Windows Deemed Annual Energy Savings (kWh/sq. ft.).....	2-362
Table 2-279: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Summer Demand Savings (kW/sq. ft.).....	2-363
Table 2-280: ENERGY STAR® Windows Replacing Double-Pane Windows, Deemed Summer Demand Savings (kW/sq. ft.).....	2-363
Table 2-281: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Winter Demand Savings by Heat Type (kW/sq. ft.).....	2-363
Table 2-282: ENERGY STAR® Windows Replacing Double-Pane Windows, Deemed Winter Demand Savings by Heat Type (kW/sq. ft.).....	2-364
Table 2-283: ENERGY STAR® Windows Revision History	2-365
Table 2-284: Deemed Energy (kWh) Savings per Square Foot of Solar Screen.....	2-368
Table 2-285: Deemed Summer Peak Demand (kW) Savings per Square Foot of Solar Screen	2-369
Table 2-286: Deemed Winter Peak Demand (kW) Savings per Square Foot of Solar Screen ...	2-369

Table 2-287: Solar Screens Revision History	2-371
Table 2-288: Faucet Aerators—Applicability	2-372
Table 2-289: Faucet Aerators—Baseline and Efficiency Standard	2-373
Table 2-290: Water Mains Temperature.....	2-375
Table 2-291: Water Fixture Peak Demand Ratios	2-375
Table 2-292: Faucet Aerators Revision History	2-378
Table 2-293: Low-Flow Showerheads—Applicability.....	2-379
Table 2-294: Low-Flow Showerhead—Baseline and Efficiency Standards.....	2-380
Table 2-295: Water Mains Temperature.....	2-382
Table 2-296: Water Fixture Peak Demand Ratios	2-382
Table 2-297: Low-Flow Showerheads Revision History.....	2-385
Table 2-298: Water Heater Pipe Insulation—Applicability	2-386
Table 2-299: Water Heater Pipe Insulation—Baseline Standard	2-387
Table 2-300: Water Heater Pipe Insulation—Efficiency Standard.....	2-387
Table 2-301: Estimated Pipe Surface Area	2-388
Table 2-302: Ambient Temperatures per Climate Zone.....	2-389
Table 2-303: Water Heater Pipe Insulation Revision History	2-391
Table 2-304: Water Heater Tank Insulation—Applicability.....	2-392
Table 2-305: Estimated Tank Area.....	2-393
Table 2-306: Ambient Temperatures per Climate Zone.....	2-394
Table 2-307: Water Heater Tank Insulation Revision History	2-396
Table 2-308: Water Heater Replacement—Applicability.....	2-398
Table 2-309: Water Heater Replacement—Baseline.....	2-398
Table 2-310: Water Heater Replacement—Efficiency Standards	2-399
Table 2-311: Storage Water Heater Energy Factors for Common Tank Volumes (not exhaustive)	2-399
Table 2-312: Water Heater Consumption (gal/year)*.....	2-400
Table 2-313: Water Mains Temperature*	2-400
Table 2-314: HPWH Baseline Energy Consumption (kWh) for Gas DHW with > 55 Gallon Tanks	2-403
Table 2-315: HPWH Baseline Summer Demand (kW) for Gas DHW with > 55 Gallon Tanks ...	2-404
Table 2-316: HPWH Baseline Winter Demand (kW) for Gas DHW with > 55 Gallon Tanks..	2-405
Table 2-317: Water Heater Installation—Electric Tankless and Fuel Substitution Revision History	2-407
Table 2-318: Heat Pump Water Heaters—Applicability	2-409

Table 2-319: Federal Standard for Residential Water Heaters	2-409
Table 2-320: Heat Pump Water Heaters— Minimum Required Energy Factors for Post-2004 Water Heaters.....	2-409
Table 2-321: Residential HPWH Deemed Annual Energy Savings (kWh)	2-411
Table 2-322: Residential HPWH Deemed Summer Demand Savings (kW).....	2-412
Table 2-323: Residential HPWH Deemed Winter Demand Savings (kW).....	2-413
Table 2-324: Heat Pump Water Heater Revision History.....	2-415
Table 2-325: Solar Water Heating Energy Savings (kWh).....	2-418
Table 2-326: Solar Water Heating Demand Savings (kW).....	2-419
Table 2-327: Water Heater Replacement—Solar Water Heating Revision History	2-420
Table 2-328: Showerheads with Temperature Sensitive Restrictor Valve—Applicability	2-421
Table 2-329: Estimated Showerhead with TSRV Hot Water Usage Reduction.....	2-423
Table 2-330: Water Mains Temperature.....	2-425
Table 2-331: Water Fixture Peak Demand Ratios	2-425
Table 2-332: Showerhead Temperature Sensitive Restrictor Valve Revision History	2-427
Table 2-333: Tub Spout and Showerhead System with Temperature Sensitive Restrictor Valve—Applicability	2-429
Table 2-334: Estimated Tub Spout/Showerhead System with TSRV Hot Water Usage Reduction	2-432
Table 2-335: Water Mains Temperature.....	2-434
Table 2-336: Water Fixture Peak Demand Ratios	2-434
Table 2-337: Tub Spout and Showerhead Temperature Sensitive Restrictor Valve Revision History	2-436
Table 2-338: ENERGY STAR® Specifications for Ceiling Fans.....	2-438
Table 2-339: ENERGY STAR® Ceiling Fans—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties	2-440
Table 2-340: Ceiling Fan Motor Wattages	2-441
Table 2-341: Ceiling Fan Operating Percentages.....	2-441
Table 2-342 ENERGY STAR® Ceiling Fans—Lighting Coincidence Factors	2-442
Table 2-343: ENERGY STAR® Ceiling Fans—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties	2-442
Table 2-344: ENERGY STAR® Ceiling Fan Revision History	2-445
Table 2-345: Federal Standard for Clothes Washers.....	2-447
Table 2-346: ENERGY STAR® Specifications for Residential Clothes Washers.....	2-447
Table 2-347: ENERGY STAR® Clothes Washer Characteristics	2-450
Table 2-348: ENERGY STAR® Clothes Washer Coincidence Factors.....	2-451
Table 2-349: ENERGY STAR® Clothes Washer Energy Savings (kWh)	2-451

Table 2-350: ENERGY STAR® Clothes Washer Summer Peak Demand Savings (kW)	2-452
Table 2-351: All Climate Zones—ENERGY STAR® Clothes Washer Winter Demand Savings (kW)	2-452
Table 2-352: ENERGY STAR® Clothes Washer Revision History	2-454
Table 2-353 Federal Standard for Dishwashers	2-456
Table 2-354 ENERGY STAR® Specifications for Dishwashers	2-456
Table 2-355: ENERGY STAR® Dishwasher Coincidence Factors	2-458
Table 2-356: ENERGY STAR® Dishwasher Energy Savings	2-458
Table 2-357: ENERGY STAR® Dishwasher Summer Peak Demand Savings (kW)	2-459
Table 2-358: ENERGY STAR® Dishwasher Winter Peak Demand Savings (kW)	2-459
Table 2-359: ENERGY STAR® Dishwasher Revision History	2-460
Table 2-360: ENERGY STAR® Specifications for Refrigerators.....	2-463
Table 2-361: Formulas to Calculate the ENERGY STAR® Criteria for each Refrigerator Product Category by Adjusted Volume	2-464
Table 2-362: ENERGY STAR® Refrigerator Load Shape Adjustment Factors	2-467
Table 2-363: Remaining Useful Life (RUL) of Replaced Refrigerator	2-468
Table 2-364: ENERGY STAR® Refrigerator Revision History	2-473
Table 2-365: Conventional Pool Pumps Assumptions	2-476
Table 2-366: ENERGY STAR® Pool Pumps Assumptions	2-477
Table 2-367: Demand Factors.....	2-478
Table 2-368: ENERGY STAR® Variable Speed Pool Pump Energy Savings.....	2-478
Table 2-369: ENERGY STAR® Variable Speed Pool Pump Summer Demand Savings	2-478
Table 2-370: ENERGY STAR® Variable Speed Pool Pump Winter Demand Savings	2-479
Table 2-371: ENERGY STAR® Variable Speed Pool Pump Claimed Demand Savings.....	2-479
Table 2-372: Residential ENERGY STAR® Pool Pumps Revision History	2-480
Table 2-373: Load Shape Adjustment Factors	2-483
Table 2-374: Residential Refrigerator/Freezer Recycling Revision History	2-484

Acknowledgments

The Technical Reference Manual is maintained by the Public Utility Commission of Texas' independent Evaluation, Monitoring and Verification (EM&V) team led by Tetra Tech. This version of the Texas Technical Reference Manual was primarily developed from program documentation and measure savings calculators used by the Texas Electric Utilities and their Energy Efficiency Services Providers (EESPs) to support their energy efficiency efforts, and original source material from petitions filed with the Public Utility Commission of Texas by the utilities, their consultants and EESPs such as Frontier Associates (TXu 1-904-705), ICF, CLEAResult and Nexant. Portions of the Technical Reference Manual are copyrighted 2001-2017 by the Electric Utility Marketing Managers of Texas (EUMMOT), while other portions are copyrighted 2001-2017 by Frontier Associates. Certain technical content and updates were added by the EM&V team to provide further explanation and direction as well as consistent structure and level of information.

TRM Technical Support

Technical support and questions can be emailed to the EM&V project manager, Lark.Lee@tetrattech.com and the PUCT, Katie.Rich@puc.texas.gov.

1 INTRODUCTION

This volume of the TRM contains the deemed savings for residential measures that have been approved for use in Texas by the Public Utility Commission of Texas (PUCT). This volume includes instructions regarding various savings calculators and reference sources of the information. TRM v4.0 serves as a centralized source of deemed savings values. Where appropriate, Measurement and Verification (M&V) methods by measure category are noted for informational purposes only regarding the basis of projected and claimed savings.

Table 1-1 provides an overview of the residential measures contained within this Program Year (PY) 2018 TRM 5.0 Volume 2 and the types of deemed savings estimates available for each one. There are five types of deemed savings estimates identified:

- *Point estimates* that provided a single deemed savings value correspond to a single measure or type of technology
- *Deemed saving tables* that provide energy and peak savings as a function of size, capacity, building type, efficiency level, or other inputs
- *Savings algorithms* that require specified primary inputs that must be gathered on site and the identification of default inputs where primary data could not be collected. In many cases, these algorithms are provided as references to deemed savings tables, point estimates, or calculator explanations.
- *Calculators* are used by different utilities and implementers to calculate energy savings for different measures. In many cases, there are several different calculators available for a single measure. Sometimes their background calculators are similar, and in other cases, estimates can vary greatly between each calculator.
- *M&V methods* are also used for some measures to calculate savings in the event that standard equipment is not used, or the specified building types do not apply. For some of these measures, both a simplified M&V approach and a full M&V approach may be allowed by the utility. M&V methods as a source of claimed and projected savings are noted for informational purposes only.

Table 1-1: Residential Deemed Savings by Measure Category

Measure Category	Measure Description	Point Estimates	Deemed Savings Tables	Savings Algorithm	Calculator	M&V	5.0 Update
Lighting	Standard Compact Fluorescent Lamps	–	–	X	–	–	Updated useful life estimates.
	Specialty Compact Fluorescent Lamps	–	–	X	–	–	Updated useful life estimates.

Measure Category	Measure Description	Point Estimates	Deemed Savings Tables	Savings Algorithm	Calculator	M&V	5.0 Update
	ENERGY STAR® Omni-Directional LED Lamps	–	–	X	–	–	Updated useful life estimates. Included language to deem EUL.
	ENERGY STAR® Specialty and Directional LED Lamps	–	–	X	–	–	Updated useful life estimates.
HVAC	Air Conditioner or Heat Pump Tune-up	–	–	X	–	–	No revision.
	Duct Efficiency Improvement	–	–	X	–	X	Removed PY2017 option to use energy and demand adjustment factors in combination with algorithm methodology from TRM v3.1. Option added for alternative approach to bypass the need to complete leakage testing in forthcoming guidance memo
	Central Air Conditioner	–	X	–	–	–	Updated energy savings to use TMY3 temperature bin hours. Updated demand savings for compliance with current peak definition. Added 12.44 SEER baseline savings tables previously referencing earlier version of TRM. Added savings for system downsizing.
	Ground Source Heat Pump	–	X	X	–	–	Updated peak coincidence factors for compliance with current Texas peak definition. Single coincidence factor replaced with individual factors for each climate zone.

Measure Category	Measure Description	Point Estimates	Deemed Savings Tables	Savings Algorithm	Calculator	M&V	5.0 Update
	Central Heat Pump	–	X	–	–	–	Switched to air conditioner capacity and EIR curve coefficients for estimated heat pump cooling savings. Updated energy savings to use TMY3 temperature bin hours. Updated demand savings for compliance with current peak definition. Added 12.44 SEER and 6.8 HSPF baseline savings tables previously referencing earlier version of TRM. Updated baseline to include replacing air conditioners with gas heat. Added savings for system downsizing
	Room Air Conditioner	–	–	X	–	–	Updated peak coincidence factors for compliance with current Texas peak definition. Single coincidence factor replaced with individual factors for each climate zone.
Building Envelope	Air Infiltration	–	X	–	–	X	Option added for alternative approach to bypass the need to complete leakage testing in forthcoming guidance memo
	Ceiling Insulation	–	X	–	–	–	No revision.
	Attic Encapsulation	–	X	–	–	–	Incorporated alternative savings path that includes savings for infiltration reduction
	Wall Insulation	–	X	–	–	–	Made explicit allowance for cellulose insulation.
	Floor Insulation	–	X	–	–	–	Added explicit reference to mini-split technology
	ENERGY STAR® Windows	–	X	–	–	–	Added explicit reference to mini-split technology

Measure Category	Measure Description	Point Estimates	Deemed Savings Tables	Savings Algorithm	Calculator	M&V	5.0 Update
	Solar Screens	–	X	–	–	–	Added explicit reference to mini-split technology. Added provision for Low Income and Hard-to-Reach customers cooled by room air conditioners to claim savings.
Domestic Water Heating	Faucet Aerators	–	–	X	–	–	No revision.
	Low-Flow Showerheads	–	–	X	–	–	No revision.
	Water Heater Pipe Insulation	–	–	X	–	–	No revision.
	Water Heater Tank Insulation	–	–	X	–	–	No revision.
	Water Heater Installation—Electric Tankless and Fuel Substitution	–	–	X	–	–	No revision.
	Heat Pump Water Heater	–	X	–	–	–	No revision.
	Water Heater Replacement—Solar Water Heating	–	X	–	–	–	No revision.
	Showerhead Temperature Sensitive Restrictor Valve	--	--	X	--	--	TRM v5.0 origin.
	Tub Spout and Showerhead Temperature Sensitive Restrictor Valve	--	--	X	--	--	TRM v5.0 origin.

Measure Category	Measure Description	Point Estimates	Deemed Savings Tables	Savings Algorithm	Calculator	M&V	5.0 Update
Appliances	ENERGY STAR® Ceiling Fans	–	–	X	–	–	No revision.
	ENERGY STAR® Clothes Washer	–	X	–	–	–	Updated baseline IMEF to reflect changes in Federal Standard. Updated Front Load Washer IMEF to reflect changes in ENERGY STAR Specification. Added baseline for compact units to reflect Federal Standard for compact washers.
	ENERGY STAR® Dishwasher	–	X	–	–	–	No revision.
	ENERGY STAR® Refrigerator	–	–	X	–	X	No revision.
	ENERGY STAR® Pool Pumps	--	--	X	--	--	TRM v5.0 origin.
Appliance Recycling	Refrigerator/ Freezer Recycling	X	–	X	–	–	No revision.

2 RESIDENTIAL MEASURES

2.1 RESIDENTIAL: LIGHTING

2.1.1 Standard Compact Fluorescent Lamps Measure Overview

TRM Measure ID: R-LT-CF

Market Sector: Residential

Measure Category: Lighting

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive and Direct Install

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure provides a method for calculating savings for replacement of an incandescent lamp with a standard CFL in residential applications.

A standard lamp is also called a general service lamp. General service lamps are omnidirectional bulbs that are A, BT, P, PS, S, or T shape bulbs (as defined by the ANSI Standard Lamp Shapes). These lamps are not globe, bullet, candle, flood, reflector, or decorative-shaped (B, BA, C, CA, DC, F, G, R, BR, ER, MR, MRX, or PAR shapes). These bulbs do encompass both twist/spiral and A-lamp shaped CFLs.

Please see www.lightingfacts.com/Library/Content/EISA for more information on general service lamps and CFLs.

Eligibility Criteria

Customer eligibility to be awarded these deemed savings is at the discretion of the utility for different program and customer types. See program-specific manuals to determine customer eligibility.

These savings values rely on usage patterns specific to indoor applications, and therefore should not be applied to outdoor lighting. However, this should not be construed to restrict upstream lighting programs, through which customers purchase efficient lighting products in-

store. Future versions of this document may provide savings specific to outdoor and/or upstream applications.

Baseline Condition

The baseline is assumed to be the Energy Independence and Security Act of 2007 (EISA)-mandated maximum wattage for a general service or standard incandescent or halogen lamp (see Table 2-1). Baseline wattages should be adjusted as EISA regulations dictate higher efficiency standards. The second tier of EISA 2007 (EISA Tier 2) regulation goes into effect beginning January 2020. At that time, general service lamps must comply with a 45 lumen-per-watt efficacy standard. However, due to expected lamp replacement schedules, as well as retailer sell-through of existing lighting stock, the 1st Tier EISA baseline will be retained until 2021 when the 2nd Tier EISA baseline will be applied.¹ Nevertheless, incentivized lamps installed in 2020 will be awarded savings against the 2nd Tier EISA baseline since this will be the standard in effect at the time of installation.

Table 2-1: ENERGY STAR® Standard CFLs—EISA Baselines²

Minimum Lumens	Maximum Lumens	Incandescent Equivalent Wattage Pre-EISA 2007	1 st Tier EISA 2007 (W_{Base})	2 nd Tier EISA 2007 (W_{Base}) ³	Effective Dates For 2 nd Tier EISA 2007 Standards*
310	749	40	29	12	1/1/2020
750	1,049	60	43	20	1/1/2020
1,050	1,489	75	53	28	1/1/2020
1,490	2,600	100	72	45	1/1/2020

*While 2nd Tier EISA standards are effective beginning in 2020, 1st Tier EISA baselines will be used until 2021.

¹ This is consistent with the one-year lag applied in the Arkansas TRM Version 4.0 to new standards effective before July 1 of a given year. Arkansas Technical Reference Manual, Version 4.0. Prepared for the Arkansas Public Service Commission. Approved in Docket 10-100-R. Section II – Protocol E. Page 48. <http://www.apscservices.info/EEInfo/TRM4.pdf>.

² In new ENERGY STAR® lighting standards effective September 2014, lumen bins associated with incandescent wattages have been assigned that do not align with those set out in EISA 2007. Due to the likelihood of continuing sell-through of existing ENERGY STAR® lighting and the on-going use of the EISA bin definitions, this TRM maintains the EISA lumen bins for assigning baseline wattage. Future iterations of the Texas TRM, however, may incorporate these new ENERGY STAR® lumen bins for baseline wattage estimates.

³ Wattages developed using the 45 lumens-per-watt standard for the midpoint of the provided lumen range.

High-Efficiency Condition

New CFLs must be standard (general service) ENERGY STAR® -qualified CFLs as outlined in the latest ENERGY STAR® specification.⁴ These CFLs are designed to replace incandescent lamps of the following ANSI Standard Lamp Shape: A, BT, P, PS, S and T.⁵ These lamps have medium screw or pin bases, are designed for light output between 310 and 2600 lumens, and are capable of operating at a voltage range at least partially within 110 and 130 volts.⁶

See the ENERGY STAR® website for more information on the specification in effect:
<http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Wattage reduction is defined as the difference between the wattage of a standard baseline lamp according to EISA 2007 (see Table 2-1) and the wattage of a comparable CFL. A CFL is considered comparable to the baseline lamp if they are aligned on the lumen output ranges set out in EISA 2007.

Energy Savings

Annual energy (kWh) and summer peak demand (kW) savings must be calculated separately for two time periods:

1. **First Tier EISA Baseline = 2021—installation year = 5 years**
2. **The remaining time in the EUL period**

For the first tier EISA baseline period:

$$\Delta kWh = \frac{(W_{base,FT} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 1

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kWh = \frac{(W_{base,ST} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 2

⁴ <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

⁵ https://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201_Specification.pdf.

⁶ <http://lightingfacts.com/Library/Content/EISA>.

Annual energy (kWh) savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.⁷

Where:

$W_{base,FT}$ = First-tier EISA baseline wattage corresponding with the lumen output of the purchased CFL lamp for the year purchased/installed. First tier EISA baseline lamp wattage provided in Table 2-1 under the column “Incandescent Equivalent 1st Tier EISA 2007” (if unknown, see Table 2-2 for 1st Tier EISA 2007 default wattages).

Table 2-2: ENERGY STAR® Standard CFLs—Default Equivalent Wattages if Lumen Output Unknown

Wattage Range of Installed CFL ⁸	7–10 W	9–14 W	18–20 W	15–26 W
If Unknown: Default Installed CFL Wattage ⁹	9 W	13 W	19 W	24 W
1 st Tier EISA 2007 Default Baseline	29 W	43 W	53 W	72 W
2 nd Tier EISA 2007 Default Baseline	12 W	20 W	28 W	45 W

$W_{base,ST}$ = Second-tier EISA baseline wattage corresponding with the lumen output of the purchased CFL lamp for the year purchased/installed. Second tier EISA baseline lamp wattage provided in Table 2-1 under the column “Incandescent Equivalent 2nd Tier EISA 2007” (if unknown, see Table 2-2 for 2nd Tier EISA 2007 default wattages)

W_{post} = Actual wattage of CFL purchased/installed

HOU = Average hours of use per year = 803 hours (calculated based on an average daily usage of 2.2 hours per day¹⁰)

IEF_E = Interactive Effects Factor to account for cooling energy savings and heating energy penalties associated with lighting power reductions (see Table 2-3)

⁷ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

⁸ Wattage ranges from ENERGY STAR® light bulb savings calculator. Updated October 2016. Accessed December 22, 2016. <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

⁹ ENERGY STAR® Certified Light Bulbs. <https://www.energystar.gov/productfinder/download/certified-light-bulbs/>. Accessed December 22, 2016. Mean wattages of omnidirectional, general purpose replacement CFL lamps by incandescent wattage equivalent.

¹⁰ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas ‘Make Your Mark’ Statewide CFL Program Report. Frontier Associates. June 2009.

ISR = In-Service Rate, the percentage of incentivized units that are installed and in use (rather than removed, stored, or burnt out) to account for units incentivized but not operating = 0.97¹¹

Table 2-3: ENERGY STAR® Standard CFLs—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties¹²

IEF _E					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.06	1.13	1.17	1.15	1.12
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.91	1.00	1.05	1.11	0.97
Electric Resistance Heat with AC	0.65	0.80	0.90	1.00	0.75
Electric Resistance Heat with no AC	0.57	0.69	0.76	0.83	0.65
No heat with AC	1.06	1.13	1.17	1.15	1.12
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ¹³	0.87	1.03	1.08	1.12	1.01
Upstream Lighting ¹⁴	0.89	1.03	1.07	1.10	1.01

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Demand Savings

Summer and winter demand savings are determined by applying a coincidence factor associated with each season. Annual summer or winter peak demand (kW) savings must be calculated separately for two time periods:

1. First Tier EISA Baseline = 2021-installation year = 5 years
2. The remaining time in the EUL period

¹¹ Dimetrosky, S., Parkinson, K. and Lieb, N., "Residential Lighting Evaluation Protocol – The Uniform Methods Project: Methods for Determining Energy Efficiency Savings for Specific Measures." January 2015. ISR for upstream programs, including storage lamps installed within four years of purchase. <http://energy.gov/sites/prod/files/2015/02/f19/UMPCchapter21-residential-lighting-evaluation-protocol.pdf>.

¹² Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

¹³ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

¹⁴ Ibid.

For the first tier EISA baseline period:

$$\Delta kW_{summer} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 3

$$\Delta kW_{winter} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 4

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kW_{summer} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 5

$$\Delta kW_{winter} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 6

Annual summer or winter peak demand savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.¹⁵

Where:

CF = Coincidence Factor (see Table 2-4)

IEF_D = Interactive Effects Factor to account for cooling demand savings or heating demand penalties associated with lighting power reductions (see Table 2-5)

Table 2-4: ENERGY STAR® Standard CFLs—Coincidence Factors¹⁶

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.060	0.053	0.063	0.059	0.032
Winter	0.277	0.232	0.199	0.267	0.357

¹⁵ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

¹⁶ See Volume 1, Appendix B.

Table 2-5: ENERGY STAR® Standard CFLs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties¹⁷

IEF _{D,summer}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.45	1.33	1.68	1.23	1.44
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	1.27	1.28	1.19	1.23	1.37
Electric Resistance Heat with AC	1.07	1.27	1.07	1.23	1.36
Electric Resistance Heat with no AC	1.00	1.00	1.00	1.00	1.00
No heat with AC	1.45	1.33	1.68	1.23	1.44
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ¹⁸	1.24	1.43	1.46	1.51	1.37
Upstream Lighting ¹⁹	1.20	1.36	1.39	1.43	1.31
IEF _{D,winter}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	0.98	0.98	0.98	0.98	0.98
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.71	0.67	0.65	0.74	0.81
Electric Resistance Heat with AC	0.44	0.36	0.38	0.42	0.52
Electric Resistance Heat with no AC	0.44	0.36	0.38	0.42	0.52
No heat with AC	0.98	0.98	0.98	0.98	0.98
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ²⁰	0.75	0.80	0.83	0.85	0.81
Upstream Lighting ²¹	0.78	0.83	0.85	0.86	0.83

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

¹⁷ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

¹⁸ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

¹⁹ Ibid.

²⁰ Ibid.

²¹ Ibid.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The average measure life is based upon rated lamp life of the CFL. The measure life assumes an average use of 2.2 hours per day based on blended usage for indoor/outdoor applications, and applies a 0.85 degradation factor to indoor/outdoor CFLs. The algorithms below are designed to provide EISA Tier 1 and EISA Tier 2 measure lives, each to be applied to the appropriate tier of EISA savings.

$$EUL_{Total} = \frac{Rated\ Life \times DF}{HOU \times 365.25}$$

Equation 7

$$EUL_{Tier1} = 2021 - Purchase\ Year$$

Equation 8

$$EUL_{Tier2} = EUL_{Total} - EUL_{Tier1}$$

Equation 9

Where:

- Rated Life* = 10,000 hours, 12,000 hours, 15,000 hours, or 20,000 hours, as specified by the manufacturer. If unknown, assume a 10,000-hour lifetime.²²
- DF* = 0.85 degradation factor²³
- HOU* = 2.2 hours per day²⁴
- 2021* = One-year lag applied to year that EISA Tier 1 energy efficiency standard ends

Table 2-6: ENERGY STAR® Standard CFLs—Estimated Useful Life

Range of Rated Measure Life (Hours)	Assumed Rated Measure Life (Hours)	Total Measure Life (Years)	EISA 1 st Tier Standard Baseline Measure Life (Years)	EISA 2 nd Tier Measure Life (Years)
10,000–11,000	10,000	11	3	8
11,001–13,500	12,000	13	3	10
13,501–17,500	15,000	16	3	13
≥ 17,501	20,000	20*	3	17

* Measure life capped at 20 years.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of CFLs installed
- Wattage of each installed CFL
- Lumen output of each installed CFL
- Manufacturer-rated lifetime of each installed CFL in hours
- Heating system type (gas, electric resistance, heat pump) for each home in which a CFL is installed
- Location of installed lamp (conditioned, unconditioned, or outdoor)

²² Minimum lifetime requirement under ENERGY STAR® Lamps Specification V1.1, effective September 30, 2014. <http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201%201%20Specification.pdf>.

²³ ENERGY STAR® CFL Third Party Testing and Verification Off-the-Shelf CFL Performance: Batch 3. Figure 27, p. 47.

²⁴ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas 'Make Your Mark' Statewide CFL Program Report. Frontier Associates. June 2009.

- Program type (direct install, retail).

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.
- Docket No. 39899. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Southwestern Electric Power Company, Texas-New Mexico Power Company, and Southwestern Public Service Company to Revise Existing Commission-Approved Deemed Savings for CFLs in Residential Hard-to-Reach Programs. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

- Energy Independence and Security Act of 2007
- ENERGY STAR® specifications for CFL lamps.

Document Revision History

Table 2-7: Residential Compact Fluorescent Lamp Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor corrections due to phase-in of EISA regulations, updated EUL from DEER 2014. Legacy EISA tables removed.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Introduction of interactive effects factors and in-service rates. Incorporation of Second Tier EISA standards. New peak savings calculated according to revised peak definition. Modified estimation of measure life.
v3.1	11/05/2015	TRM v3.1 update. Modification of in-service rate, revision of interactive effects factors to reflect indoor-specific values for additional heating and cooling equipment types. Provided default input assumptions for upstream lighting programs. Restricted estimated measure life to several discrete values.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. Updated IEF values and useful life estimates.
v5.0	10/2017	TRM v5.0 update. Updated useful life estimates.

2.1.2 Specialty Compact Fluorescent Lamps Measure Overview

TRM Measure ID: R-LT-SCF

Market Sector: Residential

Measure Category: Lighting

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive and Direct Install

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure provides a method for calculating savings for replacement of a specialty incandescent or halogen lamp with an ENERGY STAR®-qualified specialty CFL in residential applications. These lamps include reflectors, G-shape lamps, T-shape lamps, B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps.

Eligibility Criteria

Customer eligibility to be awarded these deemed savings is at the discretion of the utility for different program and customer types. See program-specific manuals to determine customer eligibility.

These savings values rely on usage patterns specific to indoor applications, and therefore should not be applied to outdoor lighting. However, this should not be construed to restrict upstream lighting programs, through which customers purchase efficient lighting products in-store. Future versions of this document may provide savings specific to outdoor and/or upstream applications.

Baseline Condition

The baseline wattage will be determined based on the bulb shape of the installed lamp as outlined below.

Some baseline conditions for specialty CFLs are affected by EISA and/or a DOE 2009 ruling on incandescent reflector lamps (IRLs). Based on the shape, lumen output, and/or wattage-equivalent of the installed lamp, the appropriate baseline shall be determined from one of the following categories:

- Non-Reflector Lamps, affected by EISA 2007
- Non-Reflector Lamps, not affected by EISA 2007
- Reflector Lamps affected by the DOE ruling in 2009 on IRLs
- Reflector Lamps not affected by the DOE ruling in 2009 on IRLs.

Appropriate baseline wattages are presented in Table 2-10 through Table 2-13. If a baseline cannot be determined using these tables, the following guidelines may be used to determine appropriate default baseline wattage:

- **Non-Reflector Lamps, affected by EISA 2007:** using the exact or range of the installed wattage, determine the appropriate First Tier or Second Tier EISA baseline default wattage in table below.

Table 2-8: ENERGY STAR® CFLs—Default Equivalent Wattages if Lumen Output Unknown

Wattage Range of Installed CFL ²⁵	9–11 W	12–15 W	18–20 W	23–27 W
If Unknown: Default Installed CFL Wattage ²⁶	9 W	13 W	19 W	24 W
1 st Tier EISA 2007 Default Baseline	29 W	43 W	53 W	72 W
2 nd Tier EISA 2007 Default Baseline	12 W	20 W	28 W	45 W

- Non-Reflector Lamps, not affected by EISA 2007: 60 watts²⁷
- Reflector Lamps affected by the DOE ruling in 2009 on IRLs: 60 watts²⁸
- Reflector Lamps not affected by the DOE ruling in 2009 on IRLs: the appropriate default baseline may be determined using Table 2-9.

²⁵ Wattage ranges from ENERGY STAR® light bulb savings calculator. Updated October 2016. <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

²⁶ ENERGY STAR® Certified Light Bulbs. <https://www.energystar.gov/productfinder/download/certified-light-bulbs/>. Accessed October 6, 2015. Mean wattages of omnidirectional, general purpose replacement CFL lamps by incandescent wattage equivalent.

²⁷ A 2006-2008 California Upstream Lighting Evaluation found an average incandescent wattage of 61.7 Watts (KEMA, Inc., The Cadmus Group, Itron, Inc., PA Consulting Group, Jai J. Mitchell Analytics, Draft Evaluation Report: Upstream Lighting Program. Prepared for the California Public Utilities Commission, Energy Division. December 10, 2009)

²⁸ Ibid.

Table 2-9: DOE-Ruling Exempt Reflectors—Default Wattages

Lamp Type	W _{Base}
BR30 (65 W)	65 W
BR40 (65 W)	
ER40 (65 W)	
R20 (\leq 45 W)	45 W
BR30 (\leq 50 W)	50 W
BR40 (\leq 50 watt)	
ER30 (\leq 50 watt)	
ER40 (\leq 50 watt)	
Indeterminate	60 W ²⁹

EISA Standards: Baseline for Non-Reflector Lamps

EISA-Affected

EISA-affected bulbs are:

- **G-shape lamps with a diameter less than 5 inches**
- **T-shape lamps greater than 40 watts or a length of 10 inches or less**
- **B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts.**³⁰

Baseline wattages should be adjusted as EISA regulations dictate higher efficiency standards. The second tier of EISA 2007 (EISA Tier 2) regulation goes into effect beginning January 2020. However, due to expected lamp replacement schedules, as well as retailer sell-through of existing lighting stock, the 1st Tier EISA baseline will be retained until 2021 when the 2nd Tier EISA baseline will be applied.³¹ Nevertheless, incentivized lamps installed in 2020 will be awarded savings against the 2nd Tier EISA baseline since this will be the standard in effect at the time of installation.

²⁹ Ibid.

³⁰ <http://www.lightingfacts.com/Library/Content/EISA>

³¹ This is consistent with the one-year lag applied in the Arkansas TRM Version 4.0 to new standards effective before July 1 of a given year.

Arkansas Technical Reference Manual, Version 4.0. Prepared for the Arkansas Public Service Commission. Approved in Docket 10-100-R. Section II – Protocol E. Page 48.

<http://www.apscservices.info/EEInfo/TRM4.pdf>.

Table 2-10: EISA-Affected Specialty CFL Baselines (Non-Reflectors)³²

Lamp Type	Minimum Lumens	Maximum Lumens	Incandescent Equivalent 1 st Tier EISA 2007 (W _{Base,FT})	Incandescent Equivalent 2 nd Tier EISA 2007 (W _{Base,ST}) ³³	Effective Dates For 2 nd Tier EISA 2007 Standards*
<ul style="list-style-type: none"> G-shape lamps with a diameter less than 5 inches 	310	749	29	12	1/1/2020
<ul style="list-style-type: none"> T-shape lamps greater than 40 watts or a length of 10 inches or less 	750	1,049	43	20	1/1/2020
<ul style="list-style-type: none"> B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts 	1,050	1,489	53	28	1/1/2020
<ul style="list-style-type: none"> B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts 	1,490	2,600	72	45	1/1/2020

*While 2nd Tier EISA standards are effective beginning in 2020, 1st Tier EISA baselines will be used until 2021.

EISA-Exempt

EISA-exempt bulbs are:

- **Appliance lamps, black light lamps, bug lamps, colored lamps, infrared lamps, left-hand thread lamps, marine lamps, marine signal service lamps, mine service lamps, plant light lamps, reflector lamps, rough service lamps, shatter-resistant lamps, sign service lamps, silver bowl lamps, showcase lamps, 3-way incandescent lamps, and vibration service lamps**
- **G-shape lamp with a diameter of 5 inches or more**
- **T-shape lamp of 40 watts or less or a length of more than 10 inches**
- **B, BA, CA, F, G16-1/2, G25, G30, S or M14 lamp of 40 watts or less.³⁴**

³² Ibid.

³³ Wattages developed using the 45 lumens-per-watt standard for the midpoint of the provided lumen range.

³⁴ <http://www.lightingfacts.com/Library/Content/EISA>.

Table 2-11: EISA-Exempt Specialty CFL Baselines (Non-Reflectors)

Lamp Type	Minimum Lumens	Maximum Lumens	W _{Base}
<ul style="list-style-type: none"> • Appliance lamps, black light lamps, bug lamps, colored lamps, infrared lamps, left-hand thread lamp, marine lamp, marine signal service lamp, mine service lamp, plant light lamp, reflector lamp, rough service lamp, shatter-resistant lamp, sign service lamp, silver bowl lamp, showcase lamp, 3-way incandescent lamp, vibration service lamp • G-shape lamp with a diameter of 5 inches or more • T-shape lamp of 40 watts or less or a length of more than 10 inches • B, BA, CA, F, G16-1/2, G25, G30, S or M14 lamp of 40 watts or less 			<p>Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 60 watts.³⁵</p>

DOE Standards for Incandescent Reflector Lamps (IRLs): Baseline for Reflector Lamps

DOE Ruling-Affected

Certain types of incandescent reflector bulbs are affected by a DOE 2009 ruling on reflector lamps. Products affected by the IRL ruling are:

- **R, PAR, ER, BR, BPAR lamps**
- **BR and ER lamps rated at more than 50 watts**
- **Reflector lamps between 2.25” (R18) and 2.75” (R22) in diameter**
- **40-205 Watt incandescent PAR lamps.**³⁶

Where available, the nameplate wattage of the removed lamp should be used as the baseline. Otherwise, the baseline wattage can be determined according to the lumen range of the installed lamp (see Table 2-12).

³⁵ A 2006-2008 California Upstream Lighting Evaluation found an average incandescent wattage of 61.7 Watts (KEMA, Inc., The Cadmus Group, Itron, Inc., PA Consulting Group, Jai J. Mitchell Analytics, Draft Evaluation Report: Upstream Lighting Program. Prepared for the California Public Utilities Commission, Energy Division. December 10, 2009).

³⁶ <http://www.gelighting.com/LightingWeb/na/resources/legislation/2009-department-of-energy-regulations/>
https://www1.eere.energy.gov/buildings/appliance_standards/standards.aspx?productid=23
<http://www.bulbrite.com/eisa.php>

Table 2-12: DOE IRL Ruling-Affected Specialty CFL Baselines (Reflectors)^{37,38}

Lamp Type	Lumen Range	W _{Base}
BR19	300-500	50
BR30	600-800	75
	801-1000	85
BR38	600-900	75
	901-1400	150
BR40	600-700	75
	701-900	85
	901-950	100
	951-1300	120
	1301-1700	125
	1701-2000	150
ER30	300-450	50
	451-701	75
ER40	1000-1300	120
PAR20	300-450	50
	451-550	40
	551-650	50
PAR30	450-550	35
	551-600	40
	601-850	50
	851-950	60
	951-1200	75
PAR38	550-750	65
	751-1100	75
	1101-1300	100
	1301-1600	120
	1601-2500	150
	2501-3500	175

³⁷ Wattage values and lumen ranged from a review of GE, Osram Sylvania, and Philips catalogs in January 2015, as well as the Illinois TRM 2014. GE Lighting catalog: http://www.gelighting.com/LightingWeb/na/smartcatalogs/Lighting_and_Ballasts_Section_1_Incandescent_Lamps.pdf Sylvania catalog: <http://assets.sylvania.com/assets/documents/complete-catalog.b176dbb1-d6e0-40f0-ab92-e768e58f5dc1.pdf> Philips catalog: http://www.usa.lighting.philips.com/connect/tools_literature/downloads/sg100-2013.pdf Illinois TRM 2014: <http://www.ilsag.info/technical-reference-manual.html>.

³⁸ Table 2-12 is based on manufacturers' lumen and wattage data for the most commonly used reflector lamps. However, other manufacturers' ratings may differ from this list. Where available, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer.

Lamp Type	Lumen Range	W _{Base}
R20	401-500	50
	501-600	75
	601-1000	100
R30	700-800	75
	801-950	110
	951-1100	125
R40	1300-1900	125

DOE Ruling-Exempt

The DOE 2009 ruling standards do not apply to the following types of IRLs:

- IRLs rated at 50 watts or less that are ER30, BR30, BR40, or ER40 lamps
- IRLs rated at 65 watts that are BR30, BR40, or ER40 lamps
- R20 IRLs rated 45 watts or less.³⁹

Table 2-13: DOE-Ruling Exempt Reflectors

Lamp Type	W _{Base}
BR30 (65 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 65 watts.
BR40 (65 watt)	
ER40 (65 watt)	
R20 (≤ 45 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 45 watts.
BR30 (≤ 50 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 50 watts.
BR40 (≤ 50 watt)	
ER30 (≤ 50 watt)	
ER40 (≤ 50 watt)	

High-Efficiency Condition

New CFLs must be ENERGY STAR® specialty CFLs as outlined in the latest ENERGY STAR® specification.⁴⁰ These lamps include reflectors, G-shape lamps, T-shape lamps, B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps.

These ENERGY STAR® specialty CFLs are the equivalent of the specialty incandescent or halogen lamps being replaced. The high-efficiency condition is the wattage of the lamp installed.

³⁹ http://www.gelighting.com/LightingWeb/na/resources/legislation/2009-department-of-energy-regulations/http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/58.

⁴⁰ <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

See the ENERGY STAR® website for more information on the specification in effect:
<http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Wattage reduction is defined as the difference between the wattage of a specialty baseline lamp and the wattage of a comparable CFL.

Energy Savings

For EISA-affected lamps only, annual energy (kWh) savings must be calculated separately for two time periods:

1. **First Tier EISA Baseline = 2021—installation year = 5 years**
2. **The remaining time in the EUL period**

For the first tier EISA baseline period:

$$\Delta kWh = \frac{(W_{base,FT} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 10

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kWh = \frac{(W_{base,ST} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 11

Annual energy (kWh) savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.⁴¹

For EISA- exempt lamps and reflectors (both DOE ruling-exempt and DOE ruling-affected), annual energy (kWh) savings are not calculated using the two-tiered system. Instead, annual energy (kWh) savings are calculated using one algorithm.

$$\Delta kWh = \frac{(W_{base} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 12

⁴¹ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

Where:

$W_{base,FT}$	=	<i>First tier EISA baseline wattage corresponding with the lumen output of the purchased CFL lamp for the year purchased/installed. First tier EISA baseline lamp wattage provided in Table 2-10 under the column “Incandescent Equivalent 1st Tier EISA 2007.”</i>
$W_{base,ST}$	=	<i>Second tier EISA baseline wattage corresponding with the lumen output of the purchased CFL lamp for the year purchased/installed. Second tier EISA baseline lamp wattage provided in Table 2-10 under the column “Incandescent Equivalent 2nd Tier EISA 2007.”</i>
W_{base}	=	<i>EISA-exempt specialty lamp or a DOE ruling-exempt reflector, use the nameplate wattage (see Table 2-11 and Table 2-13). If a DOE-ruling-affected IRL, use the wattages provided in Table 2-12.</i>
W_{post}	=	<i>Actual wattage of CFL purchased/installed</i>
HOU	=	<i>Average hours of use per year = 803 hours (calculated based on an average daily usage of 2.2 hours per day⁴²)</i>
IEF_E	=	<i>Interactive Effects Factor to account for cooling energy savings and heating energy penalties associated with lighting power reductions (see Table 2-14)</i>
ISR	=	<i>In-Service Rate, the percentage of incentivized units that are installed and in use (rather than removed, stored, or burnt out) to account for units incentivized but not operating = 0.97⁴³</i>

⁴² The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas ‘Make Your Mark’ Statewide CFL Program Report. Frontier Associates. June 2009.

⁴³ Dimetrosky, S., Parkinson, K., and Lieb, N. “Residential Lighting Evaluation Protocol – The Uniform Methods Project: Methods for Determining Energy Efficiency Savings for Specific Measures.” January 2015. ISR for upstream programs, including storage lamps installed within four years of purchase. <http://energy.gov/sites/prod/files/2015/02/f19/UMPCChapter21-residential-lighting-evaluation-protocol.pdf>.

Table 2-14: ENERGY STAR® Specialty CFLs—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties⁴⁴

IEF _E					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.06	1.13	1.17	1.15	1.12
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.91	1.00	1.05	1.11	0.97
Electric Resistance Heat with AC	0.65	0.80	0.90	1.00	0.75
Electric Resistance Heat with no AC	0.57	0.69	0.76	0.83	0.65
No heat with AC	1.06	1.13	1.17	1.15	1.12
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁴⁶	0.87	1.03	1.08	1.12	1.01
Upstream Lighting ⁴⁷	0.89	1.03	1.07	1.10	1.01

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Demand Savings

Summer and winter demand savings are determined by applying a coincidence factor associated with each season. For EISA-affected specialty lamps only, peak demand (kW) savings must be calculated separately for two time periods:

- 1. First Tier EISA Baseline = 2021-installation year = 5 years**
- 2. The remaining time in the EUL period.**

⁴⁴ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

⁴⁵ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

⁴⁶ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

⁴⁷ Ibid.

For the first tier EISA baseline period:

$$\Delta kW_{summer} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 13

$$\Delta kW_{winter} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 14

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kW_{summer} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 15

$$\Delta kW_{winter} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 16

Annual summer or winter peak demand savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.⁴⁸

For EISA- exempt lamps and reflectors (both DOE ruling-exempt and DOE ruling-affected), peak demand (kW) savings are not calculated using the two-tiered system. Instead, peak demand (kW) savings are calculated using one algorithm, depending on the season of the savings.

$$\Delta kW_{summer} = \frac{(W_{base} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 17

$$\Delta kW_{winter} = \frac{(W_{base} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 18

Where:

CF = Coincidence Factor (see Table 2-15)

⁴⁸ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

IEF_D = Interactive Effects Factor to account for cooling demand savings or heating demand penalties associated with lighting power reductions (see Table 2-16)

Table 2-15: ENERGY STAR® CFLs—Coincidence Factors⁴⁹

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.060	0.053	0.063	0.059	0.032
Winter	0.277	0.232	0.199	0.267	0.357

Table 2-16: ENERGY STAR® CFLs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties⁵⁰

$IEF_{D,summer}$					
Heating/Cooling Type	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.45	1.33	1.68	1.23	1.44
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	1.27	1.28	1.19	1.23	1.37
Electric Resistance Heat with AC	1.07	1.27	1.07	1.23	1.36
Electric Resistance Heat with no AC	1.00	1.00	1.00	1.00	1.00
No heat with AC	1.45	1.33	1.68	1.23	1.44
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁵¹	1.24	1.43	1.46	1.51	1.37
Upstream Lighting ⁵²	1.20	1.36	1.39	1.43	1.31

⁴⁹ See Volume 1, Appendix B.

⁵⁰ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + HVAC_{savings}/Lighting_{savings}$.

⁵¹ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Energy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

⁵² Ibid.

IEF _{D,winter}					
Heating/Cooling Type	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	0.98	0.98	0.98	0.98	0.98
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.71	0.67	0.65	0.74	0.81
Electric Resistance Heat with AC	0.44	0.36	0.38	0.42	0.52
Electric Resistance Heat with no AC	0.44	0.36	0.38	0.42	0.52
No heat with AC	0.98	0.98	0.98	0.98	0.98
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁵³	0.75	0.80	0.83	0.85	0.81
Upstream Lighting ⁵⁴	0.78	0.83	0.85	0.86	0.83

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

⁵³ Ibid.

⁵⁴ Ibid.

Measure Life and Lifetime Savings

The average measure life is based upon rated lamp life of the specialty CFL shown in the following table. The measure life assumes an average daily use of 2.2 hours per day based on blended usage for indoor/outdoor applications, and applies a 0.85 degradation factor to indoor/outdoor CFLs.

For an EISA-affected lamp, the following algorithms are designed to provide EISA Tier 1 and EISA Tier 2 measure lives, each to be applied to the appropriate tier of EISA savings.

$$EUL_{Total} = \frac{Rated\ Life \times DF}{HOU \times 365.25}$$

Equation 19

$$EUL_{Tier1} = 2021 - Purchase\ Year$$

Equation 20

$$EUL_{Tier2} = EUL_{Total} - EUL_{Tier1}$$

Equation 21

Where:

<i>Rated Life</i>	=	10,000 hours, 12,000 hours, 15,000 hours, or 20,000 hours, as specified by the manufacturer. If unknown, assume a 10,000-hour lifetime. ⁵⁵
<i>DF</i>	=	0.85 degradation factor ⁵⁶
<i>HOU</i>	=	2.2 hours per day ⁵⁷
2021	=	One-year lag applied to year that EISA Tier 1 energy efficiency standard ends

For EISA-exempt lamps and reflectors (both DOE ruling-exempt and DOE ruling-affected), use the following algorithm to calculate the measure life.

$$EUL = \frac{Rated\ Life \times DF}{HOU \times 365.25}$$

Equation 22

⁵⁵ Minimum lifetime requirement under ENERGY STAR® Lamps Specification V1.1, effective 9/30/2014. http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201_Specification.pdf

⁵⁶ ENERGY STAR® CFL Third Party Testing and Verification Off-the-Shelf CFL Performance: Batch 3. Figure 27, p. 47.

⁵⁷ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas 'Make Your Mark' Statewide CFL Program Report. Frontier Associates. June 2009.

Where:

Rated Life = 10,000 hours, 12,000 hours, 15,000 hours, or 20,000 hours, as specified by the manufacturer. If unknown, assume a 10,000-hour lifetime.⁵⁸

DF = 0.85 degradation factor⁵⁹

HOU = 2.2 hours per day⁶⁰

Table 2-17: ENERGY STAR® Specialty CFLs—Estimated Useful Life

Range of Rated Measure Life (Hours)	Assumed Rated Measure Life (Hours)	Total Measure Life (Years)	If Applicable:	
			EISA 1 st Tier Standard Baseline Measure Life (Years)	EISA 2 nd Tier Measure Life (Years)
10,000–11,000	10,000	11	3	8
11,001–13,500	12,000	13	3	10
13,501–17,500	15,000	16	3	13
≥ 17,501	20,000	20*	3	17

* Measure life capped at 20 years.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of CFLs installed
- ANSI C79.1-2002 nomenclature of CFL installed (G40, PAR, etc.)
- Wattage of each installed CFL
- Lumen output of each installed CFL
- Wattage of replaced lamp
- Manufacturer-rated lifetime of each installed CFL in hours

⁵⁸ Minimum lifetime requirement under ENERGY STAR® Lamps Specification V1.1, effective 9/30/2014. http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201_Specification.pdf.

⁵⁹ ENERGY STAR® CFL Third Party Testing and Verification Off-the-Shelf CFL Performance: Batch 3. Figure 27, p. 47.

⁶⁰ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas 'Make Your Mark' Statewide CFL Program Report. Frontier Associates. June 2009.

- Heating system type (gas, electric resistance, heat pump) for each home in which a CFL is installed
- Location of installed lamp (conditioned, unconditioned, or outdoor)
- Program type (direct install, retail)
- Baseline calculation methodology (replaced lamp nameplate wattage, EISA-affected non-reflector, EISA-exempt non-reflector, DOE ruling-affected reflector, DOE ruling-exempt reflector, manufacturer-rated equivalent incandescent wattage, or default wattage)

References and Efficiency Standards

Petitions and Rulings

Not applicable.

Relevant Standards and Reference Sources

- Energy Independence and Security Act of 2007
- *Energy Conservation Program: Energy Conservation Standards and Test Procedures for General Service Fluorescent Lamps and Incandescent Reflector Lamps*, Energy Efficiency and Renewable Energy Office (EERE), 2009
- ENERGY STAR® specifications for CFL lamps

Document Revision History

Table 2-18: Residential Specialty Compact Fluorescent Lamp Revision History

TRM Version	Date	Description of Change
v3.0	4/10/2015	TRM v3.0 origin.
v3.1	11/05/2015	TRM v3.1 update. Modification of in-service rate, revision of interactive effects factors to reflect indoor-specific values for additional heating and cooling equipment types. Consolidated default input assumptions for upstream lighting programs. Restricted estimated measure life to several discrete values.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/ 2016	TRM v4.0 update. Updated IEF values and useful life estimates.
v5.0	10/2017	TRM v5.0 update. Updated useful life estimates.

2.1.3 ENERGY STAR® Omni-Directional LED Lamps Measure Overview

TRM Measure ID: R-LT-OLED

Market Sector: Residential

Measure Category: Lighting

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive and Direct Install

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure provides a method for calculating savings for replacement of an incandescent lamp with an omni-directional LED⁶¹ in a residential application. Using ANSI C79.1-2002 nomenclature, the applicable omni-directional LED lamp types are: A, BT, P, PS, S, and T.

Eligibility Criteria

Customer eligibility to be awarded these deemed savings is at the discretion of the utility for different program and customer types. See program-specific manuals to determine customer eligibility.

These savings values rely on usage patterns specific to indoor applications, and therefore should not be applied to outdoor lighting. However, this should not be construed to restrict upstream lighting programs, through which customers purchase efficient lighting products in-store. Future versions of this document may provide savings specific to outdoor and/or upstream applications.

⁶¹ According to ENERGY STAR® omni-directional LED products "...shall have an even distribution of luminous intensity (candelas) within the 0° to 135° zone (vertically axially symmetrical). Luminous intensity at any angle within this zone shall not differ from the mean luminous intensity for the entire 0° to 135° zone by more than 20 percent. At least 5 percent of total flux (lumens) must be emitted in the 135°-180° zone. Distribution shall be vertically symmetrical as measured in three vertical planes at 0°, 45°, and 90°."

http://www.energystar.gov/ia/partners/product_specs/program_reqs/Integral_LED_Lamps_Program_Requirements.pdf.

Baseline Condition

The baseline is assumed to be the EISA-mandated maximum wattage for a general service or standard incandescent or halogen lamp (see Table 2-19). Baseline wattages should be adjusted as EISA regulations dictate higher efficiency baseline lamps. The second tier of EISA 2007 regulations go into effect beginning January 2020. At that time, general service lamps must comply with a 45 lumen per watt efficacy standard. However, due to expected lamp replacement schedules, as well as retailer sell-through of existing lighting stock, the 1st Tier EISA baseline will be retained until 2021 when the 2nd Tier EISA baseline will be applied.⁶² Nevertheless, incentivized lamps installed in 2020 will be awarded savings against the 2nd Tier EISA baseline since this will be the standard in effect at the time of installation.

Table 2-19: ENERGY STAR® Omni-Directional LEDs—EISA Baselines⁶³

Minimum Lumens	Maximum Lumens	Incandescent Equivalent Wattage Pre-EISA 2007	1 st Tier EISA 2007 (W_{Base})	2 nd Tier EISA 2007 (W_{Base}) ⁶⁴	Effective Dates For 2 nd Tier EISA 2007 Standards*
310	749	40	29	12	1/1/2020
750	1,049	60	43	20	1/1/2020
1,050	1,489	75	53	28	1/1/2020
1,490	2,600	100	72	45	1/1/2020

* While 2nd Tier EISA standards are effective beginning in 2020, 1st Tier EISA baselines will be used until 2021.

High-Efficiency Condition

LEDs must be ENERGY STAR® -qualified for the relevant lamp shape being removed as outlined in the latest ENERGY STAR® specification.⁶⁵ Using ANSI C79.1-2002 nomenclature, the applicable omni-directional LED lamp types are: A, BT, P, PS, S, and T.

The high-efficiency condition is the wattage of the lamp installed.

See the ENERGY STAR® website for more information on the specification in effect: <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

⁶² This is consistent with the one-year lag applied in the Arkansas TRM Version 4.0 to new standards effective before July 1 of a given year. Arkansas Technical Reference Manual, Version 4.0. Prepared for the Arkansas Public Service Commission. Approved in Docket 10-100-R. Section II – Protocol E. Page 48. <http://www.apscservices.info/EEInfo/TRM4.pdf>.

⁶³ In new ENERGY STAR® lighting standards effective September 2014, lumen bins associated with incandescent wattages have been assigned that do not align with those set out in EISA 2007. Due to the likelihood of continuing sell-through of existing ENERGY STAR® lighting and the on-going use of the EISA bin definitions, this TRM maintains the EISA lumen bins for assigning baseline wattage. Future iterations of the Texas TRM, however, may incorporate these new ENERGY STAR® lumen bins for baseline wattage estimates.

⁶⁴ Wattages developed using the 45 lumens-per-watt standard for the midpoint of the provided lumen range.

⁶⁵ <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Wattage reduction is defined as the difference between the wattage of a standard baseline lamp according to EISA 2007 (see Table 2-19) and the wattage of a comparable omni-directional LED. An LED is considered comparable to the baseline lamp if they are aligned on the lumen output ranges set out in EISA 2007.

Energy Savings

Annual energy (kWh) and summer peak demand (kW) savings must be calculated separately for two time periods:

1. **First Tier EISA Baseline = 2021—installation year = 5 years**
2. **The remaining time in the EUL period**

For the first tier EISA baseline period:

$$\Delta kWh = \frac{(W_{base,FT} - W_{post})}{1000} \times Hours \times ISR \times IEF_E$$

Equation 23

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kWh = \frac{(W_{base,ST} - W_{post})}{1000} \times Hours \times ISR \times IEF_E$$

Equation 24

Annual energy (kWh) savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.⁶⁶

Where:

$$W_{base,FT} = \text{First tier EISA baseline wattage corresponding with the lumen output of the purchased LED lamp for the year purchased/installed. First tier EISA baseline lamp wattage provided in Table 2-19 under the column "Incandescent Equivalent 1st Tier EISA 2007" (if unknown, see Table 2-20 for 1st Tier EISA 2007 default wattages).}$$

⁶⁶ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

Table 2-20: ENERGY STAR® Omni-Directional LEDs—Default Equivalent Wattages if Lumen Output Unknown

Wattage Range of Installed LED ⁶⁷	5–8 W	8.5–12 W	12.5–16 W	17–23 W
If Unknown: Default Installed LED Wattage ⁶⁸	7 W	10 W	12 W	17 W
1 st Tier EISA 2007 Default Baseline	29 W	43 W	53 W	72 W
2 nd Tier EISA 2007 Default Baseline	12 W	20 W	28 W	45 W

$W_{base,ST}$ = Second tier EISA baseline wattage corresponding with the lumen output of the purchased LED lamp for the year purchased/installed. Second tier EISA baseline lamp wattage provided in Table 2-19 under the column “Incandescent Equivalent 2nd Tier EISA 2007” (if unknown, see Table 2-20 for 2nd Tier EISA 2007 default wattages).

W_{post} = Actual wattage of LED purchased/installed

HOU = Average hours of use per year = 803 hours (calculated based on an average daily usage of 2.2 hours per day⁶⁹)

IEF_E = Interactive Effects Factor to account for cooling energy savings and heating energy penalties associated with lighting power reductions (see Table 2-21)

ISR = In-Service Rate, the percentage of incentivized units that are installed and in use (rather than removed, stored, or burnt out) to account for units incentivized but not operating = 0.97⁷⁰

⁶⁷ Wattage ranges from ENERGY STAR® light bulb savings calculator. Updated June 2015. <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

⁶⁸ ENERGY STAR® Certified Light Bulbs. <https://www.energystar.gov/productfinder/download/certified-light-bulbs/>. Accessed October 6, 2015. Mean wattages of omnidirectional, general purpose replacement LED lamps by incandescent wattage equivalent.

⁶⁹ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas ‘Make Your Mark’ Statewide CFL Program Report. Frontier Associates. June 2009.

⁷⁰ Dimetrosky, S., Parkinson, K. and Lieb, N., “Residential Lighting Evaluation Protocol – The Uniform Methods Project: Methods for Determining Energy Efficiency Savings for Specific Measures.” January 2015. ISR for upstream programs, including storage lamps installed within four years of purchase. <http://energy.gov/sites/prod/files/2015/02/f19/UMPCchapter21-residential-lighting-evaluation-protocol.pdf>.

Table 2-21: ENERGY STAR® Omni-Directional LEDs Interactive Effects for Cooling Energy Savings and Heating Energy Penalties⁷¹

IEF _E					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.06	1.13	1.17	1.15	1.12
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.91	1.00	1.05	1.11	0.97
Electric Resistance Heat with AC	0.65	0.80	0.90	1.00	0.75
Electric Resistance Heat with no AC	0.57	0.69	0.76	0.83	0.65
No heat with AC	1.06	1.13	1.17	1.15	1.12
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁷²	0.87	1.03	1.08	1.12	1.01
Upstream Lighting ⁷³	0.89	1.03	1.07	1.10	1.01

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Demand Savings

Summer and winter demand savings are determined by applying a coincidence factor associated with each season. Annual summer or winter peak demand (kW) savings must be calculated separately for two time periods:

1. First Tier EISA Baseline = 2021—installation year = 5 years
2. The remaining time in the EUL period

For the first tier EISA baseline period:

$$\Delta kW_{summer} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 25

⁷¹ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + HVAC_{savings}/Lighting_{savings}$.

⁷² Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Energy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Energy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

⁷³ Ibid.

$$\Delta kW_{winter} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 26

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kW_{summer} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 27

$$\Delta kW_{winter} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 28

Annual summer or winter peak demand savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.⁷⁴

Where:

CF = Coincidence Factor (see Table 2-22)

IEF_D = Interactive Effects Factor to account for cooling demand savings or heating demand penalties associated with lighting power reductions (see Table 2-23)

Table 2-22: ENERGY STAR® LEDs—Coincidence Factors⁷⁵

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.060	0.053	0.063	0.059	0.032
Winter	0.277	0.232	0.199	0.267	0.357

⁷⁴ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

⁷⁵ See Volume 1, Appendix B.

Table 2-23: ENERGY STAR® Omni-directional LEDs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties⁷⁶

IEF _{D,summer}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.45	1.33	1.68	1.23	1.44
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	1.27	1.28	1.19	1.23	1.37
Electric Resistance Heat with AC	1.07	1.27	1.07	1.23	1.36
Electric Resistance Heat with no AC	1.00	1.00	1.00	1.00	1.00
No heat with AC	1.45	1.33	1.68	1.23	1.44
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁷⁷	1.24	1.43	1.46	1.51	1.37
Upstream Lighting ⁷⁸	1.20	1.36	1.39	1.43	1.31
IEF _{D,winter}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	0.98	0.98	0.98	0.98	0.98
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.71	0.67	0.65	0.74	0.81
Electric Resistance Heat with AC	0.44	0.36	0.38	0.42	0.52
Electric Resistance Heat with no AC	0.44	0.36	0.38	0.42	0.52
No heat with AC	0.98	0.98	0.98	0.98	0.98
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ⁷⁹	0.75	0.80	0.83	0.85	0.81
Upstream Lighting ⁸⁰	0.78	0.83	0.85	0.86	0.83

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

⁷⁶ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

⁷⁷ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Energy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The average measure life is based upon rated lamp life of the LED. The measure life assumes an average use of 2.2 hours per day based on blended usage for indoor/outdoor applications, and applies a 0.85 degradation factor to indoor/outdoor LEDs. The algorithms below are designed to provide EISA Tier 1 and EISA Tier 2 measure lives, each to be applied to the appropriate tier of EISA savings.

$$EUL_{Total} = \frac{Rated\ Life \times DF}{HOU \times 365.25}$$

Equation 29

$$EUL_{Tier1} = 2021 - Purchase\ Year$$

Equation 30

$$EUL_{Tier2} = EUL_{Total} - EUL_{Tier1}$$

Equation 31

⁷⁸ Ibid.

⁷⁹ Ibid.

⁸⁰ Ibid.

Where:

- Rated Life* = 10,000 hours, 12,000 hours, 15,000 hours, or 20,000 hours, as specified by the manufacturer. If unknown, assume a 10,000-hour lifetime.⁸¹
- DF* = 0.85 degradation factor⁸²
- HOU* = 2.2 hours per day⁸³
- 2021* = One-year lag applied to year that EISA Tier 1 energy efficiency standard ends

Table 2-24: ENERGY STAR® Omni-Directional LEDs—Estimated Useful Life

Range of Rated Measure Life (Hours)	Assumed Rated Measure Life (Hours)	Total Measure Life (Years)	EISA 1 st Tier Standard Baseline Measure Life (Years)	EISA 2 nd Tier Measure Life (Years)
≤ 17,500	15,000	16	3	13
> 17,500	20,000	20*	3	17

* Measure life capped at 20 years. EUL may be deemed at 16 years in lieu of collecting manufacturer rated life.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of LEDs installed
- Wattage of each installed LED
- Lumen output of each installed LED
- Wattage of replaced lamp
- Manufacturer-rated lifetime of each installed LED in hours
- Heating system type (gas, electric resistance, heat pump) for each home in which an LED is installed
- Location of installed lamp (conditioned, unconditioned, or outdoor).

⁸¹ Minimum lifetime requirement under ENERGY STAR® Lamps Specification V1.1, effective September 30, 2014. <http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201%20Specification.pdf>.

⁸² ENERGY STAR® CFL Third Party Testing and Verification Off-the-Shelf CFL Performance: Batch 3. Figure 27, p. 47.

⁸³ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas 'Make Your Mark' Statewide CFL Program Report. Frontier Associates. June 2009.

References and Efficiency Standards

Petitions and Rulings

Not applicable.

Relevant Standards and Reference Sources

- Energy Independence and Security Act of 2007
- ENERGY STAR® specifications for LED lamps

Document Revision History

Table 2-25: Residential Omni-Directional LED Lamp Revision History

TRM Version	Date	Description of Change
v3.0	4/10/2015	TRM v3.0 origin.
v3.1	11/05/2015	TRM v3.1 update. Modification of in-service rate, revision of interactive effects factors to reflect indoor-specific values for additional heating and cooling equipment types. Provided default input assumptions for upstream lighting programs. Capped estimated measure life.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. Updated IEF values and useful life estimates.
v5.0	10/2017	TRM v5.0 update. Updated EUL algorithm to account for baseline change beginning in 2021. Included language to deem EUL.

2.1.4 ENERGY STAR® Specialty and Directional LED Lamps Measure Overview

TRM Measure ID: R-LT-DLED

Market Sector: Residential

Measure Category: Lighting

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive and Direct Install

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure provides a method for calculating savings for replacement of an incandescent or halogen reflector or decorative lamp with an ENERGY STAR® -qualified LED lamp. These lamps include reflectors, G-shape lamps, T-shape lamps, B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps.⁸⁴

Eligibility Criteria

Customer eligibility to be awarded these deemed savings is at the discretion of the utility for different program and customer types. See program-specific manuals to determine customer eligibility.

These savings values rely on usage patterns specific to indoor applications, and therefore should not be applied to outdoor lighting. However, this should not be construed to restrict upstream lighting programs, through which customers purchase efficient lighting products in-store. Future versions of this document may provide savings specific to outdoor and/or upstream applications.

⁸⁴ <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

Baseline Condition

The baseline wattage will be determined based on the bulb shape of the installed lamp as outlined below.

Some baseline conditions for specialty LEDs are affected by EISA and/or a DOE 2009 ruling on incandescent reflector lamps (IRLs). Based on the shape, lumen output, and/or wattage-equivalent of the installed lamp, the appropriate baseline shall be determined from one of the following categories:

- **Non-Reflector Lamps, affected by EISA 2007**
- **Non-Reflector Lamps, not affected by EISA 2007**
- **Reflector Lamps affected by the DOE ruling in 2009 on IRLs**
- **Reflector Lamps not affected by the DOE ruling in 2009 on IRLs.**

Appropriate baseline wattages are presented in Table 2-28 through Table 2-31. If a baseline cannot be determined using these tables, the following guidelines may be used to determine appropriate default baseline wattage:

- **Non-Reflector Lamps, affected by EISA 2007:** using the exact or range of the installed wattage, determine the appropriate First Tier or Second Tier EISA baseline default wattage in Table 2-26.

Table 2-26: ENERGY STAR® Specialty LEDs—Default Equivalent Wattages if Lumen Output Unknown

Wattage Range of Installed LED ⁸⁵	5–8 W	8.5–12 W	12.5–16 W	17–23 W
If Unknown: Default Installed LED Wattage ⁸⁶	7 W	10 W	12 W	17 W
1 st Tier EISA 2007 Default Baseline	29 W	43 W	53 W	72 W
2 nd Tier EISA 2007 Default Baseline	12 W	20 W	28 W	45 W

- **Non-Reflector Lamps, not affected by EISA 2007: 60 watts⁸⁷**
- **Reflector Lamps affected by the DOE ruling in 2009 on IRLs: 60 watts⁸⁸**
- **Reflector Lamps not affected by the DOE ruling in 2009 on IRLs:** the appropriate default baseline may be determined using Table 2-27.

⁸⁵ Wattage ranges from ENERGY STAR® light bulb savings calculator. Updated June 2015. <http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

⁸⁶ ENERGY STAR® Certified Light Bulbs. <https://www.energystar.gov/productfinder/download/certified-light-bulbs>. Accessed October 6, 2015. Mean wattages of omnidirectional, general purpose replacement LED lamps by incandescent wattage equivalent.

⁸⁷ A 2006-2008 California Upstream Lighting Evaluation found an average incandescent wattage of 61.7 Watts (KEMA, Inc., The Cadmus Group, Itron, Inc., PA Consulting Group, Jai J. Mitchell Analytics, Draft Evaluation Report: Upstream Lighting Program. Prepared for the California Public Utilities Commission, Energy Division. December 10, 2009)

⁸⁸ Ibid.

Table 2-27: DOE-Ruling Exempt Reflectors—Default Wattages

Lamp Type	W _{Base}
BR30 (65 W)	65 W
BR40 (65 W)	
ER40 (65 W)	
R20 (\leq 45 W)	45 W
BR30 (\leq 50 W)	50 W
BR40 (\leq 50 watt)	
ER30 (\leq 50 watt)	
ER40 (\leq 50 watt)	
Indeterminate	60 W ⁸⁹

EISA Standards: Baseline for Non-Reflector Lamps

EISA-Affected

EISA-affected bulbs are:

- **G-shape lamps with a diameter less than 5 inches**
- **T-shape lamps greater than 40 watts or a length of 10 inches or less**
- **B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts.**⁹⁰

Baseline wattages should be adjusted as EISA regulations dictate higher efficiency standards. The second tier of EISA 2007 (EISA Tier 2) regulation goes into effect beginning January 2020. However, due to expected lamp replacement schedules, as well as retailer sell-through of existing lighting stock, the 1st Tier EISA baseline will be retained until 2021 when the 2nd Tier EISA baseline will be applied.⁹¹ Nevertheless, incentivized lamps installed in 2020 will be awarded savings against the 2nd Tier EISA baseline since this will be the standard in effect at the time of installation.

⁸⁹ Ibid.

⁹⁰ <http://www.lightingfacts.com/Library/Content/EISA>.

⁹¹ This is consistent with the one-year lag applied in the Arkansas TRM Version 4.0 to new standards effective before July 1 of a given year. Arkansas Technical Reference Manual, Version 4.0. Prepared for the Arkansas Public Service Commission. Approved in Docket 10-100-R. Section II – Protocol E. Page 48. <http://www.apscservices.info/EEInfo/TRM4.pdf>.

Table 2-28: EISA-Affected Specialty LED Baselines (Non-Reflectors)⁹²

Lamp Type	Minimum Lumens	Maximum Lumens	Incandescent Equivalent 1 st Tier EISA 2007 ($W_{Base,FT}$)	Incandescent Equivalent 2 nd Tier EISA 2007 ($W_{Base,ST}$) ⁹³	Effective Dates For 2 nd Tier EISA 2007 Standards*
• G-shape lamps with a diameter less than 5 inches	310	749	29	12	1/1/2020
• T-shape lamps greater than 40 watts or a length of 10 inches or less	750	1,049	43	20	1/1/2020
• B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts	1,050	1,489	53	28	1/1/2020
• B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps greater than 40 watts	1,490	2,600	72	45	1/1/2020

* While 2nd Tier EISA standards are effective beginning in 2020, 1st Tier EISA baselines will be used until 2021.

EISA-Exempt

EISA-exempt bulbs are:

- **Appliance lamps, black light lamps, bug lamps, colored lamps, infrared lamps, left-hand thread lamps, marine lamps, marine signal service lamps, mine service lamps, plant light lamps, reflector lamps, rough service lamps, shatter-resistant lamps, sign service lamps, silver bowl lamps, showcase lamps, 3-way incandescent lamps, and vibration service lamps**
- **G-shape lamp with a diameter of 5 inches or more**
- **T-shape lamp of 40 watts or less or a length of more than 10 inches**
- **B, BA, CA, F, G16-1/2, G25, G30, S or M14 lamp of 40 watts or less.⁹⁴**

⁹² Ibid.

⁹³ Wattages developed using the 45 lumens-per-watt standard for the midpoint of the provided lumen range.

⁹⁴ <http://www.lightingfacts.com/Library/Content/EISA>.

Table 2-29: EISA-Exempt Specialty LED Baselines (Non-Reflectors)

Lamp Type	Minimum Lumens	Maximum Lumens	W _{Base}
<ul style="list-style-type: none"> Appliance lamps, black light lamps, bug lamps, colored lamps, infrared lamps, left-hand thread lamp, marine lamp, marine signal service lamp, mine service lamp, plant light lamp, reflector lamp, rough service lamp, shatter-resistant lamp, sign service lamp, silver bowl lamp, showcase lamp, 3-way incandescent lamp, vibration service lamp G-shape lamp with a diameter of 5 inches or more T-shape lamp of 40 watts or less or a length of more than 10 inches B, BA, CA, F, G16-1/2, G25, G30, S or M14 lamp of 40 watts or less 			<p>Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 60 watts.⁹⁵</p>

DOE Standards for Incandescent Reflector Lamps (IRLs): Baseline for Reflector Lamps

DOE Ruling-Affected

Certain types of incandescent reflector bulbs are affected by a DOE 2009 ruling on reflector lamps. Products affected by the IRL ruling are:

- **R, PAR, ER, BR, BPAR lamps**
- **BR and ER lamps rated at more than 50 watts**
- **Reflector lamps between 2.25” (R18) and 2.75” (R22) in diameter**
- **40-205 Watt incandescent PAR lamps.⁹⁶**

Where available, the nameplate wattage of the removed lamp should be used as the baseline. Otherwise, the baseline wattage can be determined according to the lumen range of the installed lamp (see Table 2-20).

⁹⁵ A 2006-2008 California Upstream Lighting Evaluation found an average incandescent wattage of 61.7 Watts (KEMA, Inc., The Cadmus Group, Itron, Inc., PA Consulting Group, Jai J. Mitchell Analytics, Draft Evaluation Report: Upstream Lighting Program. Prepared for the California Public Utilities Commission, Energy Division. December 10, 2009)

⁹⁶ <http://www.gelighting.com/LightingWeb/na/resources/legislation/2009-department-of-energy-regulations/>
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/58
<http://www.bulbrite.com/eisa.php>

Table 2-30: DOE IRL Ruling-Affected Specialty LED Baselines (Reflectors)^{97,98}

Lamp Type	Lumen Range	W _{Base}
BR19	300-500	50
BR30	600-800	75
	801-1000	85
BR38	600-900	75
	901-1400	150
BR40	600-700	75
	701-900	85
	901-950	100
	951-1300	120
	1301-1700	125
	1701-2000	150
ER30	300-450	50
	451-701	75
ER40	1000-1300	120
PAR20	300-450	50
	451-550	40
	551-650	50
PAR30	450-550	35
	551-600	40
	601-850	50
	851-950	60
	951-1200	75

⁹⁷ Wattage values and lumen ranged from a review of GE, Osram Sylvania, and Philips catalogs in January 2015, as well as the Illinois TRM 2014.

GE Lighting catalog:

[http://www.gelighting.com/LightingWeb/na/smartcatalogs/Lighting and Ballasts Section 1 Incandescent Lamps.pdf](http://www.gelighting.com/LightingWeb/na/smartcatalogs/Lighting%20and%20Ballasts%20Section%201%20Incandescent%20Lamps.pdf)

Sylvania catalog: <http://assets.sylvania.com/assets/documents/complete-catalog.b176dbb1-d6e0-40f0-ab92-e768e58f5dc1.pdf>

Philips catalog: http://www.usa.lighting.philips.com/connect/tools_literature/downloads/sg100-2013.pdf

Illinois TRM 2014: <http://www.ilsag.info/technical-reference-manual.html>

⁹⁸ Table 2-30 is based on manufacturers' lumen and wattage data for the most commonly used reflector lamps. However, other manufacturers' ratings may differ from this list. Where available, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer.

Lamp Type	Lumen Range	W _{Base}
PAR38	550-750	65
	751-1100	75
	1101-1300	100
	1301-1600	120
	1601-2500	150
	2501-3500	175
R20	401-500	50
	501-600	75
	601-1000	100
R30	700-800	75
	801-950	110
	951-1100	125
R40	1300-1900	125

DOE Ruling-Exempt

The DOE 2009 ruling standards do not apply to the following types of IRLs:

- IRLs rated at 50 watts or less that are ER30, BR30, BR40, or ER40 lamps
- IRLs rated at 65 watts that are BR30, BR40, or ER40 lamps
- R20 IRLs rated 45 watts or less.⁹⁹

Table 2-31: DOE-Ruling Exempt Reflectors

Lamp Type	W _{Base}
BR30 (65 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 65 watts.
BR40 (65 watt)	
ER40 (65 watt)	
R20 (≤ 45 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 45 watts.
BR30 (≤ 50 watt)	Nameplate wattage on the removed product. If unknown, utilities may rely on the rated incandescent wattage equivalent of the newly installed lamp as provided by the manufacturer if available. Otherwise, use 50 watts.
BR40 (≤ 50 watt)	
ER30 (≤ 50 watt)	
ER40 (≤ 50 watt)	

⁹⁹ <http://www.gelighting.com/LightingWeb/na/resources/legislation/2009-department-of-energy-regulations/>.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/58.

High-Efficiency Condition

LEDs must be ENERGY STAR® -qualified for the relevant lamp shape being removed as outlined in the latest ENERGY STAR® specification.¹⁰⁰ These lamps include reflectors, G-shape lamps, T-shape lamps, B, BA, CA, F G16-1/2, G25, G30, S or M14 lamps.

The high-efficiency condition is the wattage of the lamp installed.

See the ENERGY STAR® website for more information on the specification in effect:
<http://www.energystar.gov/products/certified-products/detail/light-bulbs>.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Wattage reduction is defined as the difference between the wattage of a specialty baseline lamp and the wattage of a directional or specialty LED.

Energy Savings

For EISA-affected lamps only, annual energy (kWh) savings must be calculated separately for two time periods:

- **First Tier EISA Baseline = 2021—installation year = 5 years**
- **The remaining time in the EUL period**

For the first tier EISA baseline period:

$$\Delta kWh = \frac{(W_{base,FT} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 32

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kWh = \frac{(W_{base,ST} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 33

Annual energy (kWh) savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.¹⁰¹

¹⁰⁰ <http://www.energystar.gov/products/certified-products/detail/light-bulbs>

¹⁰¹ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

For EISA- exempt lamps and reflectors (both DOE ruling-exempt and DOE ruling-affected), annual energy (kWh) savings are not calculated using the two-tiered system. Instead, annual energy (kWh) savings are calculated using one algorithm.

$$\Delta kWh = \frac{(W_{base} - W_{post})}{1000} \times HOU \times ISR \times IEF_E$$

Equation 34

Where:

- $W_{base,FT}$ = First tier EISA baseline wattage corresponding with the lumen output of the purchased LED lamp for the year purchased/installed. First tier EISA baseline lamp wattage provided in Table 2-28 under the column “Incandescent Equivalent 1st Tier EISA 2007.”
- $W_{base,ST}$ = Second tier EISA baseline wattage corresponding with the lumen output of the purchased LED lamp for the year purchased/installed. Second tier EISA baseline lamp wattage provided in Table 2-28 under the column “Incandescent Equivalent 2nd Tier EISA 2007”.
- W_{base} = EISA-exempt specialty lamp or a DOE ruling-exempt reflector, use the nameplate wattage (see Table 2-29 and Table 2-31. If a DOE-ruling-affected IRL, use the wattages provided in Table 2-30.
- W_{post} = Actual wattage of LED purchased/installed
- HOU = Average hours of use per year = 803 hours (calculated based on an average daily usage of 2.2 hours per day¹⁰²)
- IEF_E = Interactive Effects Factor to account for cooling energy savings and heating energy penalties associated with lighting power reductions (see Table 2-32).
- ISR = In-Service Rate, the percentage of incentivized units that are installed and in use (rather than removed, stored or burnt out) to account for units incentivized but not operating = 0.97¹⁰³

¹⁰² The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas ‘Make Your Mark’ Statewide CFL Program Report. Frontier Associates. June 2009.

¹⁰³ Dimetrosky, S., Parkinson, K. and Lieb, N. “Residential Lighting Evaluation Protocol – The Uniform Methods Project: Methods for Determining Energy Efficiency Savings for Specific Measures.” January 2015. ISR for upstream programs, including storage lamps installed within four years of purchase. <http://energy.gov/sites/prod/files/2015/02/f19/UMPCChapter21-residential-lighting-evaluation-protocol.pdf>.

Table 2-32: ENERGY STAR® Specialty and Directional LEDs—Interactive Effects for Cooling Energy Savings and Heating Energy Penalties¹⁰⁴

IEF _E					
Heating/Cooling Type	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.06	1.13	1.17	1.15	1.12
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.91	1.00	1.05	1.11	0.97
Electric Resistance Heat with AC	0.65	0.80	0.90	1.00	0.75
Electric Resistance Heat with no AC	0.57	0.69	0.76	0.83	0.65
No heat with AC	1.06	1.13	1.17	1.15	1.12
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ¹⁰⁵	0.87	1.03	1.08	1.12	1.01
Upstream Lighting ¹⁰⁶	0.89	1.03	1.07	1.10	1.01

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Demand Savings

Summer and winter demand savings are determined by applying a coincidence factor associated with each season. For EISA-affected specialty lamps only, peak demand (kW) savings must be calculated separately for two time periods:

- **First Tier EISA Baseline = 2021—installation year = 5 years**
- **The remaining time in the EUL period**

For the first tier EISA baseline period:

¹⁰⁴ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

¹⁰⁵ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Energy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

¹⁰⁶ Ibid.

$$\Delta kW_{summer} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 35

$$\Delta kW_{winter} = \frac{(W_{base,FT} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 36

For the remaining time in the EUL period, use the second tier EISA baseline:

$$\Delta kW_{summer} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 37

$$\Delta kW_{winter} = \frac{(W_{base,ST} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 38

Annual summer or winter peak demand savings are calculated by weighting the EISA first and second tier savings by the EISA first tier period and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.¹⁰⁷

For EISA- exempt lamps and reflectors (both DOE ruling-exempt and DOE ruling-affected), peak demand (kW) savings are not calculated using the two-tiered system. Instead, peak demand (kW) savings are calculated using one algorithm, depending on the season of the savings.

$$\Delta kW_{summer} = \frac{(W_{base} - W_{post})}{1000} \times CF_{summer} \times ISR \times IEF_{D,summer}$$

Equation 39

$$\Delta kW_{winter} = \frac{(W_{base} - W_{post})}{1000} \times CF_{winter} \times ISR \times IEF_{D,winter}$$

Equation 40

Where:

CF = Coincidence Factor (Table 2-33)

IEF_D = Interactive Effects Factor to account for cooling demand savings or heating demand penalties associated with lighting power reductions (see Table 2-34)

¹⁰⁷ While this appendix addresses early retirement installations, it is applicable to scenarios in which the baseline changes over the lifetime of the measure. For the purposes of this appendix, savings claimed against the Tier 1 EISA baseline may be treated as early retirement savings, and savings claimed against the Tier 2 EISA baseline may be treated as replace-on-burnout savings.

Table 2-33: ENERGY STAR® LEDs—Coincidence Factors¹⁰⁸

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.060	0.053	0.063	0.059	0.032
Winter	0.277	0.232	0.199	0.267	0.357

Table 2-34: ENERGY STAR® Specialty and Directional LEDs—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties¹⁰⁹

IEF _{D,summer}					
Heating/Cooling Type	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.45	1.33	1.68	1.23	1.44
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	1.27	1.28	1.19	1.23	1.37
Electric Resistance Heat with AC	1.07	1.27	1.07	1.23	1.36
Electric Resistance Heat with no AC	1.00	1.00	1.00	1.00	1.00
No heat with AC	1.45	1.33	1.68	1.23	1.44
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ¹¹⁰	1.24	1.43	1.46	1.51	1.37
Upstream Lighting ¹¹¹	1.20	1.36	1.39	1.43	1.31

¹⁰⁸ See Volume 1, Appendix B.

¹⁰⁹ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

¹¹⁰ Calculated using IEFs from Cadmus report, weighted using TMY CDD and HDD for Texas, and adjusted to exclude 16 percent outdoor lighting except for upstream defaults. Cadmus report: Cadmus. Energy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Energy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

¹¹¹ Ibid.

IEF _{D,winter}					
Heating/Cooling Type	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	0.98	0.98	0.98	0.98	0.98
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.71	0.67	0.65	0.74	0.81
Electric Resistance Heat with AC	0.44	0.36	0.38	0.42	0.52
Electric Resistance Heat with no AC	0.44	0.36	0.38	0.42	0.52
No heat with AC	0.98	0.98	0.98	0.98	0.98
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ¹¹²	0.75	0.80	0.83	0.85	0.81
Upstream Lighting ¹¹³	0.78	0.83	0.85	0.86	0.83

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

¹¹² Ibid.

¹¹³ Ibid.

Measure Life and Lifetime Savings

The average measure life is based upon rated lamp life of the LED. The measure life assumes an average use of 2.2 hours per day based on blended usage for indoor/outdoor applications, and applies a 0.85 degradation factor to indoor/outdoor LEDs. The algorithms below are designed to provide EISA Tier 1 and EISA Tier 2 measure lives, each to be applied to the appropriate tier of EISA savings.

$$EUL_{Total} = \frac{Rated\ Life \times DF}{HOU \times 365.25}$$

Equation 41

$$EUL_{Tier1} = 2021 - Purchase\ Year$$

Equation 42

$$EUL_{Tier2} = EUL_{Total} - EUL_{Tier1}$$

Equation 43

Where:

Rated Life = 10,000 hours, 12,000 hours, 15,000 hours, or 20,000 hours, as specified by the manufacturer. If unknown, assume a 10,000-hour lifetime.¹¹⁴

DF = 0.85 degradation factor¹¹⁵

HOU = 2.2 hours per day¹¹⁶

2021 = One-year lag applied to year that EISA Tier 1 energy efficiency standard ends

Table 2-35: ENERGY STAR® Specialty LEDs—Estimated Useful Life

Range of Rated Measure Life (Hours)	Assumed Rated Measure Life (Hours)	Total Measure Life (Years)	If Applicable:	
			EISA 1 st Tier Standard Baseline Measure Life (Years)	EISA 2 nd Tier Measure Life (Years)
≤ 17,500	15,000	16	3	13
> 17,500	20,000	20*	3	17

* Measure life capped at 20 years. EUL may be deemed at 16 years in lieu of collecting manufacturer rated life.

¹¹⁴ Minimum lifetime requirement under ENERGY STAR® Lamps Specification V1.1, effective September 30, 2014. http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Lamps%20V1%201_Specification.pdf.

¹¹⁵ ENERGY STAR® CFL Third Party Testing and Verification Off-the-Shelf CFL Performance: Batch 3. Figure 27, p. 47.

¹¹⁶ The average daily usage of 2.2 hours per day is a blended value for indoor and outdoor lamps. Source: Evaluation of 2008 Texas 'Make Your Mark' Statewide CFL Program Report. Frontier Associates. June 2009.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of LEDs installed
- ANSI C79.1-2002 nomenclature of CFL installed (G40, PAR, etc.)
- Wattage of each installed LED
- Lumen output of each installed LED
- Wattage of replaced lamp
- Manufacturer-rated lifetime of each installed LED in hours
- Heating system type (gas, electric resistance, heat pump) for each home in which a LED is installed
- Location of installed lamp (conditioned, unconditioned, or outdoor)
- Baseline calculation methodology (replaced lamp nameplate wattage, EISA-affected non-reflector, EISA-exempt non-reflector, DOE ruling-affected reflector, DOE ruling-exempt reflector, manufacturer-rated equivalent incandescent wattage, or default wattage)

References and Efficiency Standards

Petitions and Rulings

Not applicable.

Relevant Standards and Reference Sources

- Energy Independence and Security Act of 2007
- Energy Conservation Program: Energy Conservation Standards and Test Procedures for General Service Fluorescent Lamps and Incandescent Reflector Lamps, Energy Efficiency and Renewable Energy Office (EERE), 2009
- ENERGY STAR® specifications for LED lamps

Document Revision History

Table 2-36: Residential Specialty and Directional LED Lamp Revision History

TRM Version	Date	Description of Change
v3.0	4/10/2015	TRM v3.0 origin.
v3.1	11/05/2015	TRM v3.1 update. Modification of in-service rate, revision of interactive effects factors to reflect indoor-specific values for additional heating and cooling equipment types. Consolidated default input assumptions for upstream lighting programs. Capped estimated measure life.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. Updated IEF values.
v5.0	10/2017	TRM v5.0 update. Updated useful life estimates.

2.2 RESIDENTIAL: HEATING, VENTILATION, AND AIR CONDITIONING

2.2.1 Air Conditioner or Heat Pump Tune-up Measure Overview

TRM Measure ID: R-HV-TU

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure applies to central air conditioners and heat pumps of any configuration as long as everything on the checklist below can be completed. An AC tune-up involves checking, cleaning, adjusting, and resetting the equipment to factory conditions in the understanding that such measures restore operating efficiencies, on average, closer to as-new performance. This measure applies to all residential applications.

For this measure, the service technician must complete the following tasks according to industry best practices. In order to properly assess and adjust the refrigerant charge level, the unit must be operating under significant (i.e., normal) cooling load conditions. Therefore, this measure may only be performed for energy savings reporting purposes when the outdoor ambient dry bulb temperature is above 75°F, and the indoor return air dry bulb temperature is above 70°F.

Air Conditioner Inspection and Tune-Up Checklist¹¹⁷

- Tighten all electrical connections and measure voltage and current on motors
- Lubricate all moving parts, including motor and fan bearings
- Inspect and clean the condensate drain

¹¹⁷ Based on ENERGY STAR® HVAC Maintenance Checklist.
www.energystar.gov/index.cfm?c=heat_cool.pr_maintenance.

- Inspect controls of the system to ensure proper and safe operation. Check the startup/shutdown cycle of the equipment to assure the system starts, operates, and shuts off properly.
- Clean evaporator and condenser coils
- Clean indoor blower fan components
- Inspect and clean or change air filters; replacement preferred best practice
- Measure airflow via static pressure across the cooling coil and adjust to manufacturers specifications
- Check refrigerant level and adjust to manufacturer specifications
- Check capacitor functionality and capacitance and compare to OEM specifications.

Eligibility Criteria

All residential customers are eligible for this measure if they have refrigerated air conditioning 65,000 Btu/hr or less in cooling capacity that has not been serviced in the last 5 years.

Baseline Condition

The baseline is a system with some or all of the following issues:

- Dirty condenser coil
- Dirty evaporator coil
- Dirty blower wheel
- Dirty filter
- Improper airflow
- Incorrect refrigerant charge.

The baseline system efficiency should be calculated using the following formulas:

$$EER_{pre} = (1 - EL) \times EER_{post}$$

Equation 44

$$HSPF_{pre} = (1 - EL) \times HSPF_{post}$$

Equation 45

Where:

EER_{pre} = Efficiency of the cooling equipment before tune-up

EL = Efficiency loss due to dirty coils, blower, filter, improper airflow, and/or incorrect refrigerant charge = 0.05

EER_{post} = Deemed cooling efficiency of the equipment after tune-up = 11.2 EER

$HSPF_{pre}$ = Heating efficiency of the air source heat pump before tune-up

$HSPF_{post}$ = Deemed heating efficiency of air source heat pumps after tune-up = 7.7 HSPF

High-Efficiency Condition

After the tune-up, the equipment must be clean with airflows and refrigerant charges adjusted as appropriate and set forth above, with the added specification that refrigerant charge adjustments must be within +/- 3 degrees of target sub-cooling for units with thermal expansion valves (TXV) and +/- 5 degrees of target super heat for units with fixed orifices or capillary tubes.

The efficiency standard, or efficiency after the tune-up, is deemed to be the manufacturer specified energy efficiency ratio (EER) of the existing central air conditioner or heat pump, which has been determined using the following logic and standards. The useful life of an AC unit is 19 years. The useful life of a heat pump is 16 years. Therefore, it is conservatively thought that the majority of existing, functioning units were installed under the federal standard in place between January 23, 2006 and January 1, 2015, which set a baseline of 13 SEER and 7.7¹¹⁸ HSPF. A 13 SEER is equivalent to approximately 11.2 EER¹¹⁹ using the conversion developed by Lawrence Berkeley Lab and US DOE: $EER = -0.02 \times SEER^2 + 1.12 \times SEER$.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Savings are based on an assumed efficiency loss factor of 5 percent due to dirty coils, dirty filters, improper airflow, and/or incorrect refrigerant charge.¹²⁰

Energy Savings Algorithms

Heating energy savings are only applicable to heat pumps.

$$\text{Energy Savings } [kWh_{savings}] = kWh_{savings,C} + kWh_{savings,H}$$

Equation 46

$$\text{Energy (Cooling) } [kWh_{savings,C}] = \text{Capacity} \times \left(\frac{1}{EER_{pre}} - \frac{1}{EER_{post}} \right) \times EFLH_C \times \frac{1 \text{ kW}}{1,000 \text{ W}}$$

Equation 47

¹¹⁸ Code specified HSPF from federal standard effective January 23, 2006 through January 1, 2015.

¹¹⁹ Code specified 13 SEER from federal standard effective January 23, 2006 through January 1, 2015, converted to EER using $EER = -0.02 \times SEER^2 + 1.12 \times SEER$. National Renewable Energy Laboratory (NREL). "Building America House Simulation Protocols." U.S. Department of Energy. Revised October 2010. <http://www.nrel.gov/docs/fy11osti/49246.pdf>.

¹²⁰ Energy Center of Wisconsin, May 2008; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

$$\begin{aligned}
 \text{Energy (Heating)} [kWh_{\text{savings,H}}] \\
 = \text{Capacity} \times \left(\frac{1}{\text{HSPF}_{\text{pre}}} - \frac{1}{\text{HSPF}_{\text{post}}} \right) \times \text{EFLH}_H \times \frac{1 \text{ kW}}{1,000 \text{ W}}
 \end{aligned}$$

Equation 48

Where:

- Capacity* = Rated cooling capacity of the equipment based on model number [Btuh] (1 ton = 12,000 Btuh)
- EER_{pre}* = Cooling efficiency of the equipment pre-tune-up using Equation 44 [Btuh/W]
- EER_{post}* = Cooling efficiency of the equipment after the tune-up [Btuh/W]. Assume 11.2.
- HSPF_{pre}* = Heating efficiency of the equipment pre-tune-up using Equation 45 [Btuh/W]
- HSPF_{post}* = Heating efficiency of the equipment after the tune-up [Btuh/W]. Assume 7.7.
- EFLH_{C/H}* = Cooling/heating equivalent full-load hours for appropriate climate zone [hours]

Table 2-37: Equivalent full load cooling/heating hours¹²¹

Climate Zone	EFLH _C	EFLH _H
Climate Zone 1: Panhandle	1,142	1,880
Climate Zone 2: North	1,926	1,343
Climate Zone 3: South	2,209	1,127
Climate Zone 4: Valley	2,958	776
Climate Zone 5: West	1,524	1,559

¹²¹ ENERGY STAR® Central AC/HP Savings Calculator. <https://www.energystar.gov/products/certified-products/detail/heat-pumps-air-source>.

Demand Savings Algorithms

$$\text{Summer Peak Demand } [kW_{\text{savings,C}}] = \text{Capacity} \times \left(\frac{1}{EER_{\text{pre}}} - \frac{1}{EER_{\text{post}}} \right) \times DF_C \times \frac{1 \text{ kW}}{1,000 \text{ W}}$$

Equation 49

$$\text{Winter Peak Demand } [kW_{\text{savings,H}}] = \text{Capacity} \times \left(\frac{1}{HSPF_{\text{pre}}} - \frac{1}{HSPF_{\text{post}}} \right) \times DF_H \times \frac{1 \text{ kW}}{1,000 \text{ W}}$$

Equation 50

Summer and winter demand savings are determined by applying a coincidence factor for each season. Winter peak demand savings are only applicable to heat pumps.

Where:

$$DF_C = \text{Cooling demand factor}^{122} = 0.87$$

$$DF_H = \text{Heating demand factor} = 0.83 \text{ (heat pumps, default)}^{123}$$

Deemed Energy Savings Tables

Applying the above algorithms results in the deemed energy savings per ton in Table 2-38. Heating savings are only applicable for heat pumps.

Table 2-38: Deemed Energy Savings per Ton

Climate Zone	Cooling kWh Saved per Ton	Heating kWh Saved per Ton
Climate Zone 1: Panhandle	64.40	154.20
Climate Zone 2: North	108.61	110.16
Climate Zone 3: South	124.57	92.44
Climate Zone 4: Valley	166.80	63.65
Climate Zone 5: West	85.94	127.87

¹²² Air Conditioning Contractors of America (ACCA) Manual S recommends that residential air conditioners be sized at 115 percent of the maximum cooling requirement of the house. Assuming that the house's maximum cooling occurs during the hours 4 to 5 PM, the guideline leads to a coincidence factor for residential HVAC measures of $1.0/1.15 = 0.87$.

¹²³ Air Conditioning Contractors of America (ACCA) Manual S recommends that residential heat pumps be sized at 115 percent of the maximum cooling requirement of the house (for cooling dominated climates). Based on AHRI data for 1.5 to 5 ton HVAC systems, the average ratio of rated heating capacity to cooling capacity is 0.96. Assuming that the house's maximum cooling occurs during the hours 4 to 5 PM, and adjusting for the average ratio of heating to cooling capacity, the guideline leads to a coincidence factor for residential heat pumps of $0.96/1.15 = 0.83$.

Deemed Summer Demand Savings Tables

Applying the above algorithms results in the deemed summer demand savings per ton in Table 2-39.

Table 2-39: Deemed Summer Demand Savings per ton

Climate Zone	Summer Peak Demand kW Savings per Ton
All Zones	0.04906

Deemed Winter Demand Savings Tables

Applying the above algorithms results in the deemed winter demand savings per ton in Table 2-40. Winter peak demand savings are only applicable for heat pumps.

Table 2-40: Deemed Winter Demand Savings per ton

Climate Zone	Winter Peak Demand kW Savings per Ton
All Zones	0.06808

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) for a tune-up is five years.¹²⁴

According to the 2014 California Database for Energy Efficiency Resources (DEER), the estimated useful life of cleaning condenser and evaporator coils is three years¹²⁵, and the estimated useful life of refrigerant charge adjustment is ten years.¹²⁶ The other parts of the tune-up checklist are not listed in DEER, therefore five years, as referenced by the Measure Life Report, is used as the best representation of the entire tune-up.

¹²⁴ GDS Associates, Inc. (2007). Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures. Prepared for The New England State Program Working Group; Page 1-3, Table 1.

¹²⁵ 2014 California Database for Energy Efficiency Resources.
http://www.deeresources.com/files/DEER2013codeUpdate/download/DEER2014-EUL-table-update_2014-02-05.xlsx.

¹²⁶ *ibid*

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone or county
- Manufacturer
- Model Number
- Cooling capacity of the installed unit (tons)
- Type of unit
 - Air conditioner
 - Air source heat pump
- Recommended:
 - Serial number
 - Refrigerant type
 - Target superheat or subcooling
 - Post tune-up superheat or subcooling
 - Amount of refrigerant added or removed
 - Static pressures before and after tune-up
 - Return and supply dry bulb and wet bulb temperatures
 - Before and after tune-up pictures of components illustrating condition change due to cleanings (Note: pictures that include well-placed familiar objects like hand tools often provide a sense of scale and a reference for color/shading comparisons. Pictures of equipment name plates are useful).

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Document Revision History

Table 2-41: Residential Specialty and Directional LED Lamp Revision History

TRM Version	Date	Description of Change
v4.0	10/10/2015	TRM v4.0 origin.
v5.0	10/2017	TRM v5.0 update. No revision.

2.2.2 Duct Efficiency Improvement Measure Overview

TRM Measure ID: R-HV-DE

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Building Simulation Modeling

Measure Description

This measure involves sealing leaks in supply and return ducts of the HVAC distribution systems of homes or converted residences with central air conditioning. The standard approach for estimating savings in this measure is based on the results obtained via pre- and post-leakage testing as defined in this measure. Alternatively, the statewide evaluator is working with utilities to develop an approach that estimates standard savings for eligible duct sealing projects, which would bypass the need to complete leakage testing. This approach will be defined in a forthcoming guidance memo from the statewide evaluator.

Eligibility Criteria

All residential customers with refrigerated air conditioning or evaporative cooling are eligible to claim cooling savings for this measure. Customers must have central heating with either a furnace (gas or electric resistance) or a heat pump to claim heating savings.

Duct leakage should be assessed following Building Performance Institute (BPI) standards through testing. In some limited cases, where testing is not possible or unsafe (e.g. due to potential presence of asbestos), visual assessment may be satisfactory. The duct leakage testing should not be conducted in homes where either evidence of asbestos or mold is present or suspected due to the age of the home.¹²⁷

¹²⁷ The Building Performance Institute, Inc. (BPI) Standard Reference: Building Performance Institute Technical Standards for the Building Analyst Professional, v2/28/05mda, Page 1 of 17, states:

“Health and Safety:

Where the presence of asbestos, lead, mold and/or other potentially hazardous material is known or suspected, **all relevant state and federal (EPA) guidelines must be followed to ensure technician**

Utility program manuals should be consulted for health and safety considerations related to implementation of duct efficiency measures and/or testing procedures.

Duct sealing is a residential retrofit measure.

Table 2-42: Duct Sealing—Applicability

Application Type	Applicable	Notes
Retrofit	Y	Leakage-to-outside testing is required
New Construction	N	

Baseline Condition

The savings calculation methods for this measure are valid up to a maximum pre-installation leakage rate of 35 percent of total fan flow.¹²⁸ For homes with an initial leakage rate greater than 35 percent of total fan flow, savings will be awarded with respect to this cap rather than the initial leakage. Data from nearly 28,000 single-family and mobile home duct blaster tests conducted for duct efficiency improvements in Texas between 2003 and 2006 show that more than 70 percent of all pre-retrofit leakage rates fall below 38 percent total leakage.¹²⁹

Engineering calculations show that the interior temperature in those settings that exceed 38 percent total leakage would be above the thermally acceptable comfort levels published by ASHRAE in its 2009 Fundamentals publication. The proposed pre-installation leakage limits will help ensure that the deemed savings are an accurate reflection of the program’s impacts, and that the program focuses its efforts on scenarios where leakage conditions are likely to persist if unaddressed for several years.

Low-income customers¹³⁰ are exempt from the cap limiting the maximum pre-installation leakage rate to 35 percent of total fan flow.

High-Efficiency Condition

Materials used should be long-lasting materials, such as mastics, UL 181A or UL 181B approved foil tape, or aerosol-based sealants. Fabric-based duct tape is not allowed.

The selected methodology for estimating duct sealing energy savings requires duct leakage-to-outside testing using a combination duct pressurization and house pressurization.

and occupant safety. Blower door depressurization tests may not be performed in homes *where there is a risk of asbestos becoming airborne and being drawn into the dwelling.*”

¹²⁸ *Total Fan Flow = Cooling Capacity (tons) × 400*

¹²⁹ Based on data collected by Frontier Associates, LLC for investor-owned utilities in Texas.

¹³⁰ Low-income customers are income-eligible customers served through a targeted low-income energy efficiency program as described in 25.181(r). This may also apply to income-eligible customers served through a hard-to-reach program that is also delivered following the guidelines in 25.181(r).

Duct Leakage Testing

Measurements to determine pre-installation and post-installation leakage rates must be performed in accordance with utility-approved procedures. For this measure, leakage-to-outside must be directly measured. The Project Sponsor shall use the Combination Duct Blaster™ (or equivalent) and Blower Door method. Prior to beginning any installations, the Project Sponsor must submit the intended method(s) and may be required to provide the utility with evidence of competency, such as Home Energy Rating System (HERS) or North American Technician Excellence (NATE) certification. Leakage rates must be measured and reported at the average air distribution system operating pressure (25 Pa).¹³¹

Energy and Demand Savings Methodology

The annual energy and summer and winter peak demand savings to be claimed for this measure shall be calculated as a function of the reduction in duct leakage achieved, using the energy and demand savings coefficients from Table 2-43 through Table 2-45 for the climate zone in which the project was implemented and the type of heating equipment in the project home.

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings, which are expressed as linear functions of the reduction in duct leakage achieved (in CFM₂₅). Specifically, these deemed savings estimates were developed using BEopt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: the base case duct leakage rate was set to 8 CFM₂₅ per 100 square feet. Results from running the base case model provide estimated hourly energy use for the prototypical home prior to treatment. Post-treatment conditions were simulated by setting the leakage rate to 6 CFM₂₅ per 100 square feet. Results from running the change case model provide estimated hourly energy use for the prototypical home after treatment. Comparison of these two runs provides the deemed savings estimates.

Deemed savings are presented as a function of the CFM₂₅ reduction achieved, as demonstrated by leakage to outside testing using the Combination Duct Blaster™ (or equivalent) and Blower Door method. The kWh and kW per CFM₅₀ values represented by the V_E , V_S , and V_W coefficients are derived by taking the difference between annual energy use and summer and winter peak demand as estimated by the two model runs, and normalizing to the CFM₂₅ reduction achieved.

¹³¹ See RESNET Technical Committee, Proposed Amendment: Chapter 8 RESNET Standards, 800 RESNET Standard for Performance Testing and Work Scope: Enclosure and Air Distribution Leakage Testing; Section 803.2 and Table 803.1.

Deemed Energy Savings Tables

Table 2-43 presents the annual energy savings per CFM₂₅ reduction for a residential duct sealing project. The following formula shall be used to calculate annual energy savings for duct leakage reduction:

$$\text{Deemed Energy Savings (kWh)} = (DL_{pre} - DL_{post}) \times V_E$$

Equation 51

Where:

DL_{pre}	=	Pre-improvement duct leakage at 25 Pa (cu. ft./min)
DL_{post}	=	Post-improvement duct leakage at 25 Pa (cu. ft./min)
$V_{E,C}$	=	Cooling Energy Savings Coefficient in Table 2-43
$V_{E,H}$	=	Heating Energy Savings Coefficient in Table 2-43

Table 2-43: Energy Savings V_E per CFM₂₅ Reduction

Region	$V_{E,C}$: Cooling Savings		$V_{E,H}$: Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
Zone 1: Panhandle	0.82	0.21	0.07	2.75	0.71
Zone 2: North	1.05	N/A	0.03	1.19	0.31
Zone 3: South	1.23	N/A	0.02	0.85	0.26
Zone 4: Valley	1.46	N/A	0.01	0.61	0.19
Zone 5: West	1.20	0.38	0.03	1.44	0.37

Deemed Summer Demand Savings Tables

Table 2-44 presents the summer peak demand savings per CFM₂₅ reduction for a residential duct sealing project. The following formula shall be used to calculate deemed summer demand savings for duct leakage reduction:

$$\text{Deemed Summer Demand Savings (kW)} = (DL_{pre} - DL_{post}) \times V_S$$

Equation 52

Where:

DL_{pre}	=	Pre-improvement duct leakage at 25 Pa (cu. ft./min)
DL_{post}	=	Post-improvement duct leakage at 25 Pa (cu. ft./min)
V_S	=	Summer Demand Savings Coefficient in Table 2-194

Table 2-44: Summer Demand Savings V_s per CFM₂₅ Reduction

Region	Summer kW Impact per CFM ₂₅ Reduction	
	Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	9.28E-04	2.29E-04
Climate Zone 2: North	8.47E-04	N/A
Climate Zone 3: South	1.06E-03	N/A
Climate Zone 4: Valley	6.72E-04	N/A
Climate Zone 5: West	7.66E-04	1.86E-04

Deemed Winter Demand Savings Tables

Table 2-45 presents the winter peak demand savings per CFM₂₅ reduction for a residential duct sealing project. The following formula shall be used to calculate deemed winter demand savings for duct leakage reduction:

$$\text{Deemed Winter Demand Savings (kW)} = (DL_{pre} - DL_{post}) \times V_W$$

Equation 53

Where:

- DL_{pre} = Pre-improvement duct leakage at 25 Pa (cu. ft./min)
 DL_{post} = Post-improvement duct leakage at 25 Pa (cu. ft./min)
 V_W = Winter Demand Savings Coefficient in Table 2-45

Table 2-45: Winter Demand Savings V_W per CFM₂₅ Reduction

Region	kWh Impact per CFM ₂₅ Reduction		
	Gas	Resistance	Heat Pump
Climate Zone 1: Panhandle	4.38E-06	8.49E-04	1.46E-04
Climate Zone 2: North	1.22E-06	9.96E-04	6.98E-04
Climate Zone 3: South	8.60E-06	8.61E-04	5.02E-04
Climate Zone 4: Valley	1.18E-05	6.71E-04	4.06E-04
Climate Zone 5: West	6.68E-06	2.81E-04	6.69E-05

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Example Deemed Savings Calculation

Example 1. A 1,700 square foot home with a 3.5-ton central air conditioner and a gas furnace in Climate Zone 3 is found to have a pre-retrofit duct leakage rate of 600 CFM₂₅. After sealing leaks, duct leakage is estimated at 100 CFM₂₅.

$$\text{Max Initial Leakage Rate} = \left(400 \frac{\text{CFM}}{\text{ton}} \times 3.5 \text{ tons}\right) \times 35\% = 490 \text{ CFM}_{25}$$

$$\text{Reported Initial Leakage} = \text{Min}(600, 490) = 490 \text{ CFM}_{25}$$

$$DL_{pre} - DL_{post} = (490 - 100) = 390 \text{ CFM}_{25}$$

$$\text{kWh savings} = (1.23 + 0.02) \times 390 = 488 \text{ kWh}$$

$$\text{Summer kW savings} = 1.06 \times 10^{-3} \times 390 = 0.41 \text{ kW}$$

$$\text{Winter kW savings} = 8.60 \times 10^{-6} \times 390 = 0.003 \text{ kW}$$

Additional Calculators and Tools

There is a calculator to estimate the energy and demand savings associated with this measure using the algorithms described in the previous subsection.

Measure Life and Lifetime Savings

The estimated useful life (EUL) for a duct sealing measure is 18.0 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).¹³²

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Heating type (gas, resistance heat, heat pump)
- Cooling capacity of home HVAC units (tons)
- Pre-improvement duct leakage at 25 Pa (cu. ft./min)
- Post-improvement duct leakage at 25 Pa (cu. ft./min).

¹³² 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-46: Duct Efficiency Improvement Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor formatting changes, and language introduced to provide further direction for low-income customers and testing procedure. Contractors now required to track cooling capacity of HVAC equipment. Language added to reflect updates to federal standards for central heat pumps and central air conditioners.
v2.1	1/30/2015	TRM v2.1 update. Addition of language referring contractors to program manuals for information regarding health and safety precautions.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. Update of reference sources for air temperatures and densities, heating degree-days. Cooling demand savings required to be claimed.
v4.0	10/10/2016	TRM v4.0 update. Approach changed from algorithm-based to deemed savings coefficients estimated using building simulation models. Updated energy and demand savings. Added separate savings for homes with evaporative cooling. Updated measure description to eliminate eligibility for homes without a central AC, but with a ducted heating system.
v5.0	10/2017	TRM v5.0 update. Remove PY 2017 option to use energy and demand adjustment factors in combination with algorithm methodology from TRM v3.1. Added alternative approach to bypass the need to complete leakage testing in guidance memo to follow.

2.2.3 Central Air Conditioners Measure Overview

TRM Measure ID: R-HV-AC

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction, Early Retirement

Program Delivery Type(s): Prescriptive, Direct Install (Early Retirement)

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Engineering Estimates.

Measure Description

Residential replacement of an existing central air conditioning system with a new central air conditioning system in an existing building, or the installation of a new central air conditioning system in a new residential construction. Downsized systems that are right sized per a heat load calculation are also eligible. A new central air conditioning system includes an entire packaged unit, or a split system consisting of an indoor unit with a matching remote condensing unit.

Eligibility Criteria

Newly installed units must have a cooling capacity of less than 65,000 Btu/hour (5.4 tons) to be eligible for these deemed savings.

Air conditioning equipment shall be properly sized to dwelling based on ASHRAE or ACCA Manual J standards.

Manufacturer data sheets on installed air conditioning equipment or AHRI reference numbers must be provided.

Utilities should refer to the January 2015 memo, "Considerations for early replacement of residential equipment,"¹³³ when designing programs that permit savings to be claimed for early retirement. In order to receive early retirement savings, the unit to be replaced must be functioning at the time of removal with a maximum age of 24 years.

¹³³ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. "Considerations for early replacement of residential equipment." Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to Texas investor-owned utilities through the EM&V team's SharePoint.

Replacement of an evaporative cooler with a central air conditioner is eligible where the decision to change equipment types predates or is independent of the decision to install efficient equipment.

New construction projects are not eligible to receive savings for system downsizing. For system upsizing, savings should be claimed against the new construction baseline.

Baseline Condition

New construction baseline efficiency values for air conditioners are compliant with the current federal standard,¹³⁴ effective January 1, 2015. The baseline is assumed to be a new air conditioner system with an AHRI-listed SEER rating of 14.0.

For replace-on-burnout (ROB) projects, the baseline is reduced to 13.08 SEER. This value incorporates an adjustment to the baseline SEER value to reflect the percentage of current non-program replacements that do not include the installation of an AHRI-matched system.¹³⁵

For early retirement (ER) projects, the cooling baseline is reduced to 10 SEER for systems installed before January 23, 2006. For systems installed on or after January 23, 2006, the ER baseline increases to 12.44¹³⁶ SEER.

Table 2-47: Central Air Conditioner Baseline Efficiencies

Project Type	Cooling Mode
New Construction	14.00 SEER
Replace-on-Burnout	13.08 SEER
Early Retirement (as of 1/23/2006)	12.44 SEER
Early Retirement (before 1/23/2006)	10.00 SEER

High-Efficiency Condition

Table 2-48 displays the Consortium for Energy Efficiency (CEE) requirements for eligible Tier 1 air conditioners as of January 1, 2009. Energy efficiency service providers are expected to comply with the latest CEE Tier 1 requirements.

¹³⁴ DOE minimum efficiency standard for residential air conditioners/heat pumps.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75.

¹³⁵ Frontier Associates on behalf of the Electric Utility Marketing Managers of Texas (EUMMOT). "Petition to revise Existing Commission-Approved Deemed Savings Values for Central Air Conditioning and Heat Pump Systems: Docket No. 36780." Public Utility Commission of Texas. Approved August 27, 2009.

<http://interchange.puc.state.tx.us/WebApp/Interchange/application/dbapps/filings/pgSearch.asp>.

Adapted for new 14 SEER baseline.

¹³⁶ Refer to Texas TRM 2.1 for savings using 12.44 SEER baseline.

Table 2-48: Central Air Conditioner CEE Tier 1 Requirements

SEER	EER
14.5	12.0

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

New Construction and Replace-on-Burnout

Energy and summer demand savings were estimated using air conditioner performance curves developed by the National Renewable Energy Laboratory¹³⁷ for typical units in each of the following SEER ranges:

- Baseline units
- 14.5—14.9
- 15.0—15.9
- 16.0—16.9
- 17.0—17.9
- 18.0—20.9
- 21.0 and above.

14.5—16.9 SEER units were assumed to be single stage. 17.0 SEER and above units were assumed to be multi-stage.

These performance curves provide the capacity and efficiency of the air conditioners operating in cooling mode across a wide range of outside air temperatures. Unit loading was estimated as a function of outside air temperature and hours of cooling mode operation under different loadings, which were estimated using bin weather data for each weather zone.

Summer demand savings were estimated according to the expected unit performance under design conditions. The Air Conditioning Contractors of America's (ACCA) Manual S recommends that residential air conditioners be sized at 115 percent of the maximum cooling requirement of the house. Therefore, for all weather zones, it is assumed that typical HVAC systems are sized to 115 percent of their design cooling load (oversized by 15 percent). Air conditioner system output was then compared to its loading under design conditions.

The model uses the following set of normalized performance curves to scale the rated performance values as a function of outdoor dry-bulb temperature ranging from 65 to 115 degrees Fahrenheit. The total capacity and Energy Input Ratio (EIR = 1/COP) curves are a

¹³⁷ D. Cutler et al., Improved Modeling of Residential Air Conditioners and Heat Pumps for Energy Calculations. National Renewable Energy Laboratory. NREL/TP-5500-56354. January 2013. Tables 12 and 13. <http://www.nrel.gov/docs/fy13osti/56354.pdf>.

function of entering wet-bulb temperature (EWB) and outdoor dry-bulb temperature (ODB) and are both quadratic curve fits of the form:

$$y = a + b \times T_{EWB} + c \times T_{EWB}^2 + d \times T_{ODB} + e \times T_{ODB}^2 + f \times T_{EWB} \times T_{ODB}$$

Equation 54


Table 2-49: Air Conditioner Capacity Curve Coefficients

Coeff.	Single Stage	Multi-Stage/Speed	
		Low	High
a	3.670270705	3.940185508	3.109456535
b	-0.098652414	-0.104723455	-0.085520461
c	0.000955906	0.001019298	0.000863238
d	0.006552414	0.006471171	0.00863049
e	-0.0000156	-0.00000953	-0.000021
f	-0.000131877	-0.000161658	-0.000140186

Table 2-50: Air Conditioner EIR Curve Coefficients

Coeff.	Single Stage	Multi-Stage/Speed	
		Low	High
a	-3.302695861	-3.87752688	-1.990708931
b	0.137871531	0.164566276	0.093969249
c	-0.001056996	-0.001272755	-0.00073335
d	-0.012573945	-0.019956043	-0.009062553
e	0.000214638	0.000256512	0.000165099
f	-0.000145054	-0.000133539	-0.0000997

To estimate the baseline SEER value for retrofit installations, Texas A&M's Energy Systems Laboratory (ESL) surveyed dealers across the State to determine installation practices. The research found that in the event of a compressor failure out of warranty, dealers replaced the compressor 11.7 percent of the time, and replaced the condensing unit 88.3 percent of the time. Further, the condensing unit replacements consist of condensing unit-only replacements, replacements with mismatched evaporator coils, and replacements with matching evaporator coils. The percentages for these installations are as follows:

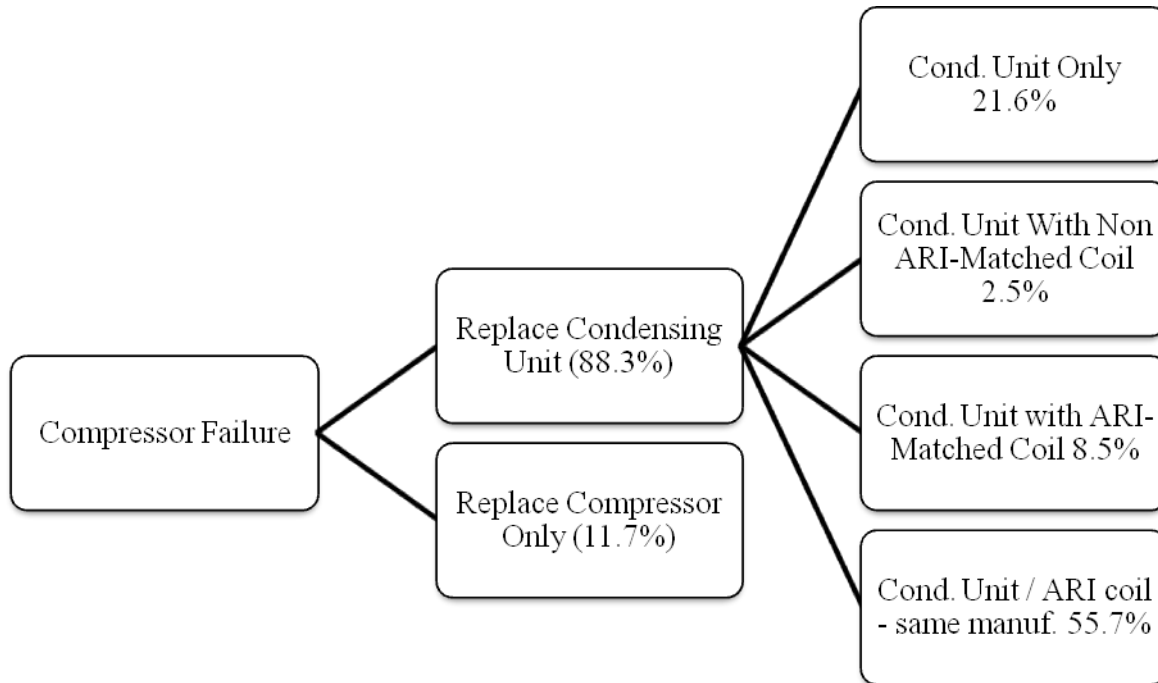

Source: Docket No. 36780

Figure 2-1: Unit Replacement Percentages upon Compressor Failure

To calculate a weighted average SEER for these installations, ESL assumed that a compressor-only replacement resulted in no increase in SEER, and that the SEER of a condensing unit installed without a matching coil would be 85 percent of the SEER value for a matched system. The ESL estimate of the baseline SEER for replacement AC units is given by the following equation:

$$\begin{aligned}
 SEER_{Base} = & (SEER_{Compressor\ Replacement}) \times (Actual\ \% \ Compressor\ Replacement) \\
 & + (SEER_{Condenser\ Replacement}) \times (Actual\ \% \ Condenser\ Replacement) \\
 & + (SEER_{System\ Replacement}) \times (Actual\ \% \ System\ Replacement)
 \end{aligned}$$

Equation 55

Substituting ESL SEER estimates and survey data provides the following baseline SEER estimate:

$$SEER_{Base} = (9.5) \times (11.7\%) + (11.05) \times (24.1\%) + (13.5) \times (64.2\%) = 12.44$$

Adjusting for the increased 14 SEER baseline:

$$SEER_{Base} = (10.5) \times (11.7\%) + (11.9) \times (24.1\%) + (14) \times (64.2\%) = 13.08$$

In new construction, there is no possibility of a partial system (e.g. condensing unit-only) change out, so the 13.08 baseline would not be appropriate. Therefore, the baseline for new construction installations is set at the federal government's minimum efficiency standard of 14 SEER.

Early Retirement

Annual energy (kWh) and summer peak demand (kW) savings must be calculated separately for two time periods:

1. The estimated remaining life of the equipment that is being removed, designated the remaining useful life (RUL), and
2. The remaining time in the EUL period (18—RUL)

Annual energy and summer peak demand savings are calculated by weighting the early retirement and replace-on-burnout savings by the RUL of the unit and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.

Where:

RUL = Remaining Useful Life (see Table 2-51); if unknown, assume the age of the replaced unit is equal to the EUL resulting in a default RUL of 7.0 years

EUL = Estimated Useful Life = 18 years

Table 2-51: Remaining Useful Life of Replaced Unit

Age of Replaced Unit (years)	Remaining Useful Life (years)	Age of Replaced Unit (years)	Remaining Useful Life (years)
1	16.8	14	8.6
2	15.8	15	8.2
3	14.9	16	7.9
4	14.1	17	7.6
5	13.3	18	7.0
6	12.6	19	6.0
7	11.9	20	5.0
8	11.3	21	4.0
9	10.8	22	3.0
10	10.3	23	2.0
11	9.8	24	1.0
12	9.4	25 ^{138,139}	0.0
13	9.0		

¹³⁸ RULs are capped at the 75th percentile of equipment age, 25 years, as determined based on DOE survival curves (see Figure 2-2). Systems older than 25 years should use the ROB baseline. See the January 2015 memo, “Considerations for early replacement of residential equipment,” for further detail.

¹³⁹ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. “Considerations for early replacement of residential equipment.” Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to Texas investor-owned utilities through the EM&V team’s SharePoint.

Derivation of RULs

Central air conditioners have an estimated useful life of 18 years. This estimate is consistent with the age at which approximately 50 percent of the central air conditioners installed in a given year will no longer be in service, as described by the survival function in Figure 2-2.

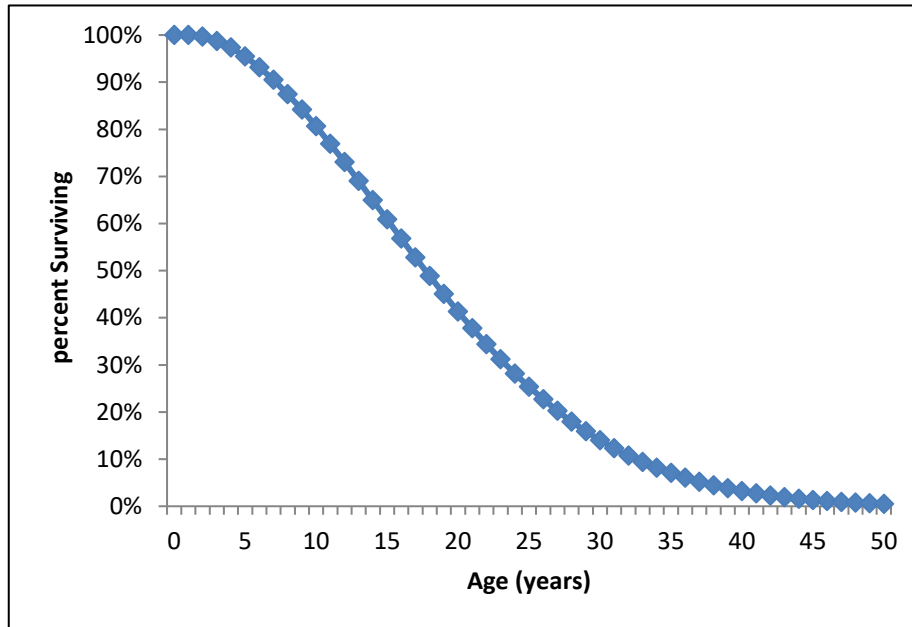


Figure 2-2: Survival Function for Central Air Conditioners¹⁴⁰

The method for estimating the remaining useful life (RUL) of a replaced system uses the age of the existing system to re-estimate the projected unit lifetime based on the survival function shown in Figure 2-2. The age of the central air conditioner being replaced is found on the horizontal axis, and the corresponding percentage of surviving air conditioners is determined from the chart. The surviving percentage value is then divided in half, creating a new estimated useful lifetime applicable to the current unit age. The age (year) that corresponds to this new percentage is read from the chart. RUL is estimated as the difference between that age and the current age of the system being replaced.

Deemed Energy Savings Tables

Table 2-52 through Table 2-56 present the energy savings (kWh) associated with central air conditioners installed in new homes. Table 2-57 through Table 2-61 present energy savings associated with replace-on-burnout of central air conditioners. Table 2-62 through Table 2-71 present energy savings associated with early retirement of central air conditioners.

¹⁴⁰ Department of Energy, Federal Register, 76 FR 37408, Technical Support Document: 8.2.3.5 Lifetime. June 2011. http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75. Download TSD at: <http://www.regulations.gov/#!documentDetail:D=EERE-2011-BT-STD-0011-0012>.

New Construction

Table 2-52 through Table 2-56 present the energy savings (kWh) associated with central air conditioners installed in new homes (14 SEER baseline) for the five Texas climate zones.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-52: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 1

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	65	124	231	396	461	617
2.0	86	166	307	529	615	822
2.5	108	207	384	661	769	1,028
3.0	129	248	461	793	922	1,234
3.5	151	290	538	925	1,076	1,439
4.0	172	331	615	1,057	1,230	1,645
5.0	215	414	769	1,322	1,537	2,056

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-53: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 2

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	105	201	374	649	753	1,008
2.0	140	268	498	865	1,004	1,343
2.5	174	335	623	1,082	1,256	1,679
3.0	209	403	748	1,298	1,507	2,015
3.5	244	470	872	1,514	1,758	2,351
4.0	279	537	997	1,731	2,009	2,687
5.0	349	671	1,246	2,163	2,511	3,359

Climate Zone 3: South Region, Houston Weather Data

Table 2-54: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 3

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	123	236	438	756	879	1,175
2.0	163	314	584	1,008	1,172	1,566
2.5	204	393	729	1,260	1,465	1,958
3.0	245	471	875	1,512	1,757	2,350
3.5	286	550	1,021	1,764	2,050	2,741
4.0	327	628	1,167	2,017	2,343	3,133
5.0	409	786	1,459	2,521	2,929	3,916

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-55: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 4

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	136	261	485	857	992	1,323
2.0	181	348	647	1,143	1,322	1,764
2.5	226	436	809	1,429	1,653	2,206
3.0	272	523	971	1,715	1,983	2,647
3.5	317	610	1,132	2,000	2,314	3,088
4.0	362	697	1,294	2,286	2,644	3,529
5.0	453	871	1,618	2,858	3,306	4,411

Climate Zone 5: West Region El Paso Weather Data

Table 2-56: Energy Savings (kWh) for 14.0 SEER New Construction Baseline—Zone 5

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	90	172	320	566	655	873
2.0	119	230	427	755	873	1,164
2.5	149	287	533	944	1,092	1,455
3.0	179	345	640	1,133	1,310	1,746
3.5	209	402	746	1,322	1,528	2,037
4.0	239	459	853	1,511	1,747	2,328
5.0	299	574	1,066	1,888	2,183	2,910

Replace-on-Burnout

Table 2-57 through Table 2-61 present the energy savings (kWh) associated with central air conditioners installed in replace-on-burnout homes (13.08 SEER baseline) for the five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-57: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	178						
2.0	754	237					
2.5	1,330	813	297				
3.0	1,906	1,389	873	356			
3.5	2,482	1,965	1,449	932	416		
4.0	3,058	2,541	2,025	1,508	992	475	
5.0	4,210	3,693	3,177	2,660	2,143	1,627	594
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	238						
2.0	814	317					
2.5	1,390	893	396				
3.0	1,966	1,469	972	475			
3.5	2,541	2,045	1,548	1,051	555		
4.0	3,117	2,621	2,124	1,627	1,131	634	
5.0	4,269	3,773	3,276	2,779	2,283	1,786	792

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	344						
2.0	920	459					
2.5	1,496	1,035	574				
3.0	2,072	1,611	1,150	688			
3.5	2,648	2,187	1,725	1,264	803		
4.0	3,224	2,763	2,301	1,840	1,379	918	
5.0	4,376	3,915	3,453	2,992	2,531	2,070	1,147
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	510						
2.0	1,086	680					
2.5	1,662	1,256	850				
3.0	2,238	1,832	1,426	1,020			
3.5	2,814	2,408	2,002	1,596	1,190		
4.0	3,390	2,984	2,578	2,172	1,766	1,360	
5.0	4,542	4,136	3,730	3,324	2,918	2,512	1,700
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	575						
2.0	1,151	766					
2.5	1,727	1,342	958				
3.0	2,303	1,918	1,534	1,149			
3.5	2,879	2,494	2,110	1,725	1,341		
4.0	3,454	3,070	2,686	2,301	1,917	1,533	
5.0	4,606	4,222	3,838	3,453	3,069	2,684	1,916

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	730						
2.0	1,306	974					
2.5	1,882	1,550	1,217				
3.0	2,458	2,126	1,793	1,461			
3.5	3,034	2,702	2,369	2,037	1,704		
4.0	3,610	3,278	2,945	2,613	2,280	1,948	
5.0	4,762	4,430	4,097	3,765	3,432	3,100	2,435

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-58: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	289						
2.0	1,222	385					
2.5	2,156	1,318	481				
3.0	3,089	2,252	1,415	577			
3.5	4,023	3,186	2,348	1,511	674		
4.0	4,956	4,119	3,282	2,445	1,607	770	
5.0	6,824	5,986	5,149	4,312	3,474	2,637	962
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	385						
2.0	1,319	514					
2.5	2,252	1,447	642				
3.0	3,186	2,381	1,576	771			
3.5	4,120	3,314	2,509	1,704	899		
4.0	5,053	4,248	3,443	2,638	1,833	1,028	
5.0	6,920	6,115	5,310	4,505	3,700	2,895	1,284

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	558						
2.0	1,491	744					
2.5	2,425	1,677	930				
3.0	3,359	2,611	1,863	1,116			
3.5	4,292	3,544	2,797	2,049	1,302		
4.0	5,226	4,478	3,730	2,983	2,235	1,488	
5.0	7,093	6,345	5,598	4,850	4,102	3,355	1,859
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	833						
2.0	1,767	1,111					
2.5	2,700	2,044	1,388				
3.0	3,634	2,978	2,322	1,666			
3.5	4,567	3,911	3,256	2,600	1,944		
4.0	5,501	4,845	4,189	3,533	2,877	2,221	
5.0	7,368	6,712	6,056	5,400	4,744	4,089	2,777
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	937						
2.0	1,871	1,250					
2.5	2,805	2,183	1,562				
3.0	3,738	3,117	2,496	1,875			
3.5	4,672	4,051	3,429	2,808	2,187		
4.0	5,605	4,984	4,363	3,742	3,121	2,500	
5.0	7,472	6,851	6,230	5,609	4,988	4,367	3,125

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,192						
2.0	2,125	1,589					
2.5	3,059	2,522	1,986				
3.0	3,992	3,456	2,920	2,383			
3.5	4,926	4,389	3,853	3,317	2,780		
4.0	5,859	5,323	4,787	4,250	3,714	3,178	
5.0	7,727	7,190	6,654	6,117	5,581	5,045	3,972

Climate Zone 3: South Region, Houston Weather Data

Table 2-59: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	338						
2.0	1,431	451					
2.5	2,524	1,544	563				
3.0	3,617	2,637	1,656	676			
3.5	4,710	3,730	2,750	1,769	789		
4.0	5,803	4,823	3,843	2,862	1,882	901	
5.0	7,990	7,009	6,029	5,048	4,068	3,088	1,127
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	451						
2.0	1,544	602					
2.5	2,637	1,695	752				
3.0	3,730	2,788	1,845	902			
3.5	4,823	3,881	2,938	1,995	1,053		
4.0	5,917	4,974	4,031	3,089	2,146	1,203	
5.0	8,103	7,160	6,217	5,275	4,332	3,389	1,504

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	653						
2.0	1,746	871					
2.5	2,839	1,964	1,089				
3.0	3,932	3,057	2,182	1,306			
3.5	5,026	4,150	3,275	2,399	1,524		
4.0	6,119	5,243	4,368	3,493	2,617	1,742	
5.0	8,305	7,429	6,554	5,679	4,803	3,928	2,177
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	972						
2.0	2,065	1,296					
2.5	3,158	2,389	1,619				
3.0	4,251	3,482	2,713	1,943			
3.5	5,344	4,575	3,806	3,036	2,267		
4.0	6,437	5,668	4,899	4,130	3,360	2,591	
5.0	8,623	7,854	7,085	6,316	5,547	4,777	3,239
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,094						
2.0	2,187	1,459					
2.5	3,280	2,552	1,824				
3.0	4,373	3,645	2,917	2,188			
3.5	5,467	4,738	4,010	3,282	2,553		
4.0	6,560	5,831	5,103	4,375	3,646	2,918	
5.0	8,746	8,017	7,289	6,561	5,832	5,104	3,647

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,390						
2.0	2,483	1,854					
2.5	3,576	2,947	2,317				
3.0	4,670	4,040	3,410	2,781			
3.5	5,763	5,133	4,503	3,874	3,244		
4.0	6,856	6,226	5,596	4,967	4,337	3,707	
5.0	9,042	8,412	7,783	7,153	6,523	5,894	4,634

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-60: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	375						
2.0	1,587	500					
2.5	2,799	1,712	625				
3.0	4,011	2,924	1,837	750			
3.5	5,223	4,136	3,049	1,962	875		
4.0	6,435	5,348	4,261	3,174	2,087	1,000	
5.0	8,860	7,772	6,685	5,598	4,511	3,424	1,250
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	500						
2.0	1,712	667					
2.5	2,924	1,879	834				
3.0	4,137	3,091	2,046	1,001			
3.5	5,349	4,303	3,258	2,213	1,167		
4.0	6,561	5,515	4,470	3,425	2,379	1,334	
5.0	8,985	7,940	6,894	5,849	4,804	3,758	1,668

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	724						
2.0	1,936	966					
2.5	3,148	2,178	1,207				
3.0	4,361	3,390	2,419	1,449			
3.5	5,573	4,602	3,631	2,661	1,690		
4.0	6,785	5,814	4,843	3,873	2,902	1,931	
5.0	9,209	8,238	7,268	6,297	5,326	4,356	2,414
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,096						
2.0	2,308	1,462					
2.5	3,520	2,674	1,827				
3.0	4,733	3,886	3,039	2,192			
3.5	5,945	5,098	4,251	3,405	2,558		
4.0	7,157	6,310	5,463	4,617	3,770	2,923	
5.0	9,581	8,734	7,888	7,041	6,194	5,347	3,654
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,231						
2.0	2,443	1,641					
2.5	3,655	2,853	2,051				
3.0	4,867	4,065	3,263	2,461			
3.5	6,079	5,277	4,475	3,673	2,871		
4.0	7,291	6,489	5,687	4,885	4,084	3,282	
5.0	9,715	8,913	8,112	7,310	6,508	5,706	4,102

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,562						
2.0	2,774	2,083					
2.5	3,986	3,295	2,604				
3.0	5,199	4,507	3,816	3,125			
3.5	6,411	5,719	5,028	4,337	3,645		
4.0	7,623	6,931	6,240	5,549	4,857	4,166	
5.0	10,047	9,356	8,664	7,973	7,282	6,590	5,208

Climate Zone 5: West Region El Paso Weather Data

Table 2-61: Energy Savings (kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	247						
2.0	1,046	329					
2.5	1,845	1,128	412				
3.0	2,644	1,927	1,211	494			
3.5	3,443	2,726	2,010	1,293	577		
4.0	4,242	3,525	2,809	2,092	1,376	659	
5.0	5,840	5,123	4,407	3,690	2,974	2,257	824
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	330						
2.0	1,129	440					
2.5	1,928	1,239	550				
3.0	2,727	2,038	1,349	660			
3.5	3,526	2,837	2,148	1,459	770		
4.0	4,325	3,636	2,947	2,258	1,569	879	
5.0	5,923	5,234	4,545	3,856	3,167	2,477	1,099

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	477						
2.0	1,276	637					
2.5	2,075	1,436	796				
3.0	2,874	2,235	1,595	955			
3.5	3,673	3,034	2,394	1,754	1,114		
4.0	4,472	3,833	3,193	2,553	1,913	1,273	
5.0	6,070	5,431	4,791	4,151	3,511	2,871	1,591
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	724						
2.0	1,523	965					
2.5	2,322	1,764	1,207				
3.0	3,121	2,563	2,006	1,448			
3.5	3,920	3,362	2,805	2,247	1,689		
4.0	4,719	4,161	3,604	3,046	2,488	1,931	
5.0	6,317	5,759	5,202	4,644	4,086	3,529	2,413
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	813						
2.0	1,612	1,083					
2.5	2,411	1,882	1,354				
3.0	3,210	2,681	2,153	1,625			
3.5	4,009	3,480	2,952	2,424	1,896		
4.0	4,808	4,279	3,751	3,223	2,695	2,167	
5.0	6,406	5,877	5,349	4,821	4,293	3,765	2,708

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,031						
2.0	1,830	1,374					
2.5	2,629	2,173	1,718				
3.0	3,428	2,972	2,517	2,061			
3.5	4,227	3,771	3,316	2,860	2,405		
4.0	5,026	4,570	4,115	3,659	3,204	2,748	
5.0	6,624	6,168	5,713	5,257	4,802	4,346	3,435

Early Retirement

Table 2-62 through Table 2-71 present the early retirement energy savings (kWh) associated with central air conditioners installed in homes for the five Texas climate zones. These savings can be used with the replace-on-burnout energy savings in Table 2-77 through Table 2-81 to calculate annual savings. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-62: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	267						
2.0	873	356					
2.5	1,478	962	445				
3.0	2,084	1,567	1,051	534			
3.5	2,689	2,173	1,656	1,140	623		
4.0	3,295	2,778	2,262	1,745	1,229	712	
5.0	4,506	3,989	3,473	2,956	2,440	1,923	890

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	327						
2.0	932	435					
2.5	1,538	1,041	544				
3.0	2,143	1,647	1,150	653			
3.5	2,749	2,252	1,756	1,259	762		
4.0	3,354	2,858	2,361	1,864	1,368	871	
5.0	4,566	4,069	3,572	3,076	2,579	2,082	1,089
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	433						
2.0	1,039	577					
2.5	1,644	1,183	722				
3.0	2,250	1,789	1,327	866			
3.5	2,855	2,394	1,933	1,472	1,010		
4.0	3,461	3,000	2,538	2,077	1,616	1,155	
5.0	4,672	4,211	3,750	3,288	2,827	2,366	1,443
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	599						
2.0	1,204	799					
2.5	1,810	1,404	998				
3.0	2,416	2,010	1,604	1,198			
3.5	3,021	2,615	2,209	1,803	1,397		
4.0	3,627	3,221	2,815	2,409	2,003	1,597	
5.0	4,838	4,432	4,026	3,620	3,214	2,808	1,996

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	664						
2.0	1,269	885					
2.5	1,875	1,490	1,106				
3.0	2,480	2,096	1,712	1,327			
3.5	3,086	2,702	2,317	1,933	1,548		
4.0	3,691	3,307	2,923	2,538	2,154	1,770	
5.0	4,903	4,518	4,134	3,750	3,365	2,981	2,212

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	819						
2.0	1,425	1,092					
2.5	2,030	1,698	1,365				
3.0	2,636	2,304	1,971	1,639			
3.5	3,242	2,909	2,577	2,244	1,912		
4.0	3,847	3,515	3,182	2,850	2,517	2,185	
5.0	5,058	4,726	4,393	4,061	3,728	3,396	2,731

Table 2-63: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	710						
2.0	1,464	947					
2.5	2,217	1,700	1,184				
3.0	2,970	2,454	1,937	1,421			
3.5	3,724	3,207	2,690	2,174	1,657		
4.0	4,477	3,960	3,444	2,927	2,411	1,894	
5.0	5,984	5,467	4,950	4,434	3,917	3,401	2,368

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	770						
2.0	1,523	1,027					
2.5	2,277	1,780	1,283				
3.0	3,030	2,533	2,036	1,540			
3.5	3,783	3,287	2,790	2,293	1,796		
4.0	4,537	4,040	3,543	3,046	2,550	2,053	
5.0	6,043	5,547	5,050	4,553	4,056	3,560	2,566
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	876						
2.0	1,630	1,168					
2.5	2,383	1,922	1,461				
3.0	3,136	2,675	2,214	1,753			
3.5	3,890	3,428	2,967	2,506	2,045		
4.0	4,643	4,182	3,721	3,259	2,798	2,337	
5.0	6,150	5,688	5,227	4,766	4,305	3,844	2,921
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,042						
2.0	1,796	1,390					
2.5	2,549	2,143	1,737				
3.0	3,302	2,896	2,490	2,084			
3.5	4,056	3,650	3,244	2,838	2,432		
4.0	4,809	4,403	3,997	3,591	3,185	2,779	
5.0	6,316	5,910	5,504	5,098	4,692	4,286	3,474

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,107						
2.0	1,860	1,476					
2.5	2,614	2,229	1,845				
3.0	3,367	2,983	2,598	2,214			
3.5	4,120	3,736	3,351	2,967	2,583		
4.0	4,874	4,489	4,105	3,720	3,336	2,952	
5.0	6,380	5,996	5,612	5,227	4,843	4,458	3,690

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,263						
2.0	2,016	1,683					
2.5	2,769	2,437	2,104				
3.0	3,523	3,190	2,858	2,525			
3.5	4,276	3,943	3,611	3,278	2,946		
4.0	5,029	4,697	4,364	4,032	3,699	3,367	
5.0	6,536	6,203	5,871	5,538	5,206	4,874	4,209

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-64: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	433						
2.0	1,414	577					
2.5	2,396	1,559	721				
3.0	3,378	2,540	1,703	866			
3.5	4,359	3,522	2,684	1,847	1,010		
4.0	5,341	4,503	3,666	2,829	1,991	1,154	
5.0	7,304	6,467	5,629	4,792	3,955	3,117	1,443

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	529						
2.0	1,511	706					
2.5	2,493	1,687	882				
3.0	3,474	2,669	1,864	1,059			
3.5	4,456	3,651	2,846	2,040	1,235		
4.0	5,437	4,632	3,827	3,022	2,217	1,412	
5.0	7,400	6,595	5,790	4,985	4,180	3,375	1,765
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	702						
2.0	1,684	936					
2.5	2,665	1,917	1,170				
3.0	3,647	2,899	2,151	1,404			
3.5	4,628	3,881	3,133	2,385	1,638		
4.0	5,610	4,862	4,115	3,367	2,619	1,872	
5.0	7,573	6,825	6,078	5,330	4,583	3,835	2,340
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	977						
2.0	1,959	1,303					
2.5	2,940	2,284	1,629				
3.0	3,922	3,266	2,610	1,954			
3.5	4,903	4,248	3,592	2,936	2,280		
4.0	5,885	5,229	4,573	3,917	3,262	2,606	
5.0	7,848	7,192	6,536	5,881	5,225	4,569	3,257

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,081						
2.0	2,063	1,442					
2.5	3,045	2,424	1,802				
3.0	4,026	3,405	2,784	2,163			
3.5	5,008	4,387	3,766	3,145	2,523		
4.0	5,989	5,368	4,747	4,126	3,505	2,884	
5.0	7,953	7,331	6,710	6,089	5,468	4,847	3,605

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,336						
2.0	2,317	1,781					
2.5	3,299	2,763	2,226				
3.0	4,280	3,744	3,208	2,671			
3.5	5,262	4,726	4,189	3,653	3,117		
4.0	6,244	5,707	5,171	4,635	4,098	3,562	
5.0	8,207	7,670	7,134	6,598	6,061	5,525	4,452

Table 2-65: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,151						
2.0	2,372	1,535					
2.5	3,593	2,756	1,919				
3.0	4,815	3,977	3,140	2,303			
3.5	6,036	5,198	4,361	3,524	2,686		
4.0	7,257	6,419	5,582	4,745	3,907	3,070	
5.0	9,699	8,862	8,024	7,187	6,350	5,512	3,838

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,248						
2.0	2,469	1,664					
2.5	3,690	2,885	2,080				
3.0	4,911	4,106	3,301	2,496			
3.5	6,132	5,327	4,522	3,717	2,912		
4.0	7,353	6,548	5,743	4,938	4,133	3,328	
5.0	9,796	8,990	8,185	7,380	6,575	5,770	4,160
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,420						
2.0	2,642	1,894					
2.5	3,863	3,115	2,367				
3.0	5,084	4,336	3,589	2,841			
3.5	6,305	5,557	4,810	4,062	3,314		
4.0	7,526	6,778	6,031	5,283	4,535	3,788	
5.0	9,968	9,220	8,473	7,725	6,978	6,230	4,735
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,696						
2.0	2,917	2,261					
2.5	4,138	3,482	2,826				
3.0	5,359	4,703	4,047	3,391			
3.5	6,580	5,924	5,268	4,612	3,957		
4.0	7,801	7,145	6,489	5,833	5,178	4,522	
5.0	10,243	9,587	8,932	8,276	7,620	6,964	5,652

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,800						
2.0	3,021	2,400					
2.5	4,242	3,621	3,000				
3.0	5,463	4,842	4,221	3,600			
3.5	6,684	6,063	5,442	4,821	4,200		
4.0	7,905	7,284	6,663	6,042	5,421	4,800	
5.0	10,348	9,727	9,105	8,484	7,863	7,242	6,000

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,054						
2.0	3,275	2,739					
2.5	4,496	3,960	3,424				
3.0	5,717	5,181	4,645	4,108			
3.5	6,939	6,402	5,866	5,330	4,793		
4.0	8,160	7,623	7,087	6,551	6,014	5,478	
5.0	10,602	10,065	9,529	8,993	8,456	7,920	6,847

Climate Zone 3: South Region, Houston Weather Data

Table 2-66: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	507						
2.0	1,656	676					
2.5	2,805	1,825	845				
3.0	3,955	2,974	1,994	1,014			
3.5	5,104	4,124	3,143	2,163	1,182		
4.0	6,253	5,273	4,293	3,312	2,332	1,351	
5.0	8,552	7,572	6,591	5,611	4,630	3,650	1,689

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	620						
2.0	1,769	826					
2.5	2,919	1,976	1,033				
3.0	4,068	3,125	2,182	1,240			
3.5	5,217	4,274	3,332	2,389	1,446		
4.0	6,366	5,424	4,481	3,538	2,596	1,653	
5.0	8,665	7,722	6,780	5,837	4,894	3,952	2,066
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	822						
2.0	1,971	1,096					
2.5	3,121	2,245	1,370				
3.0	4,270	3,394	2,519	1,644			
3.5	5,419	4,544	3,668	2,793	1,918		
4.0	6,568	5,693	4,818	3,942	3,067	2,192	
5.0	8,867	7,992	7,116	6,241	5,366	4,490	2,740
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,140						
2.0	2,290	1,521					
2.5	3,439	2,670	1,901				
3.0	4,588	3,819	3,050	2,281			
3.5	5,738	4,968	4,199	3,430	2,661		
4.0	6,887	6,118	5,349	4,579	3,810	3,041	
5.0	9,186	8,416	7,647	6,878	6,109	5,340	3,801

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,263						
2.0	2,412	1,684					
2.5	3,562	2,833	2,105				
3.0	4,711	3,983	3,254	2,526			
3.5	5,860	5,132	4,404	3,675	2,947		
4.0	7,010	6,281	5,553	4,824	4,096	3,368	
5.0	9,308	8,580	7,851	7,123	6,395	5,666	4,210

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,559						
2.0	2,708	2,079					
2.5	3,858	3,228	2,598				
3.0	5,007	4,377	3,748	3,118			
3.5	6,156	5,527	4,897	4,267	3,638		
4.0	7,306	6,676	6,046	5,417	4,787	4,157	
5.0	9,604	8,975	8,345	7,715	7,086	6,456	5,197

Table 2-67: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,348						
2.0	2,778	1,797					
2.5	4,208	3,227	2,247				
3.0	5,637	4,657	3,677	2,696			
3.5	7,067	6,087	5,106	4,126	3,145		
4.0	8,497	7,516	6,536	5,556	4,575	3,595	
5.0	11,356	10,376	9,396	8,415	7,435	6,454	4,494

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,461						
2.0	2,891	1,948					
2.5	4,321	3,378	2,435				
3.0	5,750	4,808	3,865	2,922			
3.5	7,180	6,237	5,295	4,352	3,409		
4.0	8,610	7,667	6,725	5,782	4,839	3,896	
5.0	11,469	10,527	9,584	8,641	7,699	6,756	4,871
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,663						
2.0	3,093	2,218					
2.5	4,523	3,647	2,772				
3.0	5,952	5,077	4,202	3,326			
3.5	7,382	6,507	5,631	4,756	3,881		
4.0	8,812	7,937	7,061	6,186	5,311	4,435	
5.0	11,671	10,796	9,921	9,045	8,170	7,295	5,544
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,982						
2.0	3,411	2,642					
2.5	4,841	4,072	3,303				
3.0	6,271	5,502	4,733	3,963			
3.5	7,701	6,932	6,162	5,393	4,624		
4.0	9,130	8,361	7,592	6,823	6,054	5,285	
5.0	11,990	11,221	10,452	9,682	8,913	8,144	6,606

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,104						
2.0	3,534	2,806					
2.5	4,964	4,235	3,507				
3.0	6,393	5,665	4,937	4,208			
3.5	7,823	7,095	6,367	5,638	4,910		
4.0	9,253	8,525	7,796	7,068	6,340	5,611	
5.0	12,112	11,384	10,656	9,927	9,199	8,471	7,014

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,400						
2.0	3,830	3,200					
2.5	5,260	4,630	4,001				
3.0	6,690	6,060	5,430	4,801			
3.5	8,119	7,490	6,860	6,230	5,601		
4.0	9,549	8,919	8,290	7,660	7,030	6,401	
5.0	12,409	11,779	11,149	10,520	9,890	9,260	8,001

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-68: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	562						
2.0	1,836	749					
2.5	3,111	2,024	937				
3.0	4,385	3,298	2,211	1,124			
3.5	5,660	4,573	3,485	2,398	1,311		
4.0	6,934	5,847	4,760	3,673	2,586	1,498	
5.0	9,483	8,396	7,309	6,222	5,135	4,047	1,873

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	687						
2.0	1,962	916					
2.5	3,236	2,191	1,146				
3.0	4,511	3,465	2,420	1,375			
3.5	5,785	4,740	3,695	2,649	1,604		
4.0	7,060	6,014	4,969	3,924	2,878	1,833	
5.0	9,609	8,563	7,518	6,473	5,427	4,382	2,291
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	911						
2.0	2,186	1,215					
2.5	3,460	2,490	1,519				
3.0	4,735	3,764	2,793	1,823			
3.5	6,009	5,039	4,068	3,097	2,127		
4.0	7,284	6,313	5,342	4,372	3,401	2,430	
5.0	9,833	8,862	7,891	6,921	5,950	4,979	3,038
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,283						
2.0	2,558	1,711					
2.5	3,832	2,986	2,139				
3.0	5,107	4,260	3,413	2,567			
3.5	6,381	5,534	4,688	3,841	2,994		
4.0	7,656	6,809	5,962	5,116	4,269	3,422	
5.0	10,205	9,358	8,511	7,664	6,818	5,971	4,278

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,418						
2.0	2,692	1,890					
2.5	3,967	3,165	2,363				
3.0	5,241	4,439	3,637	2,835			
3.5	6,516	5,714	4,912	4,110	3,308		
4.0	7,790	6,988	6,186	5,384	4,582	3,781	
5.0	10,339	9,537	8,735	7,933	7,131	6,329	4,726

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,749						
2.0	3,024	2,332					
2.5	4,298	3,607	2,916				
3.0	5,573	4,881	4,190	3,499			
3.5	6,847	6,156	5,464	4,773	4,082		
4.0	8,122	7,430	6,739	6,048	5,356	4,665	
5.0	10,671	9,979	9,288	8,597	7,905	7,214	5,831

Table 2-69: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,495						
2.0	3,080	1,993					
2.5	4,666	3,579	2,491				
3.0	6,251	5,164	4,077	2,990			
3.5	7,837	6,749	5,662	4,575	3,488		
4.0	9,422	8,335	7,248	6,161	5,073	3,986	
5.0	12,593	11,506	10,419	9,331	8,244	7,157	4,983

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,620						
2.0	3,206	2,160					
2.5	4,791	3,746	2,700				
3.0	6,377	5,331	4,286	3,241			
3.5	7,962	6,917	5,871	4,826	3,781		
4.0	9,547	8,502	7,457	6,411	5,366	4,321	
5.0	12,718	11,673	10,628	9,582	8,537	7,492	5,401
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,844						
2.0	3,430	2,459					
2.5	5,015	4,044	3,074				
3.0	6,601	5,630	4,659	3,689			
3.5	8,186	7,215	6,245	5,274	4,303		
4.0	9,771	8,801	7,830	6,859	5,889	4,918	
5.0	12,942	11,972	11,001	10,030	9,060	8,089	6,148
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,216						
2.0	3,802	2,955					
2.5	5,387	4,540	3,694				
3.0	6,972	6,126	5,279	4,432			
3.5	8,558	7,711	6,865	6,018	5,171		
4.0	10,143	9,297	8,450	7,603	6,757	5,910	
5.0	13,314	12,468	11,621	10,774	9,927	9,081	7,387

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,351						
2.0	3,936	3,134					
2.5	5,521	4,720	3,918				
3.0	7,107	6,305	5,503	4,701			
3.5	8,692	7,890	7,089	6,287	5,485		
4.0	10,278	9,476	8,674	7,872	7,070	6,268	
5.0	13,449	12,647	11,845	11,043	10,241	9,439	7,835

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,682						
2.0	4,268	3,576					
2.5	5,853	5,162	4,470				
3.0	7,439	6,747	6,056	5,364			
3.5	9,024	8,333	7,641	6,950	6,259		
4.0	10,609	9,918	9,227	8,535	7,844	7,153	
5.0	13,780	13,089	12,398	11,706	11,015	10,324	8,941

Climate Zone 5: West Region El Paso Weather Data

Table 2-70: Energy Savings (kWh) for 12.44 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	370						
2.0	1,211	494					
2.5	2,051	1,334	617				
3.0	2,891	2,174	1,457	741			
3.5	3,731	3,014	2,298	1,581	864		
4.0	4,571	3,854	3,138	2,421	1,704	988	
5.0	6,251	5,535	4,818	4,101	3,385	2,668	1,235

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	453						
2.0	1,293	604					
2.5	2,133	1,444	755				
3.0	2,973	2,284	1,595	906			
3.5	3,814	3,124	2,435	1,746	1,057		
4.0	4,654	3,965	3,276	2,586	1,897	1,208	
5.0	6,334	5,645	4,956	4,267	3,578	2,889	1,510
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	601						
2.0	1,441	801					
2.5	2,281	1,641	1,001				
3.0	3,121	2,481	1,841	1,202			
3.5	3,961	3,321	2,681	2,042	1,402		
4.0	4,801	4,161	3,522	2,882	2,242	1,602	
5.0	6,482	5,842	5,202	4,562	3,922	3,282	2,003
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	847						
2.0	1,687	1,130					
2.5	2,528	1,970	1,412				
3.0	3,368	2,810	2,252	1,695			
3.5	4,208	3,650	3,092	2,535	1,977		
4.0	5,048	4,490	3,933	3,375	2,817	2,259	
5.0	6,728	6,170	5,613	5,055	4,497	3,940	2,824

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	936						
2.0	1,776	1,248					
2.5	2,616	2,088	1,560				
3.0	3,456	2,928	2,400	1,872			
3.5	4,296	3,768	3,240	2,712	2,184		
4.0	5,136	4,608	4,080	3,552	3,024	2,496	
5.0	6,817	6,288	5,760	5,232	4,704	4,176	3,120

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,154						
2.0	1,994	1,539					
2.5	2,834	2,379	1,923				
3.0	3,674	3,219	2,763	2,308			
3.5	4,514	4,059	3,603	3,148	2,693		
4.0	5,354	4,899	4,444	3,988	3,533	3,077	
5.0	7,035	6,579	6,124	5,668	5,213	4,757	3,846

Table 2-71: Energy Savings (kWh) for 10.0 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	985						
2.0	2,030	1,314					
2.5	3,076	2,359	1,642				
3.0	4,121	3,404	2,687	1,971			
3.5	5,166	4,449	3,732	3,016	2,299		
4.0	6,211	5,494	4,778	4,061	3,344	2,628	
5.0	8,301	7,584	6,868	6,151	5,435	4,718	3,285

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,068						
2.0	2,113	1,424					
2.5	3,158	2,469	1,780				
3.0	4,203	3,514	2,825	2,136			
3.5	5,248	4,559	3,870	3,181	2,492		
4.0	6,294	5,604	4,915	4,226	3,537	2,848	
5.0	8,384	7,695	7,006	6,317	5,627	4,938	3,560
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,216						
2.0	2,261	1,621					
2.5	3,306	2,666	2,026				
3.0	4,351	3,711	3,071	2,431			
3.5	5,396	4,756	4,116	3,477	2,837		
4.0	6,441	5,801	5,162	4,522	3,882	3,242	
5.0	8,531	7,892	7,252	6,612	5,972	5,332	4,052
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,462						
2.0	2,507	1,950					
2.5	3,552	2,995	2,437				
3.0	4,598	4,040	3,482	2,925			
3.5	5,643	5,085	4,527	3,970	3,412		
4.0	6,688	6,130	5,572	5,015	4,457	3,899	
5.0	8,778	8,220	7,663	7,105	6,547	5,990	4,874

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,551						
2.0	2,596	2,068					
2.5	3,641	3,113	2,585				
3.0	4,686	4,158	3,630	3,102			
3.5	5,731	5,203	4,675	4,147	3,619		
4.0	6,776	6,248	5,720	5,192	4,664	4,136	
5.0	8,867	8,338	7,810	7,282	6,754	6,226	5,169
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,769						
2.0	2,814	2,359					
2.5	3,859	3,404	2,948				
3.0	4,904	4,449	3,993	3,538			
3.5	5,949	5,494	5,038	4,583	4,127		
4.0	6,994	6,539	6,083	5,628	5,173	4,717	
5.0	9,085	8,629	8,174	7,718	7,263	6,807	5,896

Deemed Summer Demand Savings Tables

Air conditioners 17 SEER or greater are assumed to be two-stage air conditioners, while those under 17 SEER are assumed to be single-stage air conditioners. This results in slightly lower summer demand savings for 17.0-17.9 SEER air conditioners as compared to 16.0-16.9 SEER units.

New Construction

Table 2-72 through Table 2-76 present the summer demand savings (kW) associated with central air conditioners installed in new homes (14.0 SEER baseline) for the five Texas climate zones.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-72: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 1

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	0.06	0.12	0.22	0.16	0.24	0.35
2.0	0.08	0.16	0.29	0.21	0.31	0.47
2.5	0.10	0.19	0.36	0.27	0.39	0.59
3.0	0.12	0.23	0.43	0.32	0.47	0.71
3.5	0.14	0.27	0.50	0.37	0.55	0.82
4.0	0.16	0.31	0.58	0.42	0.63	0.94
5.0	0.20	0.39	0.72	0.53	0.79	1.18

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-73: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 2

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	0.06	0.12	0.23	0.18	0.26	0.38
2.0	0.09	0.16	0.31	0.24	0.34	0.50
2.5	0.11	0.21	0.38	0.30	0.43	0.63
3.0	0.13	0.25	0.46	0.35	0.52	0.76
3.5	0.15	0.29	0.53	0.41	0.60	0.88
4.0	0.17	0.33	0.61	0.47	0.69	1.01
5.0	0.21	0.41	0.76	0.59	0.86	1.26

Climate Zone 3: South Region, Houston Weather Data

Table 2-74: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 3

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	0.06	0.12	0.22	0.15	0.23	0.35
2.0	0.08	0.16	0.30	0.21	0.31	0.46
2.5	0.10	0.20	0.37	0.26	0.39	0.58
3.0	0.12	0.24	0.45	0.31	0.47	0.69
3.5	0.15	0.28	0.52	0.36	0.55	0.81
4.0	0.17	0.32	0.59	0.41	0.62	0.92
5.0	0.21	0.40	0.74	0.51	0.78	1.16

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-75: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 4

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	0.05	0.09	0.17	0.22	0.28	0.40
2.0	0.06	0.12	0.23	0.30	0.37	0.53
2.5	0.08	0.16	0.29	0.37	0.46	0.66
3.0	0.10	0.19	0.35	0.45	0.56	0.80
3.5	0.11	0.22	0.41	0.52	0.65	0.93
4.0	0.13	0.25	0.46	0.60	0.74	1.06
5.0	0.16	0.31	0.58	0.75	0.93	1.33

Climate Zone 5: West Region El Paso Weather Data

Table 2-76: Summer Demand Savings for 14.0 SEER New Construction Burnout Baseline—Zone 5

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	0.06	0.11	0.21	0.19	0.26	0.39
2.0	0.08	0.15	0.28	0.25	0.35	0.52
2.5	0.10	0.19	0.35	0.31	0.43	0.65
3.0	0.12	0.23	0.42	0.38	0.52	0.78
3.5	0.14	0.27	0.49	0.44	0.61	0.90
4.0	0.16	0.30	0.57	0.50	0.70	1.03
5.0	0.20	0.38	0.71	0.63	0.87	1.29

Replace-on-Burnout

Table 2-77 through Table 2-81 present the summer demand savings (kW) associated with central air conditioners installed in replace-on-burnout homes (13.08 SEER baseline) for the five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-77: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.71	0.22					
2.5	1.25	0.76	0.28				
3.0	1.79	1.30	0.82	0.33			
3.5	2.33	1.84	1.36	0.87	0.39		
4.0	2.87	2.38	1.90	1.41	0.93	0.45	
5.0	3.94	3.46	2.98	2.49	2.01	1.52	0.56
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.76	0.30					
2.5	1.30	0.84	0.37				
3.0	1.84	1.38	0.91	0.45			
3.5	2.38	1.92	1.45	0.99	0.52		
4.0	2.92	2.46	1.99	1.52	1.06	0.59	
5.0	4.00	3.53	3.07	2.60	2.14	1.67	0.74
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.86	0.43					
2.5	1.40	0.97	0.54				
3.0	1.94	1.51	1.08	0.64			
3.5	2.48	2.05	1.62	1.18	0.75		
4.0	3.02	2.59	2.16	1.72	1.29	0.86	
5.0	4.10	3.67	3.24	2.80	2.37	1.94	1.07

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.81	0.35					
2.5	1.34	0.89	0.44				
3.0	1.88	1.43	0.98	0.53			
3.5	2.42	1.97	1.52	1.07	0.62		
4.0	2.96	2.51	2.06	1.61	1.16	0.71	
5.0	4.04	3.59	3.14	2.69	2.24	1.79	0.88
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.88	0.46					
2.5	1.42	1.00	0.57				
3.0	1.96	1.54	1.11	0.68			
3.5	2.50	2.08	1.65	1.22	0.80		
4.0	3.04	2.61	2.19	1.76	1.34	0.91	
5.0	4.12	3.69	3.27	2.84	2.42	1.99	1.14
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.00	0.61					
2.5	1.54	1.15	0.76				
3.0	2.08	1.69	1.30	0.92			
3.5	2.62	2.23	1.84	1.46	1.07		
4.0	3.16	2.77	2.38	2.00	1.61	1.22	
5.0	4.24	3.85	3.46	3.08	2.69	2.30	1.53

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-78: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.18						
2.0	0.75	0.24					
2.5	1.32	0.81	0.29				
3.0	1.89	1.38	0.87	0.35			
3.5	2.47	1.95	1.44	0.93	0.41		
4.0	3.04	2.53	2.01	1.50	0.99	0.47	
5.0	4.18	3.67	3.16	2.64	2.13	1.62	0.59
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.24						
2.0	0.81	0.31					
2.5	1.38	0.89	0.39				
3.0	1.95	1.46	0.97	0.47			
3.5	2.53	2.03	1.54	1.04	0.55		
4.0	3.10	2.60	2.11	1.62	1.12	0.63	
5.0	4.24	3.75	3.26	2.76	2.27	1.77	0.79
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.91	0.46					
2.5	1.49	1.03	0.57				
3.0	2.06	1.60	1.14	0.68			
3.5	2.63	2.17	1.71	1.26	0.80		
4.0	3.20	2.75	2.29	1.83	1.37	0.91	
5.0	4.35	3.89	3.43	2.97	2.52	2.06	1.14

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.86	0.39					
2.5	1.43	0.96	0.48				
3.0	2.01	1.53	1.06	0.58			
3.5	2.58	2.10	1.63	1.15	0.68		
4.0	3.15	2.68	2.20	1.72	1.25	0.77	
5.0	4.30	3.82	3.34	2.87	2.39	1.92	0.97
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.94	0.49					
2.5	1.52	1.07	0.62				
3.0	2.09	1.64	1.19	0.74			
3.5	2.66	2.21	1.76	1.31	0.87		
4.0	3.23	2.78	2.34	1.89	1.44	0.99	
5.0	4.38	3.93	3.48	3.03	2.58	2.13	1.24
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.49						
2.0	1.06	0.66					
2.5	1.64	1.23	0.82				
3.0	2.21	1.80	1.39	0.98			
3.5	2.78	2.37	1.96	1.55	1.15		
4.0	3.35	2.94	2.54	2.13	1.72	1.31	
5.0	4.50	4.09	3.68	3.27	2.86	2.45	1.64

Climate Zone 3: South Region, Houston Weather Data

Table 2-79: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.73	0.23					
2.5	1.28	0.79	0.29				
3.0	1.84	1.34	0.84	0.34			
3.5	2.40	1.90	1.40	0.90	0.40		
4.0	2.95	2.45	1.96	1.46	0.96	0.46	
5.0	4.07	3.57	3.07	2.57	2.07	1.57	0.57
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.23						
2.0	0.79	0.31					
2.5	1.34	0.86	0.38				
3.0	1.90	1.42	0.94	0.46			
3.5	2.46	1.98	1.50	1.02	0.54		
4.0	3.01	2.53	2.05	1.57	1.09	0.61	
5.0	4.12	3.64	3.16	2.68	2.20	1.73	0.77
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	0.89	0.44					
2.5	1.45	1.00	0.55				
3.0	2.00	1.56	1.11	0.66			
3.5	2.56	2.11	1.67	1.22	0.78		
4.0	3.11	2.67	2.22	1.78	1.33	0.89	
5.0	4.23	3.78	3.34	2.89	2.44	2.00	1.11

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.82	0.35					
2.5	1.38	0.91	0.44				
3.0	1.93	1.46	1.00	0.53			
3.5	2.49	2.02	1.55	1.08	0.62		
4.0	3.05	2.58	2.11	1.64	1.17	0.70	
5.0	4.16	3.69	3.22	2.75	2.28	1.82	0.88
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.90	0.46					
2.5	1.46	1.01	0.57				
3.0	2.01	1.57	1.13	0.69			
3.5	2.57	2.13	1.69	1.24	0.80		
4.0	3.13	2.68	2.24	1.80	1.36	0.92	
5.0	4.24	3.80	3.36	2.91	2.47	2.03	1.15
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.01	0.61					
2.5	1.57	1.17	0.76				
3.0	2.13	1.72	1.32	0.91			
3.5	2.68	2.28	1.87	1.47	1.07		
4.0	3.24	2.83	2.43	2.03	1.62	1.22	
5.0	4.35	3.95	3.54	3.14	2.73	2.33	1.52

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-80: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.13						
2.0	0.57	0.18					
2.5	1.00	0.61	0.22				
3.0	1.44	1.05	0.66	0.27			
3.5	1.87	1.48	1.09	0.70	0.31		
4.0	2.31	1.92	1.53	1.14	0.75	0.36	
5.0	3.18	2.79	2.40	2.01	1.62	1.23	0.45
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.18						
2.0	0.61	0.24					
2.5	1.05	0.67	0.30				
3.0	1.48	1.11	0.73	0.36			
3.5	1.92	1.54	1.17	0.79	0.42		
4.0	2.35	1.98	1.60	1.23	0.85	0.48	
5.0	3.22	2.85	2.47	2.10	1.72	1.35	0.60
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.69	0.35					
2.5	1.13	0.78	0.43				
3.0	1.56	1.22	0.87	0.52			
3.5	2.00	1.65	1.30	0.95	0.61		
4.0	2.43	2.09	1.74	1.39	1.04	0.69	
5.0	3.30	2.96	2.61	2.26	1.91	1.56	0.87

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.74	0.41					
2.5	1.18	0.85	0.52				
3.0	1.61	1.28	0.95	0.62			
3.5	2.05	1.72	1.39	1.05	0.72		
4.0	2.48	2.15	1.82	1.49	1.16	0.83	
5.0	3.35	3.02	2.69	2.36	2.03	1.70	1.03
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.36						
2.0	0.80	0.48					
2.5	1.23	0.92	0.61				
3.0	1.67	1.35	1.04	0.73			
3.5	2.10	1.79	1.48	1.16	0.85		
4.0	2.54	2.22	1.91	1.60	1.28	0.97	
5.0	3.41	3.09	2.78	2.47	2.15	1.84	1.21
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.48						
2.0	0.92	0.65					
2.5	1.35	1.08	0.81				
3.0	1.79	1.52	1.24	0.97			
3.5	2.22	1.95	1.68	1.40	1.13		
4.0	2.66	2.38	2.11	1.84	1.56	1.29	
5.0	3.53	3.25	2.98	2.71	2.43	2.16	1.61

Climate Zone 5: West Region El Paso Weather Data

Table 2-81: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.16						
2.0	0.69	0.22					
2.5	1.22	0.75	0.27				
3.0	1.75	1.28	0.80	0.33			
3.5	2.28	1.81	1.33	0.86	0.38		
4.0	2.81	2.34	1.86	1.39	0.91	0.44	
5.0	3.87	3.40	2.92	2.45	1.97	1.50	0.55
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.75	0.29					
2.5	1.28	0.82	0.36				
3.0	1.81	1.35	0.89	0.44			
3.5	2.34	1.88	1.42	0.97	0.51		
4.0	2.87	2.41	1.95	1.50	1.04	0.58	
5.0	3.93	3.47	3.01	2.56	2.10	1.64	0.73
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.85	0.42					
2.5	1.38	0.95	0.53				
3.0	1.90	1.48	1.06	0.63			
3.5	2.43	2.01	1.59	1.16	0.74		
4.0	2.96	2.54	2.12	1.69	1.27	0.84	
5.0	4.02	3.60	3.17	2.75	2.33	1.90	1.05

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.82	0.39					
2.5	1.35	0.92	0.49				
3.0	1.88	1.45	1.02	0.59			
3.5	2.41	1.98	1.55	1.12	0.68		
4.0	2.94	2.51	2.08	1.65	1.21	0.78	
5.0	4.00	3.57	3.14	2.70	2.27	1.84	0.98
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.89	0.49					
2.5	1.42	1.02	0.61				
3.0	1.95	1.55	1.14	0.73			
3.5	2.48	2.08	1.67	1.26	0.85		
4.0	3.01	2.61	2.20	1.79	1.38	0.97	
5.0	4.07	3.66	3.26	2.85	2.44	2.03	1.22
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.49						
2.0	1.02	0.66					
2.5	1.55	1.19	0.82				
3.0	2.08	1.72	1.35	0.98			
3.5	2.61	2.24	1.88	1.51	1.15		
4.0	3.14	2.77	2.41	2.04	1.68	1.31	
5.0	4.20	3.83	3.47	3.10	2.74	2.37	1.64

Early Retirement

Table 2-82 through Table 2-91 present the early retirement summer demand savings (kW) associated with central air conditioners installed in homes for the five Texas climate zones. These savings can be used with the replace-on-burnout energy savings in Table 2-77 through Table 2-81 to calculate summer demand savings. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows.

The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-82: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.82	0.33					
2.5	1.39	0.90	0.42				
3.0	1.95	1.47	0.98	0.50			
3.5	2.52	2.04	1.55	1.07	0.58		
4.0	3.09	2.60	2.12	1.64	1.15	0.67	
5.0	4.22	3.74	3.25	2.77	2.29	1.80	0.83
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.87	0.41					
2.5	1.44	0.98	0.51				
3.0	2.01	1.54	1.08	0.61			
3.5	2.58	2.11	1.64	1.18	0.71		
4.0	3.14	2.68	2.21	1.75	1.28	0.82	
5.0	4.28	3.81	3.35	2.88	2.42	1.95	1.02
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.41						
2.0	0.97	0.54					
2.5	1.54	1.11	0.68				
3.0	2.11	1.68	1.24	0.81			
3.5	2.68	2.24	1.81	1.38	0.95		
4.0	3.24	2.81	2.38	1.95	1.51	1.08	
5.0	4.38	3.95	3.51	3.08	2.65	2.22	1.35

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.92	0.46					
2.5	1.48	1.03	0.58				
3.0	2.05	1.60	1.15	0.70			
3.5	2.62	2.17	1.72	1.26	0.81		
4.0	3.19	2.73	2.28	1.83	1.38	0.93	
5.0	4.32	3.87	3.42	2.97	2.52	2.06	1.16
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	0.99	0.57					
2.5	1.56	1.13	0.71				
3.0	2.13	1.70	1.28	0.85			
3.5	2.70	2.27	1.84	1.42	0.99		
4.0	3.26	2.84	2.41	1.99	1.56	1.13	
5.0	4.40	3.97	3.55	3.12	2.69	2.27	1.42
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.11	0.72					
2.5	1.68	1.29	0.90				
3.0	2.24	1.86	1.47	1.08			
3.5	2.81	2.43	2.04	1.65	1.27		
4.0	3.38	2.99	2.61	2.22	1.83	1.45	
5.0	4.51	4.13	3.74	3.35	2.97	2.58	1.81

Table 2-83: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.67						
2.0	1.37	0.89					
2.5	2.08	1.59	1.11				
3.0	2.78	2.30	1.82	1.33			
3.5	3.49	3.00	2.52	2.04	1.55		
4.0	4.19	3.71	3.23	2.74	2.26	1.77	
5.0	5.61	5.12	4.64	4.15	3.67	3.19	2.22
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.72						
2.0	1.43	0.96					
2.5	2.13	1.67	1.20				
3.0	2.84	2.37	1.91	1.44			
3.5	3.54	3.08	2.61	2.15	1.68		
4.0	4.25	3.79	3.32	2.85	2.39	1.92	
5.0	5.66	5.20	4.73	4.27	3.80	3.34	2.40
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.82						
2.0	1.53	1.09					
2.5	2.23	1.80	1.37				
3.0	2.94	2.51	2.07	1.64			
3.5	3.64	3.21	2.78	2.35	1.92		
4.0	4.35	3.92	3.49	3.05	2.62	2.19	
5.0	5.76	5.33	4.90	4.47	4.03	3.60	2.74

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.76						
2.0	1.47	1.02					
2.5	2.18	1.72	1.27				
3.0	2.88	2.43	1.98	1.53			
3.5	3.59	3.14	2.69	2.23	1.78		
4.0	4.29	3.84	3.39	2.94	2.49	2.04	
5.0	5.71	5.25	4.80	4.35	3.90	3.45	2.55
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.84						
2.0	1.55	1.12					
2.5	2.25	1.83	1.40				
3.0	2.96	2.53	2.11	1.68			
3.5	3.66	3.24	2.81	2.39	1.96		
4.0	4.37	3.94	3.52	3.09	2.67	2.24	
5.0	5.78	5.36	4.93	4.50	4.08	3.65	2.80
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.96						
2.0	1.66	1.28					
2.5	2.37	1.98	1.60				
3.0	3.08	2.69	2.30	1.92			
3.5	3.78	3.39	3.01	2.62	2.23		
4.0	4.49	4.10	3.71	3.33	2.94	2.55	
5.0	5.90	5.51	5.13	4.74	4.35	3.97	3.19

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-84: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.87	0.35					
2.5	1.47	0.96	0.44				
3.0	2.07	1.56	1.04	0.53			
3.5	2.67	2.16	1.65	1.13	0.62		
4.0	3.27	2.76	2.25	1.73	1.22	0.71	
5.0	4.48	3.96	3.45	2.94	2.42	1.91	0.88
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.93	0.43					
2.5	1.53	1.03	0.54				
3.0	2.13	1.64	1.14	0.65			
3.5	2.73	2.24	1.74	1.25	0.76		
4.0	3.33	2.84	2.35	1.85	1.36	0.87	
5.0	4.54	4.04	3.55	3.06	2.56	2.07	1.08
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	1.03	0.57					
2.5	1.63	1.18	0.72				
3.0	2.24	1.78	1.32	0.86			
3.5	2.84	2.38	1.92	1.46	1.00		
4.0	3.44	2.98	2.52	2.06	1.61	1.15	
5.0	4.64	4.18	3.73	3.27	2.81	2.35	1.43

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.38						
2.0	0.98	0.50					
2.5	1.58	1.11	0.63				
3.0	2.18	1.71	1.23	0.76			
3.5	2.79	2.31	1.83	1.36	0.88		
4.0	3.39	2.91	2.44	1.96	1.48	1.01	
5.0	4.59	4.11	3.64	3.16	2.69	2.21	1.26
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.06	0.61					
2.5	1.66	1.21	0.77				
3.0	2.26	1.82	1.37	0.92			
3.5	2.87	2.42	1.97	1.52	1.07		
4.0	3.47	3.02	2.57	2.12	1.67	1.22	
5.0	4.67	4.22	3.77	3.33	2.88	2.43	1.53
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.58						
2.0	1.18	0.77					
2.5	1.78	1.37	0.97				
3.0	2.38	1.98	1.57	1.16			
3.5	2.99	2.58	2.17	1.76	1.35		
4.0	3.59	3.18	2.77	2.36	1.95	1.55	
5.0	4.79	4.38	3.97	3.57	3.16	2.75	1.93

Table 2-85: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.45	0.94					
2.5	2.20	1.69	1.18				
3.0	2.95	2.44	1.93	1.41			
3.5	3.70	3.19	2.67	2.16	1.65		
4.0	4.45	3.94	3.42	2.91	2.40	1.88	
5.0	5.95	5.43	4.92	4.41	3.89	3.38	2.35
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.77						
2.0	1.51	1.02					
2.5	2.26	1.77	1.28				
3.0	3.01	2.52	2.02	1.53			
3.5	3.76	3.27	2.77	2.28	1.79		
4.0	4.51	4.01	3.52	3.03	2.53	2.04	
5.0	6.01	5.51	5.02	4.52	4.03	3.54	2.55
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.87						
2.0	1.62	1.16					
2.5	2.37	1.91	1.45				
3.0	3.12	2.66	2.20	1.74			
3.5	3.87	3.41	2.95	2.49	2.03		
4.0	4.61	4.16	3.70	3.24	2.78	2.32	
5.0	6.11	5.65	5.19	4.74	4.28	3.82	2.90

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.82						
2.0	1.57	1.09					
2.5	2.32	1.84	1.36				
3.0	3.06	2.59	2.11	1.64			
3.5	3.81	3.34	2.86	2.39	1.91		
4.0	4.56	4.09	3.61	3.13	2.66	2.18	
5.0	6.06	5.58	5.11	4.63	4.16	3.68	2.73
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.90						
2.0	1.65	1.20					
2.5	2.40	1.95	1.50				
3.0	3.15	2.70	2.25	1.80			
3.5	3.89	3.45	3.00	2.55	2.10		
4.0	4.64	4.19	3.75	3.30	2.85	2.40	
5.0	6.14	5.69	5.24	4.79	4.35	3.90	3.00
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.02						
2.0	1.77	1.36					
2.5	2.52	2.11	1.70				
3.0	3.27	2.86	2.45	2.04			
3.5	4.01	3.61	3.20	2.79	2.38		
4.0	4.76	4.35	3.95	3.54	3.13	2.72	
5.0	6.26	5.85	5.44	5.03	4.63	4.22	3.40

Climate Zone 3: South Region, Houston Weather Data

Table 2-86: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.84	0.34					
2.5	1.43	0.93	0.43				
3.0	2.01	1.51	1.01	0.52			
3.5	2.60	2.10	1.60	1.10	0.60		
4.0	3.18	2.68	2.18	1.69	1.19	0.69	
5.0	4.35	3.85	3.35	2.86	2.36	1.86	0.86
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.90	0.42					
2.5	1.49	1.01	0.53				
3.0	2.07	1.59	1.11	0.63			
3.5	2.66	2.18	1.70	1.22	0.74		
4.0	3.24	2.76	2.28	1.80	1.32	0.84	
5.0	4.41	3.93	3.45	2.97	2.49	2.01	1.05
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.42						
2.0	1.00	0.56					
2.5	1.59	1.14	0.70				
3.0	2.17	1.73	1.28	0.84			
3.5	2.76	2.31	1.87	1.42	0.98		
4.0	3.34	2.90	2.45	2.01	1.56	1.12	
5.0	4.51	4.07	3.62	3.18	2.73	2.29	1.39

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.93	0.47					
2.5	1.52	1.05	0.58				
3.0	2.10	1.64	1.17	0.70			
3.5	2.69	2.22	1.75	1.28	0.82		
4.0	3.27	2.81	2.34	1.87	1.40	0.93	
5.0	4.44	3.98	3.51	3.04	2.57	2.10	1.17
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	1.01	0.57					
2.5	1.60	1.16	0.72				
3.0	2.18	1.74	1.30	0.86			
3.5	2.77	2.33	1.89	1.44	1.00		
4.0	3.35	2.91	2.47	2.03	1.59	1.15	
5.0	4.52	4.08	3.64	3.20	2.76	2.32	1.43
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.13	0.72					
2.5	1.71	1.31	0.90				
3.0	2.30	1.89	1.49	1.08			
3.5	2.88	2.48	2.07	1.67	1.27		
4.0	3.47	3.06	2.66	2.25	1.85	1.45	
5.0	4.64	4.23	3.83	3.42	3.02	2.62	1.81

Table 2-87: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.69						
2.0	1.41	0.91					
2.5	2.14	1.64	1.14				
3.0	2.87	2.37	1.87	1.37			
3.5	3.60	3.10	2.60	2.10	1.60		
4.0	4.32	3.83	3.33	2.83	2.33	1.83	
5.0	5.78	5.28	4.78	4.28	3.78	3.29	2.29
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.74						
2.0	1.47	0.99					
2.5	2.20	1.72	1.24				
3.0	2.93	2.45	1.97	1.49			
3.5	3.65	3.17	2.69	2.22	1.74		
4.0	4.38	3.90	3.42	2.94	2.46	1.98	
5.0	5.84	5.36	4.88	4.40	3.92	3.44	2.48
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.85						
2.0	1.57	1.13					
2.5	2.30	1.86	1.41				
3.0	3.03	2.58	2.14	1.69			
3.5	3.76	3.31	2.87	2.42	1.98		
4.0	4.49	4.04	3.59	3.15	2.70	2.26	
5.0	5.94	5.50	5.05	4.60	4.16	3.71	2.82

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.78						
2.0	1.51	1.04					
2.5	2.23	1.76	1.30				
3.0	2.96	2.49	2.02	1.56			
3.5	3.69	3.22	2.75	2.28	1.81		
4.0	4.42	3.95	3.48	3.01	2.54	2.07	
5.0	5.87	5.40	4.93	4.47	4.00	3.53	2.59
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.86						
2.0	1.59	1.14					
2.5	2.31	1.87	1.43				
3.0	3.04	2.60	2.16	1.72			
3.5	3.77	3.33	2.89	2.44	2.00		
4.0	4.50	4.05	3.61	3.17	2.73	2.29	
5.0	5.95	5.51	5.07	4.63	4.19	3.74	2.86
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.97						
2.0	1.70	1.29					
2.5	2.43	2.02	1.62				
3.0	3.15	2.75	2.35	1.94			
3.5	3.88	3.48	3.07	2.67	2.26		
4.0	4.61	4.21	3.80	3.40	2.99	2.59	
5.0	6.06	5.66	5.26	4.85	4.45	4.04	3.24

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-88: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.66	0.27					
2.5	1.12	0.73	0.34				
3.0	1.57	1.18	0.79	0.40			
3.5	2.03	1.64	1.25	0.86	0.47		
4.0	2.49	2.10	1.71	1.32	0.93	0.54	
5.0	3.40	3.01	2.62	2.23	1.84	1.45	0.67
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.70	0.33					
2.5	1.16	0.79	0.41				
3.0	1.62	1.24	0.87	0.49			
3.5	2.08	1.70	1.33	0.95	0.58		
4.0	2.53	2.16	1.78	1.41	1.03	0.66	
5.0	3.45	3.07	2.70	2.32	1.95	1.57	0.82
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	0.78	0.44					
2.5	1.24	0.89	0.54				
3.0	1.70	1.35	1.00	0.65			
3.5	2.16	1.81	1.46	1.11	0.76		
4.0	2.61	2.26	1.92	1.57	1.22	0.87	
5.0	3.53	3.18	2.83	2.48	2.13	1.79	1.09

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.38						
2.0	0.83	0.50					
2.5	1.29	0.96	0.63				
3.0	1.75	1.42	1.09	0.75			
3.5	2.21	1.87	1.54	1.21	0.88		
4.0	2.66	2.33	2.00	1.67	1.34	1.01	
5.0	3.58	3.25	2.91	2.58	2.25	1.92	1.26
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	0.89	0.57					
2.5	1.34	1.03	0.72				
3.0	1.80	1.49	1.17	0.86			
3.5	2.26	1.95	1.63	1.32	1.00		
4.0	2.72	2.40	2.09	1.78	1.46	1.15	
5.0	3.63	3.32	3.00	2.69	2.38	2.06	1.44
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.55						
2.0	1.01	0.74					
2.5	1.47	1.19	0.92				
3.0	1.92	1.65	1.38	1.10			
3.5	2.38	2.11	1.83	1.56	1.29		
4.0	2.84	2.56	2.29	2.02	1.74	1.47	
5.0	3.75	3.48	3.20	2.93	2.66	2.38	1.84

Table 2-89: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.10	0.71					
2.5	1.67	1.28	0.89				
3.0	2.24	1.85	1.46	1.07			
3.5	2.81	2.42	2.03	1.64	1.25		
4.0	3.38	2.99	2.60	2.21	1.82	1.43	
5.0	4.52	4.13	3.74	3.35	2.96	2.57	1.79
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.58						
2.0	1.15	0.77					
2.5	1.72	1.34	0.97				
3.0	2.29	1.91	1.54	1.16			
3.5	2.86	2.48	2.11	1.73	1.36		
4.0	3.42	3.05	2.67	2.30	1.92	1.55	
5.0	4.56	4.19	3.81	3.44	3.06	2.69	1.94
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.66						
2.0	1.23	0.88					
2.5	1.80	1.45	1.10				
3.0	2.37	2.02	1.67	1.32			
3.5	2.94	2.59	2.24	1.89	1.54		
4.0	3.50	3.16	2.81	2.46	2.11	1.76	
5.0	4.64	4.29	3.95	3.60	3.25	2.90	2.21

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.28	0.95					
2.5	1.85	1.52	1.19				
3.0	2.42	2.09	1.75	1.42			
3.5	2.99	2.66	2.32	1.99	1.66		
4.0	3.56	3.22	2.89	2.56	2.23	1.90	
5.0	4.69	4.36	4.03	3.70	3.37	3.04	2.37
18.0-18.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.77						
2.0	1.33	1.02					
2.5	1.90	1.59	1.28				
3.0	2.47	2.16	1.84	1.53			
3.5	3.04	2.73	2.41	2.10	1.79		
4.0	3.61	3.29	2.98	2.67	2.35	2.04	
5.0	4.75	4.43	4.12	3.81	3.49	3.18	2.55
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.89						
2.0	1.45	1.18					
2.5	2.02	1.75	1.48				
3.0	2.59	2.32	2.05	1.77			
3.5	3.16	2.89	2.61	2.34	2.07		
4.0	3.73	3.46	3.18	2.91	2.64	2.36	
5.0	4.87	4.59	4.32	4.05	3.77	3.50	2.95

Climate Zone 5: West Region El Paso Weather Data

Table 2-90: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.80	0.33					
2.5	1.36	0.88	0.41				
3.0	1.92	1.44	0.97	0.49			
3.5	2.47	2.00	1.52	1.05	0.57		
4.0	3.03	2.55	2.08	1.60	1.13	0.65	
5.0	4.14	3.67	3.19	2.72	2.24	1.77	0.82
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.30						
2.0	0.86	0.40					
2.5	1.41	0.96	0.50				
3.0	1.97	1.51	1.06	0.60			
3.5	2.53	2.07	1.61	1.16	0.70		
4.0	3.08	2.63	2.17	1.71	1.26	0.80	
5.0	4.20	3.74	3.28	2.83	2.37	1.91	1.00
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.40						
2.0	0.95	0.53					
2.5	1.51	1.09	0.66				
3.0	2.07	1.64	1.22	0.80			
3.5	2.63	2.20	1.78	1.35	0.93		
4.0	3.18	2.76	2.33	1.91	1.49	1.06	
5.0	4.30	3.87	3.45	3.02	2.60	2.18	1.33

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.93	0.50					
2.5	1.49	1.06	0.62				
3.0	2.05	1.61	1.18	0.75			
3.5	2.60	2.17	1.74	1.31	0.87		
4.0	3.16	2.73	2.30	1.86	1.43	1.00	
5.0	4.27	3.84	3.41	2.98	2.55	2.11	1.25
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.45						
2.0	1.00	0.60					
2.5	1.56	1.15	0.75				
3.0	2.12	1.71	1.30	0.89			
3.5	2.67	2.27	1.86	1.45	1.04		
4.0	3.23	2.82	2.42	2.01	1.60	1.19	
5.0	4.34	3.94	3.53	3.12	2.71	2.31	1.49
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.57						
2.0	1.13	0.77					
2.5	1.69	1.32	0.96				
3.0	2.24	1.88	1.51	1.15			
3.5	2.80	2.44	2.07	1.70	1.34		
4.0	3.36	2.99	2.63	2.26	1.90	1.53	
5.0	4.47	4.11	3.74	3.37	3.01	2.64	1.91

Table 2-91: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.65						
2.0	1.35	0.87					
2.5	2.04	1.56	1.09				
3.0	2.73	2.26	1.78	1.31			
3.5	3.42	2.95	2.47	2.00	1.52		
4.0	4.12	3.64	3.17	2.69	2.22	1.74	
5.0	5.50	5.03	4.55	4.08	3.60	3.13	2.18
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.40	0.94					
2.5	2.09	1.64	1.18				
3.0	2.79	2.33	1.87	1.42			
3.5	3.48	3.02	2.56	2.11	1.65		
4.0	4.17	3.71	3.26	2.80	2.34	1.89	
5.0	5.56	5.10	4.64	4.19	3.73	3.27	2.36
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.81						
2.0	1.50	1.07					
2.5	2.19	1.77	1.34				
3.0	2.88	2.46	2.04	1.61			
3.5	3.58	3.15	2.73	2.30	1.88		
4.0	4.27	3.84	3.42	3.00	2.57	2.15	
5.0	5.65	5.23	4.81	4.38	3.96	3.53	2.69

17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.78						
2.0	1.48	1.04					
2.5	2.17	1.74	1.30				
3.0	2.86	2.43	2.00	1.56			
3.5	3.55	3.12	2.69	2.26	1.83		
4.0	4.25	3.81	3.38	2.95	2.52	2.09	
5.0	5.63	5.20	4.77	4.34	3.90	3.47	2.61
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.85						
2.0	1.55	1.14					
2.5	2.24	1.83	1.42				
3.0	2.93	2.52	2.12	1.71			
3.5	3.62	3.22	2.81	2.40	1.99		
4.0	4.32	3.91	3.50	3.09	2.69	2.28	
5.0	5.70	5.30	4.89	4.48	4.07	3.66	2.85
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.98						
2.0	1.67	1.31					
2.5	2.37	2.00	1.64				
3.0	3.06	2.69	2.33	1.96			
3.5	3.75	3.39	3.02	2.66	2.29		
4.0	4.44	4.08	3.71	3.35	2.98	2.62	
5.0	5.83	5.46	5.10	4.73	4.37	4.00	3.27

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a central air conditioning unit is 18 years based on the current DOE Final Rule standards for central air conditioners.¹⁴¹

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Decision/action type (early retirement, replace-on-burnout, new construction)
- Cooling capacity of the installed unit (tons)
- Seasonal Energy Efficiency Ratio (SEER) and Energy Efficiency Ratio (EER) of the installed unit
- Age of replaced unit (Early Retirement only)
- Recommended: retired unit model number, serial number, and manufacturer (Early Retirement or Downsizing)
- Recommended: photograph of retired unit nameplate (Early Retirement or Downsizing)
- If photograph of retired unit nameplate is unavailable or not legible, provide estimated square footage of conditioned area served by the retired unit (Downsizing only)
- Recommended: customer responses to survey questionnaire for early retirement eligibility determination (Early Retirement only)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

¹⁴¹ Final Rule: Standards, Federal Register, 76 FR 37408 (June 27, 2011) and associated Technical Support Document. Accessed 10/21/2014.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2011-BT-STD-0011-0012>.

Relevant Standards and Reference Sources

- ASHRAE 90.1-1999 (Residential Buildings)
- ACCA Manual J Residential Load Calculation (8th Edition)¹⁴²

Document Revision History

Table 2-92: Residential Central Air Conditioner Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Low-income and Hard-to-Reach Market Transformation section merged with main measure as “Early Retirement” option. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. Reversion to TRM v1.0 savings tables to reflect deferred enforcement of new regional standards. A court-ordered settlement allows SEER 13 split-system units to be sold without penalty until July 1, 2016.
v3.0	4/10/2015	TRM v3.0 update. Savings values incorporated corresponding with federal and regional standards effective January 1, 2015. Early retirement savings may be claimed through any appropriately designed program in accordance with EM&V team’s memo, “Considerations for early replacement of residential equipment.” Remaining useful lifetimes updated.
v3.1	11/05/2015	TRM v3.1 update. Removal of legacy language around baseline. Extension of Early Retirement savings tables to higher SEER values.
v4.0	10/10/2016	TRM v4.0 update. Added RUL value for units with an age of one year. Added a default RUL value for when the age of the unit is unknown. Eliminated the eligibility requirement of the existing unit to have a minimum age of five years. Updated savings for 15.0-15.9 SEER range.
v5.0	10/2017	TRM v5.0 update. Updated energy savings to use TMY3 temperature bin hours. Updated demand savings for compliance with current peak definition. Added 12.44 SEER baseline savings tables previously referencing earlier version of TRM. Added savings for system downsizing.

¹⁴² <https://www.acca.org/store/product.php?pid=172>.

2.2.4 Ground Source Heat Pumps Measure Overview

TRM Measure ID: R-HV-GH

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values and Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure requires the installation of a ground-source heat pump (GSHP) meeting the minimum requirements of ENERGY STAR® Tier 3 geothermal heat pump key product criteria. The deemed savings are dependent upon the energy efficiency rating (EER) and coefficient of performance (COP) of the installed equipment. Savings calculations are presented for systems both with and without desuperheaters.

Eligibility Criteria

The deemed savings apply to units with a capacity of $\leq 65,000$ Btu/hour.

Energy savings for desuperheaters only apply if the desuperheater is attached to an electric storage water heater. The electric storage water heating cannot replace a gas water heater in a retrofit installation.

Baseline Condition

The baseline unit is assumed to be an air-source heat pump (ASHP) for new construction, and either an ASHP or an electric resistance furnace for replace-on-burnout projects. New construction baseline efficiency values for ASHPs are compliant with the current federal minimum standard,¹⁴³ effective January 1, 2015.

¹⁴³ DOE minimum efficiency standard for residential air conditioners/heat pumps.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75.

For replace-on-burnout (ROB) projects, the cooling baseline is reduced to 13.08 SEER. This value incorporates an adjustment to the baseline SEER value to reflect the percentage of current replacements that do not include the installation of an AHRI-matched system.¹⁴⁴ The heating baseline for replace-on-burnout projects is dependent on the heating type of the baseline equipment.

Table 2-93: Ground Source Heat Pump Baseline Efficiencies

Project Type	Cooling Mode ¹⁴⁵	Heating Mode ¹⁴⁶
New Construction	11.8 EER (14 SEER)	2.4 COP (8.2 HSPF)
ROB—Air Source Heat Pump Baseline	11.4 EER (13.08 SEER)	2.4 COP (8.2 HSPF)
ROB—Electric Resistance Baseline		1 COP (3.41 HSPF)

High-Efficiency Condition

Table 2-94 displays the ENERGY STAR® requirements for eligible Tier 3 geothermal heat pumps as of January 1, 2012. Energy efficiency service providers are expected to comply with the latest ENERGY STAR® requirements.

Table 2-94: Ground Source Heat Pump ENERGY STAR® Tier 3 Requirements

Product Type	Cooling Mode (EER)	Heating Mode (COP)
Closed Loop Water-to-Air	17.1	3.6
Open Loop Water-to-Air	21.1	4.1
Closed Loop Water-to-Water	16.1	3.1
Open Loop Water-to-Water	20.1	3.5
Direct Geoexchange (DGX)	16.0	3.6

The specifications in the charts above apply to single-stage models. Multi-stage models may be qualified based on:¹⁴⁷

¹⁴⁴ Frontier Associates on behalf of the Electric Utility Marketing Managers of Texas (EUMMOT). "Petition to revise Existing Commission-Approved Deemed Savings Values for Central Air Conditioning and Heat Pump Systems: Docket No. 36780." Public Utility Commission of Texas. Approved August 27, 2009. <http://interchange.puc.state.tx.us/WebApp/Interchange/application/dbapps/filings/pgSearch.asp>. Adapted for new 14 SEER baseline.

¹⁴⁵ Code specified EER value converted to SEER using $EER = -0.02 \times SEER^2 + 1.12 \times SEER$. National Renewable Energy Laboratory (NREL). "Building America House Simulation Protocols." U.S. Department of Energy. Revised October 2010. <http://www.nrel.gov/docs/fy11osti/49246.pdf>.

¹⁴⁶ Code specified HSPF value converted to COP using $COP = HSPF \times 1,055 \text{ J/Btu} \div 3,600 \text{ J/W-h}$.

¹⁴⁷ Geothermal Heat Pumps Key Product Criteria, https://www.energystar.gov/index.cfm?c=geo_heat.pr_crit_geo_heat_pumps. Accessed February 2014.

- $EER = (\text{highest rated capacity } EER + \text{lowest rated capacity } EER) \div 2$

Equation 56

- $COP = (\text{highest rated capacity } COP + \text{lowest rated capacity } COP) \div 2$

Equation 57

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Peak demand and annual energy savings for GSHP systems should be calculated as shown below. Where a desuperheater is also installed, please see the Deemed Energy Savings Tables section for additional energy savings, and the Deemed Summer Demand Savings Tables for additional demand savings.

Energy and demand savings for desuperheaters were adapted from a 2001 study conducted by Oak Ridge National Laboratory (ORNL) on ground source heat pumps in Texas.¹⁴⁸ Desuperheater savings were calculated for each climate zone by taking the difference in savings between GSHPs with and without desuperheaters, and averaging the savings between low and high efficiency units. Savings for GSHP systems with desuperheaters should be calculated using the algorithms below with an additional energy credit based on the system capacity and efficiency.

The ORNL study draws from a 1998 analysis based on a study conducted at the Fort Polk Joint Readiness Training Center in Leesville, Louisiana. The Fort Polk study used calibrated simulations of 200 multifamily residences in the complex to estimate energy savings attributable to replacement of air source heat pumps with ground source heat pumps. These estimates were found to be within 5 percent of actual post-retrofit savings. Building models were developed using TRNSYS.¹⁴⁹

Using the Fort Polk models, the ORNL study assumed a baseline of a 1.5 ton, 10 SEER air source heat pump. Simulations of low-, medium-, and high-efficiency ground source heat pumps with and without desuperheaters were compared against the baseline unit. The models were run using TMY-2 weather profiles for climate zones 1-4. Energy and demand differences between the pre- and post-retrofit models were used to estimate average savings per ton of cooling capacity.

In the 1998 analysis, low-efficiency GSHPs were assumed to be units with an EER of 12.4 and capacity of 19 kBtuh, while medium-efficiency units had an EER of 16.8 and capacity of 21 kBtuh. High-efficiency units had an EER of 18.3, with a capacity of 22 kBtuh.

These models were used to derive the energy and demand savings associated with installation of a desuperheater along with a ground source heat pump, as shown in Table 2-97 and Table 2-98, respectively.

¹⁴⁸ Shonder, J. A., Hughes, P., and Thornton, J. Development of Deemed Energy and Demand Savings for Residential Ground Source Heat Pump Retrofits in the State of Texas. Transactions-American Society of Heating, Refrigerating, and Air Conditioning Engineers. 108, no. 1: 953-961, 2001. <http://web.ornl.gov/~webworks/cppr/y2001/pres/112677.pdf>.

¹⁴⁹ Klein, S. A. TRNSYS Manual: A Transient Simulation Program. Solar Engineering Laboratory, University of Wisconsin-Madison, Version 14.2 for Windows, September 1996.

Energy Savings Algorithms

$$kWh_{Savings} = kWh_{Savings,Summer} + kWh_{Savings,Winter} + kWh_{desuperheater}$$

Equation 58

$$kWh_{Savings,C} = CAP_C \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times EFLH_C \times \left(\frac{1}{SEER_{Base}} - \frac{1}{EER_{GSHP}} \right)$$

Equation 59

$$kWh_{Savings,H} = CAP_H \times \frac{1 \text{ kWh}}{1,000 \text{ Wh}} \times EFLH_H \times \left(\frac{1}{HSPF_{Base}} - \frac{1}{3.412 \times COP_{GSHP}} \right)$$

Equation 60

Where:

$kWh_{desuperheater}$ = Energy savings (kWh) associated with installation of a desuperheater (see Table 2-97). These savings should only be added if a desuperheater is installed.

CAP_C = Rated equipment cooling capacity of the installed GSHP (Btu/hr)

CAP_H = Rated equipment heating capacity of the installed GSHP (Btu/hr)

$EFLH_C$ = Equivalent full load hours for cooling)

$EFLH_H$ = Equivalent full load hours for heating (Table 2-95)

$SEER_{Base}$ = Seasonal Energy Efficiency Ratio of the baseline cooling equipment (Table 2-93)

EER_{GSHP} = Energy Efficiency Ratio of the installed GSHP

$HSPF_{Base}$ = Heating Seasonal Performance Factor of the baseline heating equipment (Table 2-93)

COP_{GSHP} = Coefficient of Performance of the installed GSHP

Table 2-95: Equivalent full load cooling/heating hours¹⁵⁰

Climate Zone	EFLH _C	EFLH _H
Climate Zone 1: Panhandle	1,142	1,880
Climate Zone 2: North	1,926	1,343
Climate Zone 3: South	2,209	1,127
Climate Zone 4: Valley	2,958	776
Climate Zone 5: West	1,524	1,559

Demand Savings Algorithms

$$kW_{Savings,C} = CAP_C \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times \left(\frac{1}{EER_{Base}} - \frac{1}{EER_{GSHP}} \right) \times CF_C + kW_{desuperheater}$$

Equation 61

$$kW_{Savings,H} = CAP_H \times \frac{1 \text{ kWh}}{3,412 \text{ Btu}} \times \left(\frac{1}{COP_{Base}} - \frac{1}{COP_{GSHP}} \right) \times CF_H$$

Equation 62

Where:

- CAP_C = Rated equipment cooling capacity of the installed GSHP (Btu/hr)
- CAP_H = Rated equipment heating capacity of the installed GSHP (Btu/hr)
- EER_{Base} = Energy Efficiency Ratio of the baseline cooling equipment (Table 2-93)
- EER_{GSHP} = Energy Efficiency Ratio of the installed GSHP
- COP_{Base} = Coefficient of Performance of the baseline heating equipment (Table 2-93)
- COP_{GSHP} = Coefficient of Performance of the installed GSHP
- CF_C = Coincidence Factor = (Table 2-4)
- CF_H = Coincidence Factor = (Table 2-4)
- $kW_{desuperheater}$ = Summer demand savings (kW) associated with installation of a desuperheater (see Table 2-98). These savings should only be added if a desuperheater is installed.

¹⁵⁰ ENERGY STAR® Central AC/HP Savings Calculator. http://www.energystar.gov/certified-products/detail/heat_pumps_air_source.

Table 2-96: Ground Source Heat Pumps—Coincidence Factors for GSHPs¹⁵¹

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.634	0.677	0.626	0.583	0.725
Winter	0.549	0.478	0.515	0.453	0.437

Deemed Energy Savings Tables

Table 2-97: Energy Savings for Desuperheaters

Climate Zone	kWh/ton
Climate Zone 1: Panhandle	612
Climate Zone 2: North	791
Climate Zone 3: South	802
Climate Zone 4: Valley	847
Climate Zone 5: West	791

Deemed Summer Demand Savings Tables

Table 2-98: Summer Peak Demand Savings for Desuperheaters

Climate Zone	kW/ton
Climate Zone 1: Panhandle	0.440
Climate Zone 2: North	0.405
Climate Zone 3: South	0.405
Climate Zone 4: Valley	0.410
Climate Zone 5: West	0.405

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

¹⁵¹ See Volume 1, Appendix B.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a high-efficiency ground source heat pump unit is 20 years.

This value is consistent with the EUL reported in the Department of Energy GSHP guide.¹⁵²

Program Tracking Data and Evaluation Requirements

It is required that the following list of primary inputs and contextual data be specified and tracked by the program database to inform the evaluation and apply the savings properly:

- Climate zone
- Decision/action type (new construction, replace-on-burnout)
- Replaced unit type (heat pump, electric resistance)
- Cooling and heating capacity (Btu/hr)
- Energy Efficiency Ratio (EER) of the unit installed
- Coefficient of Performance (COP) of the unit installed
- Whether a desuperheater was also installed or present

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- ISO/AHRI 13256-1
- Shonder, J. A., Hughes, P., and Thornton, J. Development of Deemed Energy and Demand Savings for Residential Ground Source Heat Pump Retrofits in the State of Texas. Transactions-American Society of Heating, Refrigerating, and Air Conditioning Engineers. 108, no. 1: 953-961, 2001.
<http://web.ornl.gov/~webworks/cpapr/y2001/pres/112677.pdf>
- The applicable version of ENERGY STAR®'s specifications and requirements addressing residential ground source heat pumps.

¹⁵² Department of Energy. "Guide to Geothermal Heat Pumps. February 2011.
http://www.energy.gov/sites/prod/files/guide_to_geothermal_heat_pumps.pdf.

Document Revision History

Table 2-99: Ground Source Heat Pump Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Updated by Frontier Associates, March 2014, based on new federal standards and alternative methodology.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. No revision.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. Updated peak coincidence factors for compliance with current Texas peak definition. Single coincidence factor replaced with individual factors for each climate zone.

2.2.5 Central Heat Pumps Measure Overview

TRM Measure ID: R-HV-HP

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction, Early Retirement

Program Delivery Type(s): Prescriptive, Direct Install (Early Retirement)

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Engineering Estimates.

Measure Description

Residential replacement of existing heating and cooling equipment with a new central air-source heat pump in an existing building, or the installation of a new central heat pump in a new residential construction. Downsized systems that are right sized per a heat load calculation are also eligible. A new central heat pump includes an entire packaged unit, or a split system consisting of an indoor unit with a matching remote condensing unit.

All measure installation standards and baseline data from the central air conditioner measure shall apply to the heat pump measure.

Eligibility Criteria

Newly installed units must have a cooling capacity of less than 65,000 Btu/hour (5.4 tons) to be eligible for these deemed savings. Gas furnaces are not eligible to be awarded savings for replacement through this measure.

Equipment shall be properly sized to dwelling based on ASHRAE or ACCA Manual J standards. Manufacturer data sheets on installed heat pump equipment or AHRI reference numbers must be provided.

Utilities should refer to the January 2015 memo, "Considerations for early replacement of residential equipment,"¹⁵³ when designing programs that permit savings to be claimed for early

¹⁵³ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. "Considerations for early replacement of residential equipment." Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to Texas investor-owned utilities through the EM&V team's SharePoint.

retirement. In order to receive early retirement savings, the unit to be replaced must be functioning at the time of removal with a maximum age of 20 years.

New construction projects are not eligible to receive savings for system downsizing. For system upsizing, savings should be claimed against the new construction baseline.

Baseline Condition

New Construction, Replace-on-Burnout, or Early Retirement of an Air-Source Heat Pump

New construction baseline efficiency values for heat pumps are compliant with the current federal minimum standard,¹⁵⁴ effective January 1, 2015. The baseline is assumed to be a new heat pump system with an AHRI-listed SEER rating of 14.0. This baseline is also applicable to heat pumps installations replacing air conditioners with gas heat.

For replace-on-burnout (ROB) projects, the cooling baseline is reduced to 13.08 SEER. This value incorporates an adjustment to the baseline SEER value to reflect the percentage of current replacements that do not include the installation of an AHRI-matched system.¹⁵⁵

For early retirement (ER) projects, the cooling baseline is reduced to 10 SEER for systems installed before January 23, 2006. For systems installed on or after January 23, 2006, the ER baseline increases to 12.44 SEER.

For ROB projects, heating baseline efficiency values for heat pumps are compliant with the current federal minimum standard, effective January 1, 2015. These standards specify an HSPF of 8.2 for split systems, or 8.0 for packaged systems. This baseline reflects updates to federal standards that take effect January 1, 2015, as defined in the Department of Energy (DOE) energy efficiency standards (10 CFR Part 430).¹⁵⁶ For ER projects where the existing system was installed on or after January 23, 2006, the heating baseline efficiency is assumed to be an HSPF of 7.7 based on the federal minimum standard in effect from January 23, 2006 through December 31, 2014.¹⁵⁷ For ER projects where the existing system was installed before January 23, 2006, the heating baseline efficiency is reduced to 6.8 HSPF based on the federal minimum standard in effect prior to January 23, 2006.

¹⁵⁴ DOE minimum efficiency standard for residential air conditioners/heat pumps.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75.

¹⁵⁵ Frontier Associates on behalf of the Electric Utility Marketing Managers of Texas (EUMMOT). "Petition to revise Existing Commission-Approved Deemed Savings Values for Central Air Conditioning and Heat Pump Systems: Docket No. 36780." Public Utility Commission of Texas. Approved August 27, 2009.

<http://interchange.puc.state.tx.us/WebApp/Interchange/application/dbapps/filings/pgSearch.asp>.

Adapted for new 14 SEER baseline.

¹⁵⁶ *10 CFR Part 430.32(c)2. Energy Conservation Program: Energy Conservation Standards for Residential Water Heaters, Direct Heating Equipment, and Pool Heaters; Final Rule.* Online.

Available: <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>. Accessed February 2014.

¹⁵⁷ Ibid.

Replace-on-Burnout or Early Retirement of an Electric Resistance Furnace

By the nature of the technology, all electric resistance furnaces have the same efficiency with HSPF = 3.41.¹⁵⁸ Projects in which an electric resistance furnace is replaced, either in replace-on-burnout or early retirement scenarios, use this baseline for heating-side savings.

For ROB projects, cooling savings are the same as for new construction and ROB of an air-source heat pump. For early retirement (ER) projects, the cooling baseline is reduced to 10 SEER for systems installed before January 23, 2006. For systems installed on or after January 23, 2006, the ER baseline increases to 12.44 SEER.

Table 2-100: Central Heat Pump Baseline Efficiencies

Project Type	Cooling Mode	Heating Mode
New Construction	14 SEER	8.2 HSPF
Replace-on-Burnout, Heat Pump	13.08 SEER	8.2 HSPF
Replace-on-Burnout, Electric Resistance Furnace		3.41 HSPF
Early Retirement, Heat Pump (as of 1/23/2006)	12.44 SEER	7.7 HSPF
Early Retirement, Electric Resistance Furnace (as of 1/23/2006)		3.41 HSPF
Early Retirement, Heat Pump (before 1/23/2006)	10 SEER	6.8 HSPF
Early Retirement, Electric Resistance Furnace (before 1/23/2006)		3.41 HSPF

High-Efficiency Condition

Table 2-101 displays the Consortium for Energy Efficiency (CEE) requirements for eligible Tier 1 heat pumps as of January 1, 2009. Energy efficiency service providers are expected to at least comply with the latest CEE Tier 1 requirements.

Table 2-101: Central Heat Pump CEE Tier 1 Requirements

SEER	EER	HSPF
14.5	12.0	8.5

¹⁵⁸ COP = HSPF × 1,055 J/BTU / 3,600 J/W-hr. For Electric Resistance, heating efficiency is 1 COP. Therefore, HSPF = 1 × 3,600 / 1,055 = 3.41.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Replace-on-Burnout or New Construction

Energy, summer demand, and winter demand savings were estimated using heat pump performance curves developed by the National Renewable Energy Laboratory¹⁵⁹ for typical units in each of the following SEER ranges:

- Baseline units
- 14.5—14.9
- 15.0—15.9
- 16.0—16.9
- 17.0—17.9
- 18.0—20.9
- 21.0 and above.

14.5—16.9 SEER units were assumed to be single stage. 17.0 and above SEER units were assumed to be multi-stage cooling units.

These performance curves provide the capacity and efficiency of the heat pump operating in cooling mode across a wide range of outside air temperatures. Unit loading was estimated as a function of outside air temperature, and hours of cooling mode operation under different loadings were estimated using bin weather data for each weather zone. In heating mode, predicted HVAC operation was limited to meeting 77 percent of load, using a factor applied in Manual J to correlate design load hours to equivalent full load hours under actual operating conditions. This approach takes into account the observation that heating systems are not always operated even when outdoor conditions indicate they should.

Summer and winter demand savings were estimated according to the expected unit performance under design conditions. For all weather zones, it is assumed that typical HVAC systems are sized to 115 percent of their design cooling load (oversized by 15 percent). Heating mode capacity was related to rated cooling capacity using the rated capacity in cooling and heating mode of the residential market heat pump products of four major manufacturers according to data exported from AHRI. Data were exported from the AHRI directory and the average ratio for each equipment size (1 ton, 1.5 ton, 2 ton, etc.) of heating capacity to cooling capacity was multiplied by the rated (cooling side) capacity to estimate the heat pump capacity. Heat pump system output was then compared to its loading under design conditions.

The model uses the following set of normalized performance curves to scale the rated performance values as a function of outdoor dry-bulb temperature ranging from 65 to 115 degrees Fahrenheit. The total capacity and Energy Input Ratio ($EIR = 1/COP$) curves are a

¹⁵⁹ D. Cutler et al. Improved Modeling of Residential Air Conditioners and Heat Pumps for Energy Calculations. National Renewable Energy Laboratory. NREL/TP-5500-56354. January 2013. Tables 12 and 13. <http://www.nrel.gov/docs/fy13osti/56354.pdf>

function of entering wet-bulb temperature (EWB) and outdoor dry-bulb temperature (ODB) and are both quadratic curve fits of the form:

$$y = a + b \times T_{EWB} + c \times T_{EWB}^2 + d \times T_{ODB} + e \times T_{ODB}^2 + f \times T_{EWB} \times T_{ODB}$$

Equation 63

Table 2-102: Heat Pump Capacity Curve Coefficients¹⁶⁰

Coeff.	Cooling			Heating		
	Single Stage	Multi-Stage/Speed		Single Stage	Multi-Stage/Speed	
		Low	High		Low	High
a	3.670270705	3.940185508	3.109456535	0.566333415	0.335690634	0.306358843
b	-0.098652414	-0.104723455	-0.085520461	-0.000744164	0.002405123	0.005376987
c	0.000955906	0.001019298	0.000863238	-0.0000103	-0.0000464	-0.0000579
d	0.006552414	0.006471171	0.00863049	0.009414634	0.013498735	0.011645092
e	-0.0000156	-0.00000953	-0.000021	0.0000506	0.0000499	0.0000591
f	-0.000131877	-0.000161658	-0.000140186	-0.00000675	-0.00000725	-0.0000203


Table 2-103: Heat Pump EIR Curve Coefficients¹⁶¹

Coeff.	Cooling			Heating		
	Single Stage	Multi-Stage/Speed		Single Stage	Multi-Stage/Speed	
		Low	High		Low	High
a	-3.302695861	-3.87752688	-1.990708931	0.718398423	0.36338171	0.981100941
b	0.137871531	0.164566276	0.093969249	0.003498178	0.013523725	-0.005158493
c	-0.001056996	-0.001272755	-0.00073335	0.000142202	0.000258872	0.000243416
d	-0.012573945	-0.019956043	-0.009062553	-0.005724331	-0.009450269	-0.005274352
e	0.000214638	0.000256512	0.000165099	0.00014085	0.000439519	0.000230742
f	-0.000145054	-0.000133539	-0.0000997	-0.000215321	-0.000653723	-0.000336954

To estimate the baseline SEER value for retrofit installations, Texas A&M's Energy Systems Laboratory (ESL) surveyed dealers across the State to determine installation practices. The research found that in the event of a compressor failure out of warranty, dealers replaced the compressor 11.7 percent of the time, and replaced the condensing unit 88.3 percent of the time. Further, the condensing unit replacements consist of condensing unit-only replacements, replacements with mismatched evaporator coils, and replacements with matching evaporator coils. The percentages for these installations are as follows:

¹⁶⁰ Using air conditioner capacity curve coefficients for heat pump cooling savings.

¹⁶¹ Using air conditioner capacity EIR coefficients for heat pump cooling savings.

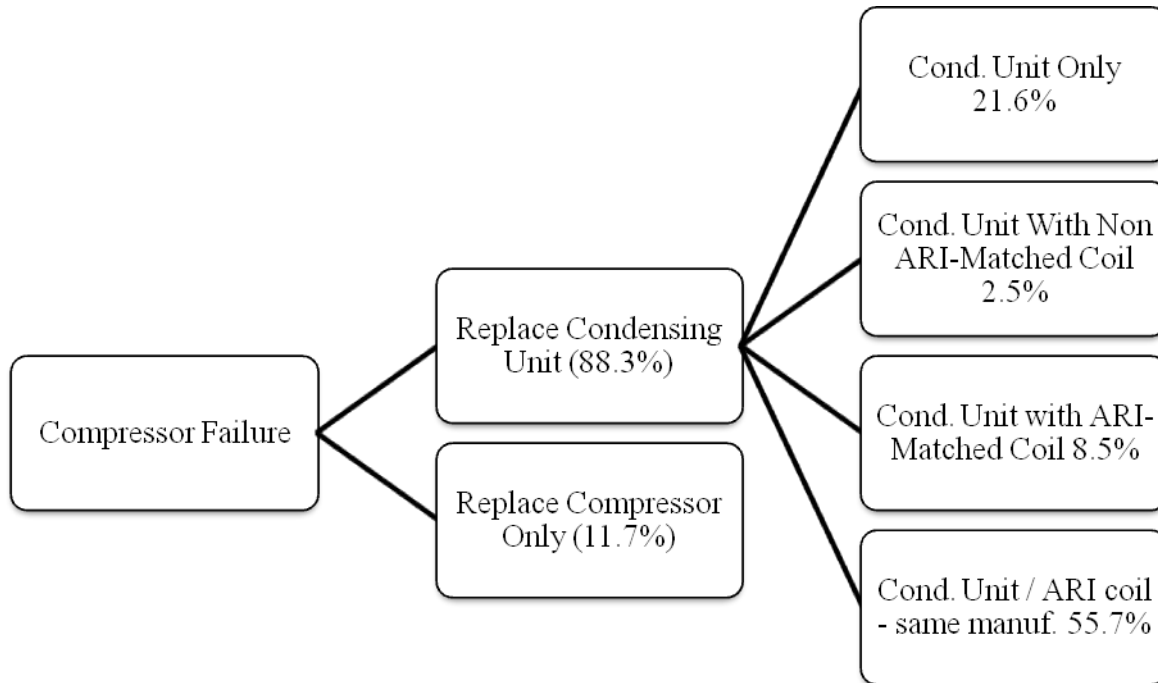

Source: Docket No. 36780

Figure 2-3: Unit Replacement Percentages upon Compressor Failure

To calculate a weighted average SEER for these installations, ESL assumed that a compressor-only replacement resulted in no increase in SEER, and that the SEER of a condensing unit installed without a matching coil would be 85 percent of the SEER value for a matched system. The ESL estimate of the baseline SEER for replacement AC units is given by the following equation:

$$\begin{aligned}
 SEER_{Base} = & (SEER_{Compressor Replacement}) \times (Actual \% Compressor Replacement) \\
 & + (SEER_{Condenser Replacement}) \times (Actual \% Condenser Replacement) \\
 & + (SEER_{System Replacement}) \times (Actual \% System Replacement)
 \end{aligned}$$

Equation 64

Substituting ESL SEER estimates and survey data provides the following baseline SEER estimate:

$$SEER_{Base} = (9.5) \times (11.7\%) + (11.05) \times (24.1\%) + (13.5) \times (64.2\%) = 12.44$$

Adjusting for the increased 14 SEER baseline:

$$SEER_{Base} = (10.5) \times (11.7\%) + (11.9) \times (24.1\%) + (14) \times (64.2\%) = 13.08$$

In new construction, there is no possibility of a partial system (e.g. condensing unit-only) change out, so the 13.08 baseline would not be appropriate. Therefore, the baseline for new construction installations is set at the federal government's minimum efficiency standard of 14 SEER.

Early Retirement

Annual energy (kWh) and summer peak demand (kW) savings must be calculated separately for two time periods:

1. **The estimated remaining life of the equipment that is being removed, designated the remaining useful life (RUL), and**
2. **The remaining time in the EUL period (15—RUL)**

Annual energy and summer peak demand savings are calculated by weighting the early retirement and replace-on-burnout savings by the RUL of the unit and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.

Where:

RUL = Remaining Useful Life (see Table 2-104); if unknown, assume the age of the replaced unit is equal to the EUL resulting in a default RUL of 6.0 years. For heat pumps replacing an air conditioner with an electric resistance furnace, use the RUL table from the Central Air Conditioner measure instead.

EUL = Estimated Useful Life = 15 years

Table 2-104: Remaining Useful Life of Replaced Unit

Age of Replaced Unit (years)	Remaining Useful Life (years)	Age of Replaced Unit (years)	Remaining Useful Life (years)
1	13.7	12	7.9
2	12.7	13	7.6
3	12.0	14	7.0
4	11.3	15	6.0
5	10.7	16	5.0
6	10.2	17	4.0
7	9.7	18	3.0
8	9.3	19	2.0
9	8.9	20	1.0
10	8.5	21 ^{162,163}	0.0
11	8.2		

¹⁶² RULs are capped at the 75th percentile of equipment age, 21 years, as determined based on DOE survival curves (Figure 2-4). Systems older than 21 years should use the ROB baseline. See the January 2015 memo, “Considerations for early replacement of residential equipment,” for further detail.

¹⁶³ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. “Considerations for early replacement of residential equipment.” Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to Texas investor-owned utilities through the EM&V team’s SharePoint.

Derivation of RULs

Central heat pumps have an estimated useful life of 15 years. This estimate is consistent with the age at which approximately 50 percent of the central heat pumps installed in a given year will no longer be in service, as described by the survival function in Figure 2-4.

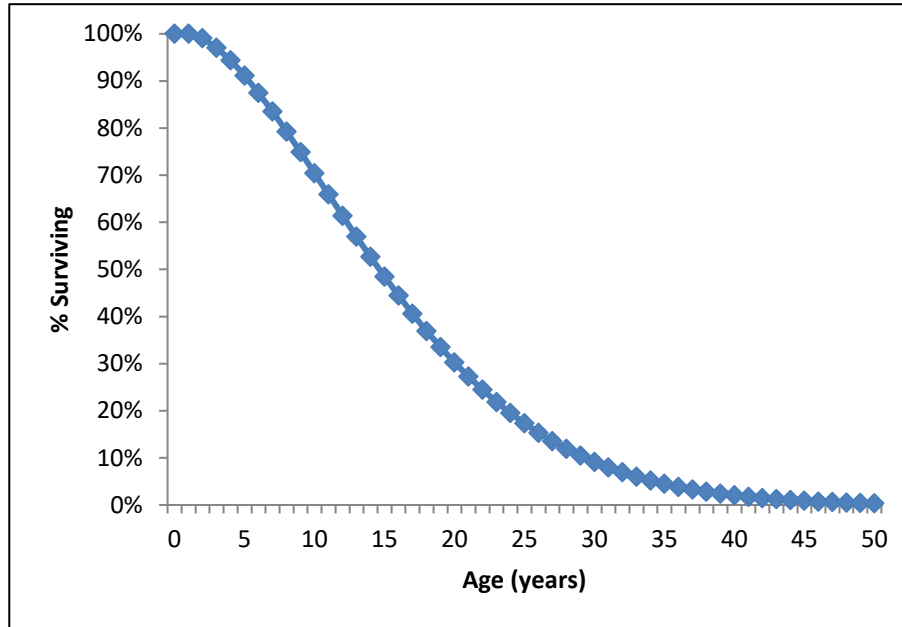


Figure 2-4: Survival Function for Central Heat Pumps¹⁶⁴

The method for estimating the remaining useful life (RUL) of a replaced system uses the age of the existing system to re-estimate the projected unit lifetime based on the survival function shown in Figure 2-4. The age of the central heat pump being replaced is found on the horizontal axis, and the corresponding percentage of surviving heat pumps is determined from the chart. The surviving percentage value is then divided in half, creating a new estimated useful lifetime applicable to the current unit age. The age (year) that corresponds to this new percentage is read from the chart. RUL is estimated as the difference between that age and the current age of the system being replaced.

¹⁶⁴ Department of Energy, Federal Register, 76 FR 37408, Technical Support Document: 8.2.3.5 Lifetime. June 2011. http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75. Download TSD at: <http://www.regulations.gov/#!documentDetail:D=EERE-2011-BT-STD-0011-0012>.

Deemed Energy Savings Tables

Cooling, New Construction

Table 2-105 through Table 2-109 present the energy savings (kWh) for cooling load types associated with a central heat pump being installed during new construction for all five Texas climate zones.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-105: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 1

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	65	124	231	396	461	617
2.0	86	166	307	529	615	822
2.5	108	207	384	661	769	1,028
3.0	129	248	461	793	922	1,234
3.5	151	290	538	925	1,076	1,439
4.0	172	331	615	1,057	1,230	1,645
5.0	215	414	769	1,322	1,537	2,056

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-106: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 2

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	105	201	374	649	753	1,008
2.0	140	268	498	865	1,004	1,343
2.5	174	335	623	1,082	1,256	1,679
3.0	209	403	748	1,298	1,507	2,015
3.5	244	470	872	1,514	1,758	2,351
4.0	279	537	997	1,731	2,009	2,687
5.0	349	671	1,246	2,163	2,511	3,359

Climate Zone 3: South Region, Houston Weather Data

Table 2-107: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 3

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	123	236	438	756	879	1,175
2.0	163	314	584	1,008	1,172	1,566
2.5	204	393	729	1,260	1,465	1,958
3.0	245	471	875	1,512	1,757	2,350
3.5	286	550	1,021	1,764	2,050	2,741
4.0	327	628	1,167	2,017	2,343	3,133
5.0	409	786	1,459	2,521	2,929	3,916

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-108: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 4

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	136	261	485	857	992	1,323
2.0	181	348	647	1,143	1,322	1,764
2.5	226	436	809	1,429	1,653	2,206
3.0	272	523	971	1,715	1,983	2,647
3.5	317	610	1,132	2,000	2,314	3,088
4.0	362	697	1,294	2,286	2,644	3,529
5.0	453	871	1,618	2,858	3,306	4,411

Climate Zone 5: West Region El Paso Weather Data

Table 2-109: Energy Savings (Cooling kWh) for 14.0 SEER New Construction Baseline—Zone 5

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9	18.0–20.9	21.0+
1.5	90	172	320	566	655	873
2.0	119	230	427	755	873	1,164
2.5	149	287	533	944	1,092	1,455
3.0	179	345	640	1,133	1,310	1,746
3.5	209	402	746	1,322	1,528	2,037
4.0	239	459	853	1,511	1,747	2,328
5.0	299	574	1,066	1,888	2,183	2,910

Cooling, Replace-on-Burnout

Table 2-110 through Table 2-114 present the energy savings (kWh) for cooling load types associated with a central heat pump replacing on burnout an HVAC system for all five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been to change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-110: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	178						
2.0	754	237					
2.5	1,330	813	297				
3.0	1,906	1,389	873	356			
3.5	2,482	1,965	1,449	932	416		
4.0	3,058	2,541	2,025	1,508	992	475	
5.0	4,210	3,693	3,177	2,660	2,143	1,627	594
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	238						
2.0	814	317					
2.5	1,390	893	396				
3.0	1,966	1,469	972	475			
3.5	2,541	2,045	1,548	1,051	555		
4.0	3,117	2,621	2,124	1,627	1,131	634	
5.0	4,269	3,773	3,276	2,779	2,283	1,786	792

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	344						
2.0	920	459					
2.5	1,496	1,035	574				
3.0	2,072	1,611	1,150	688			
3.5	2,648	2,187	1,725	1,264	803		
4.0	3,224	2,763	2,301	1,840	1,379	918	
5.0	4,376	3,915	3,453	2,992	2,531	2,070	1,147
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	510						
2.0	1,086	680					
2.5	1,662	1,256	850				
3.0	2,238	1,832	1,426	1,020			
3.5	2,814	2,408	2,002	1,596	1,190		
4.0	3,390	2,984	2,578	2,172	1,766	1,360	
5.0	4,542	4,136	3,730	3,324	2,918	2,512	1,700
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	575						
2.0	1,151	766					
2.5	1,727	1,342	958				
3.0	2,303	1,918	1,534	1,149			
3.5	2,879	2,494	2,110	1,725	1,341		
4.0	3,454	3,070	2,686	2,301	1,917	1,533	
5.0	4,606	4,222	3,838	3,453	3,069	2,684	1,916

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	730						
2.0	1,306	974					
2.5	1,882	1,550	1,217				
3.0	2,458	2,126	1,793	1,461			
3.5	3,034	2,702	2,369	2,037	1,704		
4.0	3,610	3,278	2,945	2,613	2,280	1,948	
5.0	4,762	4,430	4,097	3,765	3,432	3,100	2,435

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-111: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	289						
2.0	1,222	385					
2.5	2,156	1,318	481				
3.0	3,089	2,252	1,415	577			
3.5	4,023	3,186	2,348	1,511	674		
4.0	4,956	4,119	3,282	2,445	1,607	770	
5.0	6,824	5,986	5,149	4,312	3,474	2,637	962
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	385						
2.0	1,319	514					
2.5	2,252	1,447	642				
3.0	3,186	2,381	1,576	771			
3.5	4,120	3,314	2,509	1,704	899		
4.0	5,053	4,248	3,443	2,638	1,833	1,028	
5.0	6,920	6,115	5,310	4,505	3,700	2,895	1,284

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	558						
2.0	1,491	744					
2.5	2,425	1,677	930				
3.0	3,359	2,611	1,863	1,116			
3.5	4,292	3,544	2,797	2,049	1,302		
4.0	5,226	4,478	3,730	2,983	2,235	1,488	
5.0	7,093	6,345	5,598	4,850	4,102	3,355	1,859
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	833						
2.0	1,767	1,111					
2.5	2,700	2,044	1,388				
3.0	3,634	2,978	2,322	1,666			
3.5	4,567	3,911	3,256	2,600	1,944		
4.0	5,501	4,845	4,189	3,533	2,877	2,221	
5.0	7,368	6,712	6,056	5,400	4,744	4,089	2,777
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	937						
2.0	1,871	1,250					
2.5	2,805	2,183	1,562				
3.0	3,738	3,117	2,496	1,875			
3.5	4,672	4,051	3,429	2,808	2,187		
4.0	5,605	4,984	4,363	3,742	3,121	2,500	
5.0	7,472	6,851	6,230	5,609	4,988	4,367	3,125

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,192						
2.0	2,125	1,589					
2.5	3,059	2,522	1,986				
3.0	3,992	3,456	2,920	2,383			
3.5	4,926	4,389	3,853	3,317	2,780		
4.0	5,859	5,323	4,787	4,250	3,714	3,178	
5.0	7,727	7,190	6,654	6,117	5,581	5,045	3,972

Climate Zone 3: South Region, Houston Weather Data

Table 2-112: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	338						
2.0	1,431	451					
2.5	2,524	1,544	563				
3.0	3,617	2,637	1,656	676			
3.5	4,710	3,730	2,750	1,769	789		
4.0	5,803	4,823	3,843	2,862	1,882	901	
5.0	7,990	7,009	6,029	5,048	4,068	3,088	1,127
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	451						
2.0	1,544	602					
2.5	2,637	1,695	752				
3.0	3,730	2,788	1,845	902			
3.5	4,823	3,881	2,938	1,995	1,053		
4.0	5,917	4,974	4,031	3,089	2,146	1,203	
5.0	8,103	7,160	6,217	5,275	4,332	3,389	1,504

16.0 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	653						
2.0	1,746	871					
2.5	2,839	1,964	1,089				
3.0	3,932	3,057	2,182	1,306			
3.5	5,026	4,150	3,275	2,399	1,524		
4.0	6,119	5,243	4,368	3,493	2,617	1,742	
5.0	8,305	7,429	6,554	5,679	4,803	3,928	2,177
17.0 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	972						
2.0	2,065	1,296					
2.5	3,158	2,389	1,619				
3.0	4,251	3,482	2,713	1,943			
3.5	5,344	4,575	3,806	3,036	2,267		
4.0	6,437	5,668	4,899	4,130	3,360	2,591	
5.0	8,623	7,854	7,085	6,316	5,547	4,777	3,239
18.0 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,094						
2.0	2,187	1,459					
2.5	3,280	2,552	1,824				
3.0	4,373	3,645	2,917	2,188			
3.5	5,467	4,738	4,010	3,282	2,553		
4.0	6,560	5,831	5,103	4,375	3,646	2,918	
5.0	8,746	8,017	7,289	6,561	5,832	5,104	3,647

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,390						
2.0	2,483	1,854					
2.5	3,576	2,947	2,317				
3.0	4,670	4,040	3,410	2,781			
3.5	5,763	5,133	4,503	3,874	3,244		
4.0	6,856	6,226	5,596	4,967	4,337	3,707	
5.0	9,042	8,412	7,783	7,153	6,523	5,894	4,634

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-113: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	375						
2.0	1,587	500					
2.5	2,799	1,712	625				
3.0	4,011	2,924	1,837	750			
3.5	5,223	4,136	3,049	1,962	875		
4.0	6,435	5,348	4,261	3,174	2,087	1,000	
5.0	8,860	7,772	6,685	5,598	4,511	3,424	1,250
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	500						
2.0	1,712	667					
2.5	2,924	1,879	834				
3.0	4,137	3,091	2,046	1,001			
3.5	5,349	4,303	3,258	2,213	1,167		
4.0	6,561	5,515	4,470	3,425	2,379	1,334	
5.0	8,985	7,940	6,894	5,849	4,804	3,758	1,668

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	724						
2.0	1,936	966					
2.5	3,148	2,178	1,207				
3.0	4,361	3,390	2,419	1,449			
3.5	5,573	4,602	3,631	2,661	1,690		
4.0	6,785	5,814	4,843	3,873	2,902	1,931	
5.0	9,209	8,238	7,268	6,297	5,326	4,356	2,414
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,096						
2.0	2,308	1,462					
2.5	3,520	2,674	1,827				
3.0	4,733	3,886	3,039	2,192			
3.5	5,945	5,098	4,251	3,405	2,558		
4.0	7,157	6,310	5,463	4,617	3,770	2,923	
5.0	9,581	8,734	7,888	7,041	6,194	5,347	3,654
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,231						
2.0	2,443	1,641					
2.5	3,655	2,853	2,051				
3.0	4,867	4,065	3,263	2,461			
3.5	6,079	5,277	4,475	3,673	2,871		
4.0	7,291	6,489	5,687	4,885	4,084	3,282	
5.0	9,715	8,913	8,112	7,310	6,508	5,706	4,102

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,562						
2.0	2,774	2,083					
2.5	3,986	3,295	2,604				
3.0	5,199	4,507	3,816	3,125			
3.5	6,411	5,719	5,028	4,337	3,645		
4.0	7,623	6,931	6,240	5,549	4,857	4,166	
5.0	10,047	9,356	8,664	7,973	7,282	6,590	5,208

Climate Zone 5: West Region El Paso Weather Data

Table 2-114: Energy Savings (Cooling kWh) for 13.08 SEER Replace-on-Burnout Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	247						
2.0	1,046	329					
2.5	1,845	1,128	412				
3.0	2,644	1,927	1,211	494			
3.5	3,443	2,726	2,010	1,293	577		
4.0	4,242	3,525	2,809	2,092	1,376	659	
5.0	5,840	5,123	4,407	3,690	2,974	2,257	824
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	330						
2.0	1,129	440					
2.5	1,928	1,239	550				
3.0	2,727	2,038	1,349	660			
3.5	3,526	2,837	2,148	1,459	770		
4.0	4,325	3,636	2,947	2,258	1,569	879	
5.0	5,923	5,234	4,545	3,856	3,167	2,477	1,099

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	477						
2.0	1,276	637					
2.5	2,075	1,436	796				
3.0	2,874	2,235	1,595	955			
3.5	3,673	3,034	2,394	1,754	1,114		
4.0	4,472	3,833	3,193	2,553	1,913	1,273	
5.0	6,070	5,431	4,791	4,151	3,511	2,871	1,591
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	724						
2.0	1,523	965					
2.5	2,322	1,764	1,207				
3.0	3,121	2,563	2,006	1,448			
3.5	3,920	3,362	2,805	2,247	1,689		
4.0	4,719	4,161	3,604	3,046	2,488	1,931	
5.0	6,317	5,759	5,202	4,644	4,086	3,529	2,413
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	813						
2.0	1,612	1,083					
2.5	2,411	1,882	1,354				
3.0	3,210	2,681	2,153	1,625			
3.5	4,009	3,480	2,952	2,424	1,896		
4.0	4,808	4,279	3,751	3,223	2,695	2,167	
5.0	6,406	5,877	5,349	4,821	4,293	3,765	2,708

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,031						
2.0	1,830	1,374					
2.5	2,629	2,173	1,718				
3.0	3,428	2,972	2,517	2,061			
3.5	4,227	3,771	3,316	2,860	2,405		
4.0	5,026	4,570	4,115	3,659	3,204	2,748	
5.0	6,624	6,168	5,713	5,257	4,802	4,346	3,435

Cooling, Early Retirement

Table 2-115 through Table 2-124 present the cooling energy savings (kWh) associated with the installation of a central heat pump following the early retirement of an HVAC system for all five Texas climate zones. These savings can be used with the replace-on-burnout energy savings in Table 2-110 through Table 2-114 to calculate annual cooling savings. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-115: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	267						
2.0	873	356					
2.5	1,478	962	445				
3.0	2,084	1,567	1,051	534			
3.5	2,689	2,173	1,656	1,140	623		
4.0	3,295	2,778	2,262	1,745	1,229	712	
5.0	4,506	3,989	3,473	2,956	2,440	1,923	890

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	327						
2.0	932	435					
2.5	1,538	1,041	544				
3.0	2,143	1,647	1,150	653			
3.5	2,749	2,252	1,756	1,259	762		
4.0	3,354	2,858	2,361	1,864	1,368	871	
5.0	4,566	4,069	3,572	3,076	2,579	2,082	1,089
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	433						
2.0	1,039	577					
2.5	1,644	1,183	722				
3.0	2,250	1,789	1,327	866			
3.5	2,855	2,394	1,933	1,472	1,010		
4.0	3,461	3,000	2,538	2,077	1,616	1,155	
5.0	4,672	4,211	3,750	3,288	2,827	2,366	1,443
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	599						
2.0	1,204	799					
2.5	1,810	1,404	998				
3.0	2,416	2,010	1,604	1,198			
3.5	3,021	2,615	2,209	1,803	1,397		
4.0	3,627	3,221	2,815	2,409	2,003	1,597	
5.0	4,838	4,432	4,026	3,620	3,214	2,808	1,996

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	664						
2.0	1,269	885					
2.5	1,875	1,490	1,106				
3.0	2,480	2,096	1,712	1,327			
3.5	3,086	2,702	2,317	1,933	1,548		
4.0	3,691	3,307	2,923	2,538	2,154	1,770	
5.0	4,903	4,518	4,134	3,750	3,365	2,981	2,212

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	819						
2.0	1,425	1,092					
2.5	2,030	1,698	1,365				
3.0	2,636	2,304	1,971	1,639			
3.5	3,242	2,909	2,577	2,244	1,912		
4.0	3,847	3,515	3,182	2,850	2,517	2,185	
5.0	5,058	4,726	4,393	4,061	3,728	3,396	2,731

Table 2-116: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	710						
2.0	1,464	947					
2.5	2,217	1,700	1,184				
3.0	2,970	2,454	1,937	1,421			
3.5	3,724	3,207	2,690	2,174	1,657		
4.0	4,477	3,960	3,444	2,927	2,411	1,894	
5.0	5,984	5,467	4,950	4,434	3,917	3,401	2,368

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	770						
2.0	1,523	1,027					
2.5	2,277	1,780	1,283				
3.0	3,030	2,533	2,036	1,540			
3.5	3,783	3,287	2,790	2,293	1,796		
4.0	4,537	4,040	3,543	3,046	2,550	2,053	
5.0	6,043	5,547	5,050	4,553	4,056	3,560	2,566
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	876						
2.0	1,630	1,168					
2.5	2,383	1,922	1,461				
3.0	3,136	2,675	2,214	1,753			
3.5	3,890	3,428	2,967	2,506	2,045		
4.0	4,643	4,182	3,721	3,259	2,798	2,337	
5.0	6,150	5,688	5,227	4,766	4,305	3,844	2,921
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,042						
2.0	1,796	1,390					
2.5	2,549	2,143	1,737				
3.0	3,302	2,896	2,490	2,084			
3.5	4,056	3,650	3,244	2,838	2,432		
4.0	4,809	4,403	3,997	3,591	3,185	2,779	
5.0	6,316	5,910	5,504	5,098	4,692	4,286	3,474

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,107						
2.0	1,860	1,476					
2.5	2,614	2,229	1,845				
3.0	3,367	2,983	2,598	2,214			
3.5	4,120	3,736	3,351	2,967	2,583		
4.0	4,874	4,489	4,105	3,720	3,336	2,952	
5.0	6,380	5,996	5,612	5,227	4,843	4,458	3,690

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,263						
2.0	2,016	1,683					
2.5	2,769	2,437	2,104				
3.0	3,523	3,190	2,858	2,525			
3.5	4,276	3,943	3,611	3,278	2,946		
4.0	5,029	4,697	4,364	4,032	3,699	3,367	
5.0	6,536	6,203	5,871	5,538	5,206	4,874	4,209

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-117: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	433						
2.0	1,414	577					
2.5	2,396	1,559	721				
3.0	3,378	2,540	1,703	866			
3.5	4,359	3,522	2,684	1,847	1,010		
4.0	5,341	4,503	3,666	2,829	1,991	1,154	
5.0	7,304	6,467	5,629	4,792	3,955	3,117	1,443

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	529						
2.0	1,511	706					
2.5	2,493	1,687	882				
3.0	3,474	2,669	1,864	1,059			
3.5	4,456	3,651	2,846	2,040	1,235		
4.0	5,437	4,632	3,827	3,022	2,217	1,412	
5.0	7,400	6,595	5,790	4,985	4,180	3,375	1,765
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	702						
2.0	1,684	936					
2.5	2,665	1,917	1,170				
3.0	3,647	2,899	2,151	1,404			
3.5	4,628	3,881	3,133	2,385	1,638		
4.0	5,610	4,862	4,115	3,367	2,619	1,872	
5.0	7,573	6,825	6,078	5,330	4,583	3,835	2,340
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	977						
2.0	1,959	1,303					
2.5	2,940	2,284	1,629				
3.0	3,922	3,266	2,610	1,954			
3.5	4,903	4,248	3,592	2,936	2,280		
4.0	5,885	5,229	4,573	3,917	3,262	2,606	
5.0	7,848	7,192	6,536	5,881	5,225	4,569	3,257

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,081						
2.0	2,063	1,442					
2.5	3,045	2,424	1,802				
3.0	4,026	3,405	2,784	2,163			
3.5	5,008	4,387	3,766	3,145	2,523		
4.0	5,989	5,368	4,747	4,126	3,505	2,884	
5.0	7,953	7,331	6,710	6,089	5,468	4,847	3,605

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,336						
2.0	2,317	1,781					
2.5	3,299	2,763	2,226				
3.0	4,280	3,744	3,208	2,671			
3.5	5,262	4,726	4,189	3,653	3,117		
4.0	6,244	5,707	5,171	4,635	4,098	3,562	
5.0	8,207	7,670	7,134	6,598	6,061	5,525	4,452

Table 2-118: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,151						
2.0	2,372	1,535					
2.5	3,593	2,756	1,919				
3.0	4,815	3,977	3,140	2,303			
3.5	6,036	5,198	4,361	3,524	2,686		
4.0	7,257	6,419	5,582	4,745	3,907	3,070	
5.0	9,699	8,862	8,024	7,187	6,350	5,512	3,838

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,248						
2.0	2,469	1,664					
2.5	3,690	2,885	2,080				
3.0	4,911	4,106	3,301	2,496			
3.5	6,132	5,327	4,522	3,717	2,912		
4.0	7,353	6,548	5,743	4,938	4,133	3,328	
5.0	9,796	8,990	8,185	7,380	6,575	5,770	4,160
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,420						
2.0	2,642	1,894					
2.5	3,863	3,115	2,367				
3.0	5,084	4,336	3,589	2,841			
3.5	6,305	5,557	4,810	4,062	3,314		
4.0	7,526	6,778	6,031	5,283	4,535	3,788	
5.0	9,968	9,220	8,473	7,725	6,978	6,230	4,735
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,696						
2.0	2,917	2,261					
2.5	4,138	3,482	2,826				
3.0	5,359	4,703	4,047	3,391			
3.5	6,580	5,924	5,268	4,612	3,957		
4.0	7,801	7,145	6,489	5,833	5,178	4,522	
5.0	10,243	9,587	8,932	8,276	7,620	6,964	5,652

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,800						
2.0	3,021	2,400					
2.5	4,242	3,621	3,000				
3.0	5,463	4,842	4,221	3,600			
3.5	6,684	6,063	5,442	4,821	4,200		
4.0	7,905	7,284	6,663	6,042	5,421	4,800	
5.0	10,348	9,727	9,105	8,484	7,863	7,242	6,000

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,054						
2.0	3,275	2,739					
2.5	4,496	3,960	3,424				
3.0	5,717	5,181	4,645	4,108			
3.5	6,939	6,402	5,866	5,330	4,793		
4.0	8,160	7,623	7,087	6,551	6,014	5,478	
5.0	10,602	10,065	9,529	8,993	8,456	7,920	6,847

Climate Zone 3: South Region, Houston Weather Data

Table 2-119: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	507						
2.0	1,656	676					
2.5	2,805	1,825	845				
3.0	3,955	2,974	1,994	1,014			
3.5	5,104	4,124	3,143	2,163	1,182		
4.0	6,253	5,273	4,293	3,312	2,332	1,351	
5.0	8,552	7,572	6,591	5,611	4,630	3,650	1,689

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	620						
2.0	1,769	826					
2.5	2,919	1,976	1,033				
3.0	4,068	3,125	2,182	1,240			
3.5	5,217	4,274	3,332	2,389	1,446		
4.0	6,366	5,424	4,481	3,538	2,596	1,653	
5.0	8,665	7,722	6,780	5,837	4,894	3,952	2,066
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	822						
2.0	1,971	1,096					
2.5	3,121	2,245	1,370				
3.0	4,270	3,394	2,519	1,644			
3.5	5,419	4,544	3,668	2,793	1,918		
4.0	6,568	5,693	4,818	3,942	3,067	2,192	
5.0	8,867	7,992	7,116	6,241	5,366	4,490	2,740
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,140						
2.0	2,290	1,521					
2.5	3,439	2,670	1,901				
3.0	4,588	3,819	3,050	2,281			
3.5	5,738	4,968	4,199	3,430	2,661		
4.0	6,887	6,118	5,349	4,579	3,810	3,041	
5.0	9,186	8,416	7,647	6,878	6,109	5,340	3,801

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,263						
2.0	2,412	1,684					
2.5	3,562	2,833	2,105				
3.0	4,711	3,983	3,254	2,526			
3.5	5,860	5,132	4,404	3,675	2,947		
4.0	7,010	6,281	5,553	4,824	4,096	3,368	
5.0	9,308	8,580	7,851	7,123	6,395	5,666	4,210

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,559						
2.0	2,708	2,079					
2.5	3,858	3,228	2,598				
3.0	5,007	4,377	3,748	3,118			
3.5	6,156	5,527	4,897	4,267	3,638		
4.0	7,306	6,676	6,046	5,417	4,787	4,157	
5.0	9,604	8,975	8,345	7,715	7,086	6,456	5,197

Table 2-120: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,348						
2.0	2,778	1,797					
2.5	4,208	3,227	2,247				
3.0	5,637	4,657	3,677	2,696			
3.5	7,067	6,087	5,106	4,126	3,145		
4.0	8,497	7,516	6,536	5,556	4,575	3,595	
5.0	11,356	10,376	9,396	8,415	7,435	6,454	4,494

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,461						
2.0	2,891	1,948					
2.5	4,321	3,378	2,435				
3.0	5,750	4,808	3,865	2,922			
3.5	7,180	6,237	5,295	4,352	3,409		
4.0	8,610	7,667	6,725	5,782	4,839	3,896	
5.0	11,469	10,527	9,584	8,641	7,699	6,756	4,871
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,663						
2.0	3,093	2,218					
2.5	4,523	3,647	2,772				
3.0	5,952	5,077	4,202	3,326			
3.5	7,382	6,507	5,631	4,756	3,881		
4.0	8,812	7,937	7,061	6,186	5,311	4,435	
5.0	11,671	10,796	9,921	9,045	8,170	7,295	5,544
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,982						
2.0	3,411	2,642					
2.5	4,841	4,072	3,303				
3.0	6,271	5,502	4,733	3,963			
3.5	7,701	6,932	6,162	5,393	4,624		
4.0	9,130	8,361	7,592	6,823	6,054	5,285	
5.0	11,990	11,221	10,452	9,682	8,913	8,144	6,606

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,104						
2.0	3,534	2,806					
2.5	4,964	4,235	3,507				
3.0	6,393	5,665	4,937	4,208			
3.5	7,823	7,095	6,367	5,638	4,910		
4.0	9,253	8,525	7,796	7,068	6,340	5,611	
5.0	12,112	11,384	10,656	9,927	9,199	8,471	7,014

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,400						
2.0	3,830	3,200					
2.5	5,260	4,630	4,001				
3.0	6,690	6,060	5,430	4,801			
3.5	8,119	7,490	6,860	6,230	5,601		
4.0	9,549	8,919	8,290	7,660	7,030	6,401	
5.0	12,409	11,779	11,149	10,520	9,890	9,260	8,001

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-121: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	562						
2.0	1,836	749					
2.5	3,111	2,024	937				
3.0	4,385	3,298	2,211	1,124			
3.5	5,660	4,573	3,485	2,398	1,311		
4.0	6,934	5,847	4,760	3,673	2,586	1,498	
5.0	9,483	8,396	7,309	6,222	5,135	4,047	1,873

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	687						
2.0	1,962	916					
2.5	3,236	2,191	1,146				
3.0	4,511	3,465	2,420	1,375			
3.5	5,785	4,740	3,695	2,649	1,604		
4.0	7,060	6,014	4,969	3,924	2,878	1,833	
5.0	9,609	8,563	7,518	6,473	5,427	4,382	2,291
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	911						
2.0	2,186	1,215					
2.5	3,460	2,490	1,519				
3.0	4,735	3,764	2,793	1,823			
3.5	6,009	5,039	4,068	3,097	2,127		
4.0	7,284	6,313	5,342	4,372	3,401	2,430	
5.0	9,833	8,862	7,891	6,921	5,950	4,979	3,038
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,283						
2.0	2,558	1,711					
2.5	3,832	2,986	2,139				
3.0	5,107	4,260	3,413	2,567			
3.5	6,381	5,534	4,688	3,841	2,994		
4.0	7,656	6,809	5,962	5,116	4,269	3,422	
5.0	10,205	9,358	8,511	7,664	6,818	5,971	4,278

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,418						
2.0	2,692	1,890					
2.5	3,967	3,165	2,363				
3.0	5,241	4,439	3,637	2,835			
3.5	6,516	5,714	4,912	4,110	3,308		
4.0	7,790	6,988	6,186	5,384	4,582	3,781	
5.0	10,339	9,537	8,735	7,933	7,131	6,329	4,726

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,749						
2.0	3,024	2,332					
2.5	4,298	3,607	2,916				
3.0	5,573	4,881	4,190	3,499			
3.5	6,847	6,156	5,464	4,773	4,082		
4.0	8,122	7,430	6,739	6,048	5,356	4,665	
5.0	10,671	9,979	9,288	8,597	7,905	7,214	5,831

Table 2-122: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,495						
2.0	3,080	1,993					
2.5	4,666	3,579	2,491				
3.0	6,251	5,164	4,077	2,990			
3.5	7,837	6,749	5,662	4,575	3,488		
4.0	9,422	8,335	7,248	6,161	5,073	3,986	
5.0	12,593	11,506	10,419	9,331	8,244	7,157	4,983

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,620						
2.0	3,206	2,160					
2.5	4,791	3,746	2,700				
3.0	6,377	5,331	4,286	3,241			
3.5	7,962	6,917	5,871	4,826	3,781		
4.0	9,547	8,502	7,457	6,411	5,366	4,321	
5.0	12,718	11,673	10,628	9,582	8,537	7,492	5,401
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,844						
2.0	3,430	2,459					
2.5	5,015	4,044	3,074				
3.0	6,601	5,630	4,659	3,689			
3.5	8,186	7,215	6,245	5,274	4,303		
4.0	9,771	8,801	7,830	6,859	5,889	4,918	
5.0	12,942	11,972	11,001	10,030	9,060	8,089	6,148
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,216						
2.0	3,802	2,955					
2.5	5,387	4,540	3,694				
3.0	6,972	6,126	5,279	4,432			
3.5	8,558	7,711	6,865	6,018	5,171		
4.0	10,143	9,297	8,450	7,603	6,757	5,910	
5.0	13,314	12,468	11,621	10,774	9,927	9,081	7,387

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,351						
2.0	3,936	3,134					
2.5	5,521	4,720	3,918				
3.0	7,107	6,305	5,503	4,701			
3.5	8,692	7,890	7,089	6,287	5,485		
4.0	10,278	9,476	8,674	7,872	7,070	6,268	
5.0	13,449	12,647	11,845	11,043	10,241	9,439	7,835

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,682						
2.0	4,268	3,576					
2.5	5,853	5,162	4,470				
3.0	7,439	6,747	6,056	5,364			
3.5	9,024	8,333	7,641	6,950	6,259		
4.0	10,609	9,918	9,227	8,535	7,844	7,153	
5.0	13,780	13,089	12,398	11,706	11,015	10,324	8,941

Climate Zone 5: West Region El Paso Weather Data

Table 2-123: Energy Savings (Cooling kWh) for 12.44 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	370						
2.0	1,211	494					
2.5	2,051	1,334	617				
3.0	2,891	2,174	1,457	741			
3.5	3,731	3,014	2,298	1,581	864		
4.0	4,571	3,854	3,138	2,421	1,704	988	
5.0	6,251	5,535	4,818	4,101	3,385	2,668	1,235

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	453						
2.0	1,293	604					
2.5	2,133	1,444	755				
3.0	2,973	2,284	1,595	906			
3.5	3,814	3,124	2,435	1,746	1,057		
4.0	4,654	3,965	3,276	2,586	1,897	1,208	
5.0	6,334	5,645	4,956	4,267	3,578	2,889	1,510
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	601						
2.0	1,441	801					
2.5	2,281	1,641	1,001				
3.0	3,121	2,481	1,841	1,202			
3.5	3,961	3,321	2,681	2,042	1,402		
4.0	4,801	4,161	3,522	2,882	2,242	1,602	
5.0	6,482	5,842	5,202	4,562	3,922	3,282	2,003
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	847						
2.0	1,687	1,130					
2.5	2,528	1,970	1,412				
3.0	3,368	2,810	2,252	1,695			
3.5	4,208	3,650	3,092	2,535	1,977		
4.0	5,048	4,490	3,933	3,375	2,817	2,259	
5.0	6,728	6,170	5,613	5,055	4,497	3,940	2,824

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	936						
2.0	1,776	1,248					
2.5	2,616	2,088	1,560				
3.0	3,456	2,928	2,400	1,872			
3.5	4,296	3,768	3,240	2,712	2,184		
4.0	5,136	4,608	4,080	3,552	3,024	2,496	
5.0	6,817	6,288	5,760	5,232	4,704	4,176	3,120

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,154						
2.0	1,994	1,539					
2.5	2,834	2,379	1,923				
3.0	3,674	3,219	2,763	2,308			
3.5	4,514	4,059	3,603	3,148	2,693		
4.0	5,354	4,899	4,444	3,988	3,533	3,077	
5.0	7,035	6,579	6,124	5,668	5,213	4,757	3,846

Table 2-124: Energy Savings (Cooling kWh) for 10.0 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	985						
2.0	2,030	1,314					
2.5	3,076	2,359	1,642				
3.0	4,121	3,404	2,687	1,971			
3.5	5,166	4,449	3,732	3,016	2,299		
4.0	6,211	5,494	4,778	4,061	3,344	2,628	
5.0	8,301	7,584	6,868	6,151	5,435	4,718	3,285

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,068						
2.0	2,113	1,424					
2.5	3,158	2,469	1,780				
3.0	4,203	3,514	2,825	2,136			
3.5	5,248	4,559	3,870	3,181	2,492		
4.0	6,294	5,604	4,915	4,226	3,537	2,848	
5.0	8,384	7,695	7,006	6,317	5,627	4,938	3,560
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,216						
2.0	2,261	1,621					
2.5	3,306	2,666	2,026				
3.0	4,351	3,711	3,071	2,431			
3.5	5,396	4,756	4,116	3,477	2,837		
4.0	6,441	5,801	5,162	4,522	3,882	3,242	
5.0	8,531	7,892	7,252	6,612	5,972	5,332	4,052
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,462						
2.0	2,507	1,950					
2.5	3,552	2,995	2,437				
3.0	4,598	4,040	3,482	2,925			
3.5	5,643	5,085	4,527	3,970	3,412		
4.0	6,688	6,130	5,572	5,015	4,457	3,899	
5.0	8,778	8,220	7,663	7,105	6,547	5,990	4,874

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,551						
2.0	2,596	2,068					
2.5	3,641	3,113	2,585				
3.0	4,686	4,158	3,630	3,102			
3.5	5,731	5,203	4,675	4,147	3,619		
4.0	6,776	6,248	5,720	5,192	4,664	4,136	
5.0	8,867	8,338	7,810	7,282	6,754	6,226	5,169
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,769						
2.0	2,814	2,359					
2.5	3,859	3,404	2,948				
3.0	4,904	4,449	3,993	3,538			
3.5	5,949	5,494	5,038	4,583	4,127		
4.0	6,994	6,539	6,083	5,628	5,173	4,717	
5.0	9,085	8,629	8,174	7,718	7,263	6,807	5,896

Heating, New Construction or Replace-on-Burnout of a Heat Pump

Table 2-125 through Table 2-129 present the energy savings (kWh) for heating load types associated with a central heat pump being installed during new construction or replacing a burned-out central heat pump for all five Texas climate zones.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-125: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 1

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	125	203	346	475	535	592
2.0	167	271	462	634	713	789
2.5	209	339	577	792	892	987
3.0	251	406	693	951	1,070	1,184
3.5	292	474	808	1,109	1,248	1,381
4.0	334	542	924	1,267	1,427	1,578
5.0	418	677	1,155	1,584	1,783	1,973

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-126: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 2

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	71	115	195	268	302	334
2.0	94	153	260	357	402	445
2.5	118	191	326	447	503	556
3.0	141	229	391	536	604	668
3.5	165	267	456	626	704	779
4.0	189	306	521	715	805	890
5.0	236	382	651	894	1,006	1,113

Climate Zone 3: South Region, Houston Weather Data

Table 2-127: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 3

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	46	75	127	175	197	218
2.0	62	100	170	233	263	290
2.5	77	125	212	292	328	363
3.0	92	150	255	350	394	436
3.5	108	174	297	408	459	508
4.0	123	199	340	466	525	581
5.0	154	249	425	583	656	726

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-128: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 4

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	31	50	85	117	132	146
2.0	41	67	114	156	176	195
2.5	52	83	142	195	220	243
3.0	62	100	171	234	264	292
3.5	72	117	199	273	308	341
4.0	82	134	228	313	352	389
5.0	103	167	285	391	440	487

Climate Zone 5: West Region El Paso Weather Data

Table 2-129: Energy Savings (Heating kWh) for 8.2 HSPF Baseline—Zone 5

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	73	119	202	278	313	346
2.0	98	158	270	370	417	461
2.5	122	198	337	463	521	577
3.0	147	237	405	556	626	692
3.5	171	277	472	648	730	807
4.0	195	317	540	741	834	923
5.0	244	396	675	926	1,043	1,153

Heating, Replace-on-Burnout—Replacement of an Electric Resistance Furnace

Table 2-130 through Table 2-134 present the energy savings (kWh) per heating load type associated with a central heat pump replacing on burnout an electric resistance furnace for all five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-130: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,193						
2.0	9,224	8,257					
2.5	12,254	11,288	10,321				
3.0	15,285	14,319	13,352	12,386			
3.5	18,316	17,349	16,383	15,416	14,450		
4.0	21,346	20,380	19,414	18,447	17,481	16,514	
5.0	27,408	26,442	25,475	24,509	23,542	22,576	20,643
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,271						
2.0	9,301	8,361					
2.5	12,332	11,392	10,451				
3.0	15,363	14,422	13,482	12,541			
3.5	18,394	17,453	16,512	15,572	14,631		
4.0	21,424	20,484	19,543	18,603	17,662	16,722	
5.0	27,486	26,545	25,605	24,664	23,724	22,783	20,902
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,414						
2.0	9,445	8,552					
2.5	12,475	11,583	10,690				
3.0	15,506	14,613	13,720	12,828			
3.5	18,537	17,644	16,751	15,858	14,966		
4.0	21,568	20,675	19,782	18,889	17,996	17,104	
5.0	27,629	26,736	25,843	24,951	24,058	23,165	21,379

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,543						
2.0	9,573	8,724					
2.5	12,604	11,754	10,905				
3.0	15,635	14,785	13,935	13,085			
3.5	18,666	17,816	16,966	16,116	15,266		
4.0	21,696	20,847	19,997	19,147	18,297	17,447	
5.0	27,758	26,908	26,058	25,208	24,359	23,509	21,809
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,602						
2.0	9,633	8,803					
2.5	12,664	11,834	11,004				
3.0	15,695	14,865	14,035	13,205			
3.5	18,725	17,896	17,066	16,236	15,406		
4.0	21,756	20,926	20,096	19,266	18,437	17,607	
5.0	27,818	26,988	26,158	25,328	24,498	23,668	22,008
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	6,659						
2.0	9,690	8,879					
2.5	12,721	11,910	11,099				
3.0	15,752	14,941	14,130	13,319			
3.5	18,782	17,971	17,160	16,350	15,539		
4.0	21,813	21,002	20,191	19,380	18,569	17,758	
5.0	27,875	27,064	26,253	25,442	24,631	23,820	22,198

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-131: Energy Savings (Heating kWh) for 3.41HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,533						
2.0	5,241	4,710					
2.5	6,950	6,419	5,888				
3.0	8,659	8,128	7,596	7,065			
3.5	10,368	9,836	9,305	8,774	8,243		
4.0	12,076	11,545	11,014	10,483	9,951	9,420	
5.0	15,494	14,963	14,432	13,900	13,369	12,838	11,775
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,576						
2.0	5,285	4,769					
2.5	6,994	6,477	5,961				
3.0	8,703	8,186	7,669	7,153			
3.5	10,412	9,895	9,378	8,862	8,345		
4.0	12,120	11,604	11,087	10,570	10,054	9,537	
5.0	15,538	15,021	14,505	13,988	13,471	12,955	11,921
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,657						
2.0	5,366	4,876					
2.5	7,075	6,585	6,095				
3.0	8,784	8,294	7,804	7,314			
3.5	10,492	10,003	9,513	9,023	8,534		
4.0	12,201	11,711	11,222	10,732	10,242	9,753	
5.0	15,619	15,129	14,639	14,150	13,660	13,170	12,191

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,730						
2.0	5,439	4,973					
2.5	7,148	6,682	6,217				
3.0	8,856	8,391	7,925	7,460			
3.5	10,565	10,100	9,634	9,169	8,703		
4.0	12,274	11,808	11,343	10,877	10,412	9,947	
5.0	15,691	15,226	14,760	14,295	13,830	13,364	12,433
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,764						
2.0	5,472	5,018					
2.5	7,181	6,727	6,273				
3.0	8,890	8,436	7,982	7,527			
3.5	10,599	10,145	9,690	9,236	8,782		
4.0	12,308	11,853	11,399	10,945	10,491	10,036	
5.0	15,725	15,271	14,817	14,362	13,908	13,454	12,545
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,796						
2.0	5,505	5,061					
2.5	7,213	6,770	6,326				
3.0	8,922	8,479	8,035	7,591			
3.5	10,631	10,187	9,744	9,300	8,857		
4.0	12,340	11,896	11,453	11,009	10,565	10,122	
5.0	15,757	15,314	14,870	14,427	13,983	13,540	12,652

Climate Zone 3: South Region, Houston Weather Data

Table 2-132: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,315						
2.0	3,430	3,087					
2.5	4,546	4,202	3,859				
3.0	5,661	5,317	4,974	4,631			
3.5	6,776	6,433	6,089	5,746	5,402		
4.0	7,891	7,548	7,204	6,861	6,518	6,174	
5.0	10,122	9,778	9,435	9,091	8,748	8,404	7,718
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,344						
2.0	3,459	3,125					
2.5	4,574	4,240	3,907				
3.0	5,689	5,356	5,022	4,688			
3.5	6,805	6,471	6,137	5,803	5,469		
4.0	7,920	7,586	7,252	6,918	6,584	6,250	
5.0	10,150	9,816	9,482	9,149	8,815	8,481	7,813
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,397						
2.0	3,512	3,196					
2.5	4,627	4,311	3,994				
3.0	5,742	5,426	5,110	4,793			
3.5	6,857	6,541	6,225	5,908	5,592		
4.0	7,973	7,656	7,340	7,024	6,707	6,391	
5.0	10,203	9,887	9,570	9,254	8,938	8,621	7,989

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,444						
2.0	3,559	3,259					
2.5	4,674	4,374	4,073				
3.0	5,790	5,489	5,189	4,888			
3.5	6,905	6,604	6,304	6,003	5,703		
4.0	8,020	7,720	7,419	7,119	6,818	6,518	
5.0	10,250	9,950	9,649	9,349	9,048	8,748	8,147
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,466						
2.0	3,581	3,288					
2.5	4,696	4,403	4,110				
3.0	5,812	5,518	5,225	4,932			
3.5	6,927	6,634	6,340	6,047	5,754		
4.0	8,042	7,749	7,456	7,163	6,869	6,576	
5.0	10,272	9,979	9,686	9,393	9,100	8,807	8,220
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2,487						
2.0	3,602	3,316					
2.5	4,717	4,431	4,145				
3.0	5,833	5,546	5,260	4,974			
3.5	6,948	6,662	6,375	6,089	5,803		
4.0	8,063	7,777	7,491	7,204	6,918	6,632	
5.0	10,293	10,007	9,721	9,435	9,149	8,862	8,290

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-133: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,555						
2.0	2,304	2,074					
2.5	3,052	2,822	2,592				
3.0	3,801	3,571	3,341	3,110			
3.5	4,549	4,319	4,089	3,859	3,629		
4.0	5,298	5,068	4,838	4,607	4,377	4,147	
5.0	6,795	6,565	6,335	6,105	5,874	5,644	5,184
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,574						
2.0	2,323	2,099					
2.5	3,071	2,848	2,624				
3.0	3,820	3,596	3,373	3,149			
3.5	4,568	4,345	4,121	3,897	3,674		
4.0	5,317	5,093	4,870	4,646	4,422	4,198	
5.0	6,814	6,590	6,367	6,143	5,919	5,695	5,248
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,610						
2.0	2,358	2,146					
2.5	3,107	2,895	2,683				
3.0	3,855	3,643	3,431	3,219			
3.5	4,604	4,392	4,180	3,968	3,756		
4.0	5,352	5,140	4,928	4,716	4,505	4,293	
5.0	6,849	6,637	6,425	6,214	6,002	5,790	5,366

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,642						
2.0	2,390	2,189					
2.5	3,139	2,937	2,736				
3.0	3,887	3,686	3,484	3,283			
3.5	4,636	4,434	4,233	4,032	3,830		
4.0	5,384	5,183	4,981	4,780	4,579	4,377	
5.0	6,881	6,680	6,478	6,277	6,076	5,874	5,472
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,656						
2.0	2,405	2,208					
2.5	3,153	2,957	2,760				
3.0	3,902	3,705	3,509	3,312			
3.5	4,650	4,454	4,257	4,061	3,865		
4.0	5,399	5,202	5,006	4,810	4,613	4,417	
5.0	6,896	6,699	6,503	6,307	6,110	5,914	5,521
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,670						
2.0	2,419	2,227					
2.5	3,167	2,976	2,784				
3.0	3,916	3,724	3,532	3,341			
3.5	4,664	4,473	4,281	4,089	3,897		
4.0	5,413	5,221	5,029	4,838	4,646	4,454	
5.0	6,910	6,718	6,526	6,335	6,143	5,951	5,568

Climate Zone 5: West Region El Paso Weather Data

Table 2-134: Energy Savings (Heating kWh) for 3.41 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,677						
2.0	5,449	4,903					
2.5	7,220	6,674	6,129				
3.0	8,991	8,446	7,900	7,355			
3.5	10,763	10,217	9,672	9,126	8,581		
4.0	12,534	11,988	11,443	10,897	10,352	9,806	
5.0	16,076	15,531	14,985	14,440	13,894	13,349	12,258
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,723						
2.0	5,494	4,964					
2.5	7,265	6,735	6,205				
3.0	9,037	8,506	7,976	7,446			
3.5	10,808	10,278	9,747	9,217	8,687		
4.0	12,579	12,049	11,519	10,988	10,458	9,928	
5.0	16,122	15,591	15,061	14,531	14,000	13,470	12,409
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,807						
2.0	5,578	5,075					
2.5	7,349	6,847	6,344				
3.0	9,120	8,618	8,116	7,613			
3.5	10,892	10,389	9,887	9,384	8,882		
4.0	12,663	12,161	11,658	11,156	10,653	10,151	
5.0	16,206	15,703	15,201	14,698	14,196	13,693	12,689

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,882						
2.0	5,653	5,176					
2.5	7,425	6,947	6,470				
3.0	9,196	8,718	8,241	7,764			
3.5	10,967	10,490	10,012	9,535	9,058		
4.0	12,738	12,261	11,784	11,306	10,829	10,352	
5.0	16,281	15,804	15,326	14,849	14,372	13,894	12,940
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,917						
2.0	5,688	5,222					
2.5	7,459	6,994	6,528				
3.0	9,231	8,765	8,299	7,834			
3.5	11,002	10,536	10,071	9,605	9,139		
4.0	12,773	12,308	11,842	11,376	10,911	10,445	
5.0	16,316	15,850	15,385	14,919	14,453	13,988	13,056
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	3,950						
2.0	5,721	5,267					
2.5	7,493	7,038	6,584				
3.0	9,264	8,809	8,355	7,900			
3.5	11,035	10,581	10,126	9,672	9,217		
4.0	12,807	12,352	11,897	11,443	10,988	10,534	
5.0	16,349	15,895	15,440	14,985	14,531	14,076	13,167

Heating, Early Retirement—Replacement of a Heat Pump

See Table 2-135 through Table 2-144 for the energy savings (kWh) per heating load type associated with a central heat pump replacing another heat pump for all five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the

appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-135: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	413						
2.0	1,517	551					
2.5	2,621	1,655	688				
3.0	3,725	2,759	1,793	826			
3.5	4,830	3,863	2,897	1,930	964		
4.0	5,934	4,967	4,001	3,034	2,068	1,101	
5.0	8,142	7,176	6,209	5,243	4,276	3,310	1,377
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	491						
2.0	1,595	654					
2.5	2,699	1,759	818				
3.0	3,803	2,863	1,922	982			
3.5	4,907	3,967	3,026	2,086	1,145		
4.0	6,011	5,071	4,130	3,190	2,249	1,309	
5.0	8,220	7,279	6,339	5,398	4,458	3,517	1,636
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	634						
2.0	1,738	845					
2.5	2,842	1,950	1,057				
3.0	3,946	3,054	2,161	1,268			
3.5	5,051	4,158	3,265	2,372	1,479		
4.0	6,155	5,262	4,369	3,476	2,584	1,691	
5.0	8,363	7,470	6,577	5,685	4,792	3,899	2,113

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	763						
2.0	1,867	1,017					
2.5	2,971	2,121	1,272				
3.0	4,075	3,226	2,376	1,526			
3.5	5,180	4,330	3,480	2,630	1,780		
4.0	6,284	5,434	4,584	3,734	2,884	2,035	
5.0	8,492	7,642	6,792	5,942	5,093	4,243	2,543
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	823						
2.0	1,927	1,097					
2.5	3,031	2,201	1,371				
3.0	4,135	3,305	2,475	1,645			
3.5	5,239	4,409	3,579	2,750	1,920		
4.0	6,343	5,514	4,684	3,854	3,024	2,194	
5.0	8,552	7,722	6,892	6,062	5,232	4,402	2,742
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	880						
2.0	1,984	1,173					
2.5	3,088	2,277	1,466				
3.0	4,192	3,381	2,570	1,759			
3.5	5,296	4,485	3,674	2,863	2,052		
4.0	6,400	5,589	4,778	3,967	3,157	2,346	
5.0	8,609	7,798	6,987	6,176	5,365	4,554	2,932

Table 2-136: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,104						
2.0	2,439	1,472					
2.5	3,773	2,807	1,840				
3.0	5,108	4,141	3,175	2,208			
3.5	6,442	5,476	4,509	3,543	2,576		
4.0	7,777	6,810	5,844	4,877	3,911	2,944	
5.0	10,446	9,479	8,513	7,546	6,580	5,613	3,681
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,182						
2.0	2,516	1,576					
2.5	3,851	2,910	1,970				
3.0	5,185	4,245	3,304	2,364			
3.5	6,520	5,579	4,639	3,698	2,758		
4.0	7,855	6,914	5,973	5,033	4,092	3,152	
5.0	10,524	9,583	8,642	7,702	6,761	5,821	3,940
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,325						
2.0	2,660	1,767					
2.5	3,994	3,101	2,209				
3.0	5,329	4,436	3,543	2,650			
3.5	6,663	5,770	4,878	3,985	3,092		
4.0	7,998	7,105	6,212	5,319	4,427	3,534	
5.0	10,667	9,774	8,881	7,988	7,096	6,203	4,417

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,454						
2.0	2,789	1,939					
2.5	4,123	3,273	2,423				
3.0	5,458	4,608	3,758	2,908			
3.5	6,792	5,942	5,093	4,243	3,393		
4.0	8,127	7,277	6,427	5,577	4,727	3,878	
5.0	10,796	9,946	9,096	8,246	7,396	6,547	4,847
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,514						
2.0	2,848	2,018					
2.5	4,183	3,353	2,523				
3.0	5,517	4,687	3,858	3,028			
3.5	6,852	6,022	5,192	4,362	3,532		
4.0	8,186	7,357	6,527	5,697	4,867	4,037	
5.0	10,855	10,026	9,196	8,366	7,536	6,706	5,046
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1,571						
2.0	2,905	2,094					
2.5	4,240	3,429	2,618				
3.0	5,574	4,763	3,952	3,141			
3.5	6,909	6,098	5,287	4,476	3,665		
4.0	8,243	7,432	6,621	5,811	5,000	4,189	
5.0	10,912	10,101	9,290	8,480	7,669	6,858	5,236

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-137: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	233						
2.0	842	311					
2.5	1,451	920	388				
3.0	2,060	1,528	997	466			
3.5	2,669	2,137	1,606	1,075	544		
4.0	3,278	2,746	2,215	1,684	1,153	621	
5.0	4,495	3,964	3,433	2,902	2,370	1,839	777
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	277						
2.0	886	369					
2.5	1,495	978	461				
3.0	2,104	1,587	1,070	554			
3.5	2,712	2,196	1,679	1,163	646		
4.0	3,321	2,805	2,288	1,771	1,255	738	
5.0	4,539	4,023	3,506	2,989	2,473	1,956	923
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	358						
2.0	967	477					
2.5	1,575	1,086	596				
3.0	2,184	1,695	1,205	715			
3.5	2,793	2,304	1,814	1,324	834		
4.0	3,402	2,912	2,423	1,933	1,443	954	
5.0	4,620	4,130	3,641	3,151	2,661	2,171	1,192

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	430						
2.0	1,039	574					
2.5	1,648	1,183	717				
3.0	2,257	1,792	1,326	861			
3.5	2,866	2,401	1,935	1,470	1,004		
4.0	3,475	3,009	2,544	2,079	1,613	1,148	
5.0	4,693	4,227	3,762	3,296	2,831	2,365	1,434
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	464						
2.0	1,073	619					
2.5	1,682	1,228	773				
3.0	2,291	1,837	1,382	928			
3.5	2,900	2,445	1,991	1,537	1,083		
4.0	3,509	3,054	2,600	2,146	1,692	1,237	
5.0	4,726	4,272	3,818	3,364	2,910	2,455	1,547
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	496						
2.0	1,105	662					
2.5	1,714	1,270	827				
3.0	2,323	1,879	1,436	992			
3.5	2,932	2,488	2,045	1,601	1,158		
4.0	3,541	3,097	2,654	2,210	1,767	1,323	
5.0	4,759	4,315	3,871	3,428	2,984	2,541	1,654

Table 2-138: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	623						
2.0	1,362	830					
2.5	2,101	1,569	1,038				
3.0	2,839	2,308	1,777	1,246			
3.5	3,578	3,047	2,516	1,984	1,453		
4.0	4,317	3,786	3,255	2,723	2,192	1,661	
5.0	5,795	5,264	4,732	4,201	3,670	3,138	2,076
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	667						
2.0	1,406	889					
2.5	2,144	1,628	1,111				
3.0	2,883	2,367	1,850	1,333			
3.5	3,622	3,105	2,589	2,072	1,556		
4.0	4,361	3,844	3,328	2,811	2,294	1,778	
5.0	5,839	5,322	4,805	4,289	3,772	3,255	2,222
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	747						
2.0	1,486	997					
2.5	2,225	1,735	1,246				
3.0	2,964	2,474	1,985	1,495			
3.5	3,703	3,213	2,723	2,234	1,744		
4.0	4,442	3,952	3,462	2,973	2,483	1,993	
5.0	5,919	5,430	4,940	4,450	3,961	3,471	2,492

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	820						
2.0	1,559	1,094					
2.5	2,298	1,832	1,367				
3.0	3,037	2,571	2,106	1,640			
3.5	3,776	3,310	2,845	2,379	1,914		
4.0	4,514	4,049	3,584	3,118	2,653	2,187	
5.0	5,992	5,527	5,061	4,596	4,130	3,665	2,734
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	854						
2.0	1,593	1,138					
2.5	2,332	1,877	1,423				
3.0	3,070	2,616	2,162	1,708			
3.5	3,809	3,355	2,901	2,447	1,992		
4.0	4,548	4,094	3,640	3,185	2,731	2,277	
5.0	6,026	5,572	5,117	4,663	4,209	3,755	2,846
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	886						
2.0	1,625	1,181					
2.5	2,364	1,920	1,477				
3.0	3,103	2,659	2,215	1,772			
3.5	3,841	3,398	2,954	2,511	2,067		
4.0	4,580	4,137	3,693	3,250	2,806	2,363	
5.0	6,058	5,614	5,171	4,727	4,284	3,840	2,953

Climate Zone 3: South Region, Houston Weather Data

Table 2-139: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	152						
2.0	546	203					
2.5	940	597	253				
3.0	1,334	991	647	304			
3.5	1,728	1,385	1,042	698	355		
4.0	2,122	1,779	1,436	1,092	749	405	
5.0	2,911	2,567	2,224	1,880	1,537	1,194	507
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	181						
2.0	575	241					
2.5	969	635	301				
3.0	1,363	1,029	695	361			
3.5	1,757	1,423	1,089	755	421		
4.0	2,151	1,817	1,483	1,149	816	482	
5.0	2,939	2,605	2,272	1,938	1,604	1,270	602
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	233						
2.0	627	311					
2.5	1,022	705	389				
3.0	1,416	1,099	783	467			
3.5	1,810	1,493	1,177	861	544		
4.0	2,204	1,887	1,571	1,255	939	622	
5.0	2,992	2,676	2,359	2,043	1,727	1,410	778

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	281						
2.0	675	374					
2.5	1,069	768	468				
3.0	1,463	1,163	862	562			
3.5	1,857	1,557	1,256	956	655		
4.0	2,251	1,951	1,650	1,350	1,049	749	
5.0	3,039	2,739	2,438	2,138	1,837	1,537	936
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	303						
2.0	697	404					
2.5	1,091	798	505				
3.0	1,485	1,192	899	606			
3.5	1,879	1,586	1,293	1,000	706		
4.0	2,273	1,980	1,687	1,394	1,101	807	
5.0	3,061	2,768	2,475	2,182	1,889	1,596	1,009
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	324						
2.0	718	432					
2.5	1,112	826	540				
3.0	1,506	1,220	934	647			
3.5	1,900	1,614	1,328	1,042	755		
4.0	2,294	2,008	1,722	1,436	1,149	863	
5.0	3,082	2,796	2,510	2,224	1,938	1,651	1,079

Table 2-140: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	406						
2.0	885	542					
2.5	1,364	1,021	677				
3.0	1,843	1,500	1,156	813			
3.5	2,322	1,978	1,635	1,292	948		
4.0	2,801	2,457	2,114	1,770	1,427	1,084	
5.0	3,758	3,415	3,072	2,728	2,385	2,041	1,355
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	435						
2.0	914	580					
2.5	1,393	1,059	725				
3.0	1,872	1,538	1,204	870			
3.5	2,350	2,017	1,683	1,349	1,015		
4.0	2,829	2,495	2,162	1,828	1,494	1,160	
5.0	3,787	3,453	3,119	2,785	2,452	2,118	1,450
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	488						
2.0	967	650					
2.5	1,445	1,129	813				
3.0	1,924	1,608	1,292	975			
3.5	2,403	2,087	1,771	1,454	1,138		
4.0	2,882	2,566	2,249	1,933	1,617	1,301	
5.0	3,840	3,524	3,207	2,891	2,575	2,258	1,626

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	535						
2.0	1,014	714					
2.5	1,493	1,192	892				
3.0	1,972	1,671	1,371	1,070			
3.5	2,451	2,150	1,850	1,549	1,249		
4.0	2,930	2,629	2,329	2,028	1,728	1,427	
5.0	3,887	3,587	3,286	2,986	2,685	2,385	1,784
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	557						
2.0	1,036	743					
2.5	1,515	1,222	929				
3.0	1,994	1,701	1,407	1,114			
3.5	2,473	2,179	1,886	1,593	1,300		
4.0	2,952	2,658	2,365	2,072	1,779	1,486	
5.0	3,909	3,616	3,323	3,030	2,737	2,443	1,857
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	578						
2.0	1,057	771					
2.5	1,536	1,250	963				
3.0	2,015	1,729	1,442	1,156			
3.5	2,494	2,207	1,921	1,635	1,349		
4.0	2,972	2,686	2,400	2,114	1,828	1,542	
5.0	3,930	3,644	3,358	3,072	2,785	2,499	1,927

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-141: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	102						
2.0	366	136					
2.5	630	400	170				
3.0	894	664	434	204			
3.5	1,158	928	698	468	238		
4.0	1,422	1,192	962	732	502	272	
5.0	1,950	1,720	1,490	1,260	1,030	800	339
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	121						
2.0	385	161					
2.5	649	425	202				
3.0	913	689	466	242			
3.5	1,177	954	730	506	282		
4.0	1,441	1,218	994	770	546	323	
5.0	1,969	1,746	1,522	1,298	1,075	851	403
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	156						
2.0	420	208					
2.5	684	473	261				
3.0	949	737	525	313			
3.5	1,213	1,001	789	577	365		
4.0	1,477	1,265	1,053	841	629	417	
5.0	2,005	1,793	1,581	1,369	1,157	945	521

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	188						
2.0	452	251					
2.5	716	515	314				
3.0	980	779	578	376			
3.5	1,244	1,043	842	640	439		
4.0	1,508	1,307	1,106	904	703	502	
5.0	2,036	1,835	1,634	1,432	1,231	1,030	627
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	203						
2.0	467	270					
2.5	731	535	338				
3.0	995	799	602	406			
3.5	1,259	1,063	866	670	473		
4.0	1,523	1,327	1,130	934	737	541	
5.0	2,051	1,855	1,658	1,462	1,266	1,069	676
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	217						
2.0	481	289					
2.5	745	553	361				
3.0	1,009	817	626	434			
3.5	1,273	1,081	890	698	506		
4.0	1,537	1,345	1,154	962	770	578	
5.0	2,065	1,874	1,682	1,490	1,298	1,107	723

Table 2-142: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	272						
2.0	593	363					
2.5	914	684	454				
3.0	1,235	1,005	775	545			
3.5	1,556	1,326	1,096	865	635		
4.0	1,877	1,646	1,416	1,186	956	726	
5.0	2,518	2,288	2,058	1,828	1,598	1,368	908
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	291						
2.0	612	389					
2.5	933	709	486				
3.0	1,254	1,030	807	583			
3.5	1,575	1,351	1,127	904	680		
4.0	1,896	1,672	1,448	1,225	1,001	777	
5.0	2,537	2,314	2,090	1,866	1,643	1,419	971
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	327						
2.0	648	436					
2.5	968	757	545				
3.0	1,289	1,077	865	654			
3.5	1,610	1,398	1,186	974	762		
4.0	1,931	1,719	1,507	1,295	1,083	871	
5.0	2,573	2,361	2,149	1,937	1,725	1,513	1,089

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	359						
2.0	679	478					
2.5	1,000	799	598				
3.0	1,321	1,120	918	717			
3.5	1,642	1,441	1,239	1,038	837		
4.0	1,963	1,762	1,560	1,359	1,158	956	
5.0	2,605	2,403	2,202	2,001	1,799	1,598	1,195
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	373						
2.0	694	498					
2.5	1,015	819	622				
3.0	1,336	1,139	943	747			
3.5	1,657	1,460	1,264	1,067	871		
4.0	1,978	1,781	1,585	1,388	1,192	995	
5.0	2,619	2,423	2,226	2,030	1,834	1,637	1,244
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	387						
2.0	708	516					
2.5	1,029	837	646				
3.0	1,350	1,158	966	775			
3.5	1,671	1,479	1,287	1,096	904		
4.0	1,992	1,800	1,608	1,416	1,225	1,033	
5.0	2,633	2,442	2,250	2,058	1,866	1,675	1,291

Climate Zone 5: West Region El Paso Weather Data

Table 2-143: Energy Savings (Heating kWh) for 7.7 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	241						
2.0	867	322					
2.5	1,493	948	402				
3.0	2,119	1,574	1,028	483			
3.5	2,745	2,200	1,654	1,109	563		
4.0	3,371	2,826	2,280	1,735	1,189	644	
5.0	4,623	4,078	3,532	2,987	2,441	1,896	805
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	287						
2.0	913	383					
2.5	1,539	1,009	478				
3.0	2,165	1,634	1,104	574			
3.5	2,791	2,260	1,730	1,200	669		
4.0	3,417	2,886	2,356	1,826	1,295	765	
5.0	4,669	4,138	3,608	3,078	2,547	2,017	956
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	371						
2.0	997	494					
2.5	1,623	1,120	618				
3.0	2,249	1,746	1,244	741			
3.5	2,875	2,372	1,870	1,367	865		
4.0	3,501	2,998	2,496	1,993	1,491	988	
5.0	4,752	4,250	3,748	3,245	2,743	2,240	1,235

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	446						
2.0	1,072	595					
2.5	1,698	1,221	743				
3.0	2,324	1,847	1,369	892			
3.5	2,950	2,473	1,995	1,518	1,041		
4.0	3,576	3,099	2,621	2,144	1,667	1,189	
5.0	4,828	4,351	3,873	3,396	2,919	2,441	1,487
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	481						
2.0	1,107	641					
2.5	1,733	1,267	802				
3.0	2,359	1,893	1,428	962			
3.5	2,985	2,519	2,054	1,588	1,122		
4.0	3,611	3,145	2,679	2,214	1,748	1,282	
5.0	4,863	4,397	3,931	3,466	3,000	2,534	1,603
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	514						
2.0	1,140	686					
2.5	1,766	1,312	857				
3.0	2,392	1,938	1,483	1,028			
3.5	3,018	2,564	2,109	1,654	1,200		
4.0	3,644	3,190	2,735	2,280	1,826	1,371	
5.0	4,896	4,441	3,987	3,532	3,078	2,623	1,714

Table 2-144: Energy Savings (Heating kWh) for 6.8 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	645						
2.0	1,406	861					
2.5	2,167	1,621	1,076				
3.0	2,927	2,382	1,836	1,291			
3.5	3,688	3,143	2,597	2,052	1,506		
4.0	4,449	3,903	3,358	2,812	2,267	1,721	
5.0	5,970	5,425	4,879	4,334	3,788	3,243	2,152
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	691						
2.0	1,452	921					
2.5	2,212	1,682	1,152				
3.0	2,973	2,443	1,912	1,382			
3.5	3,734	3,203	2,673	2,142	1,612		
4.0	4,494	3,964	3,433	2,903	2,373	1,842	
5.0	6,015	5,485	4,955	4,424	3,894	3,364	2,303
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	775						
2.0	1,535	1,033					
2.5	2,296	1,794	1,291				
3.0	3,057	2,554	2,052	1,549			
3.5	3,817	3,315	2,812	2,310	1,808		
4.0	4,578	4,075	3,573	3,071	2,568	2,066	
5.0	6,099	5,597	5,094	4,592	4,089	3,587	2,582

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	850						
2.0	1,611	1,133					
2.5	2,371	1,894	1,417				
3.0	3,132	2,655	2,177	1,700			
3.5	3,893	3,415	2,938	2,461	1,983		
4.0	4,653	4,176	3,699	3,221	2,744	2,267	
5.0	6,175	5,697	5,220	4,743	4,265	3,788	2,833
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	885						
2.0	1,646	1,180					
2.5	2,406	1,941	1,475				
3.0	3,167	2,701	2,236	1,770			
3.5	3,928	3,462	2,996	2,531	2,065		
4.0	4,688	4,223	3,757	3,291	2,826	2,360	
5.0	6,209	5,744	5,278	4,812	4,347	3,881	2,950
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	918						
2.0	1,679	1,224					
2.5	2,440	1,985	1,530				
3.0	3,200	2,746	2,291	1,836			
3.5	3,961	3,506	3,052	2,597	2,142		
4.0	4,721	4,267	3,812	3,358	2,903	2,449	
5.0	6,243	5,788	5,334	4,879	4,424	3,970	3,061

Heating, Early Retirement—Replacement of an Electric Resistance Furnace

See Table 2-145 through Table 2-149 for the energy savings (kWh) per heating load type associated with a central heat pump replacing an electric resistance furnace for all five Texas climate zones.

Deemed Summer Demand Savings Tables

Heat pumps 17 SEER or greater are assumed to be two-stage heat pumps, while those under 17 SEER are assumed to be single-stage heat pumps. This results in slightly lower summer demand savings for 17.0-17.9 SEER heat pumps as compared to 16.0-16.9 SEER units.

New Construction

Table 2-145 through Table 2-149 present the summer demand savings (kW) associated with a central heat pump being installed during new construction for all 5 Texas climate zones.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-145: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 1

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9*	18.0–20.9	21.0+
1.5	0.06	0.12	0.22	0.16	0.24	0.35
2.0	0.08	0.16	0.29	0.21	0.31	0.47
2.5	0.10	0.19	0.36	0.27	0.39	0.59
3.0	0.12	0.23	0.43	0.32	0.47	0.71
3.5	0.14	0.27	0.50	0.37	0.55	0.82
4.0	0.16	0.31	0.58	0.42	0.63	0.94
5.0	0.20	0.39	0.72	0.53	0.79	1.18

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-146: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 2

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9*	18.0–20.9	21.0+
1.5	0.06	0.12	0.23	0.18	0.26	0.38
2.0	0.09	0.16	0.31	0.24	0.34	0.50
2.5	0.11	0.21	0.38	0.30	0.43	0.63
3.0	0.13	0.25	0.46	0.35	0.52	0.76
3.5	0.15	0.29	0.53	0.41	0.60	0.88
4.0	0.17	0.33	0.61	0.47	0.69	1.01
5.0	0.21	0.41	0.76	0.59	0.86	1.26

Climate Zone 3: South Region, Houston Weather Data

Table 2-147: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 3

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9*	18.0–20.9	21.0+
1.5	0.06	0.12	0.22	0.15	0.23	0.35
2.0	0.08	0.16	0.30	0.21	0.31	0.46
2.5	0.10	0.20	0.37	0.26	0.39	0.58
3.0	0.12	0.24	0.45	0.31	0.47	0.69
3.5	0.15	0.28	0.52	0.36	0.55	0.81
4.0	0.17	0.32	0.59	0.41	0.62	0.92
5.0	0.21	0.40	0.74	0.51	0.78	1.16

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-148: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 4

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9*	18.0–20.9	21.0+
1.5	0.05	0.09	0.17	0.22	0.28	0.40
2.0	0.06	0.12	0.23	0.30	0.37	0.53
2.5	0.08	0.16	0.29	0.37	0.46	0.66
3.0	0.10	0.19	0.35	0.45	0.56	0.80
3.5	0.11	0.22	0.41	0.52	0.65	0.93
4.0	0.13	0.25	0.46	0.60	0.74	1.06
5.0	0.16	0.31	0.58	0.75	0.93	1.33

Climate Zone 5: West Region El Paso Weather Data

Table 2-149: Summer Demand Savings for 14.0 SEER New Construction Baseline—Zone 5

Size (tons)	SEER Range					
	14.5–14.9	15.0–15.9	16.0–16.9	17.0–17.9*	18.0–20.9	21.0+
1.5	0.06	0.11	0.21	0.19	0.26	0.39
2.0	0.08	0.15	0.28	0.25	0.35	0.52
2.5	0.10	0.19	0.35	0.31	0.43	0.65
3.0	0.12	0.23	0.42	0.38	0.52	0.78
3.5	0.14	0.27	0.49	0.44	0.61	0.90
4.0	0.16	0.30	0.57	0.50	0.70	1.03
5.0	0.20	0.38	0.71	0.63	0.87	1.29

Replace-on-Burnout

Table 2-150 through Table 2-154 present the summer demand savings (kW) associated with a central heat pump replacing on burnout an HVAC system for all 5 Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-150: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.71	0.22					
2.5	1.25	0.76	0.28				
3.0	1.79	1.30	0.82	0.33			
3.5	2.33	1.84	1.36	0.87	0.39		
4.0	2.87	2.38	1.90	1.41	0.93	0.45	
5.0	3.94	3.46	2.98	2.49	2.01	1.52	0.56
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.76	0.30					
2.5	1.30	0.84	0.37				
3.0	1.84	1.38	0.91	0.45			
3.5	2.38	1.92	1.45	0.99	0.52		
4.0	2.92	2.46	1.99	1.52	1.06	0.59	
5.0	4.00	3.53	3.07	2.60	2.14	1.67	0.74

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.86	0.43					
2.5	1.40	0.97	0.54				
3.0	1.94	1.51	1.08	0.64			
3.5	2.48	2.05	1.62	1.18	0.75		
4.0	3.02	2.59	2.16	1.72	1.29	0.86	
5.0	4.10	3.67	3.24	2.80	2.37	1.94	1.07
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.81	0.35					
2.5	1.34	0.89	0.44				
3.0	1.88	1.43	0.98	0.53			
3.5	2.42	1.97	1.52	1.07	0.62		
4.0	2.96	2.51	2.06	1.61	1.16	0.71	
5.0	4.04	3.59	3.14	2.69	2.24	1.79	0.88
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.88	0.46					
2.5	1.42	1.00	0.57				
3.0	1.96	1.54	1.11	0.68			
3.5	2.50	2.08	1.65	1.22	0.80		
4.0	3.04	2.61	2.19	1.76	1.34	0.91	
5.0	4.12	3.69	3.27	2.84	2.42	1.99	1.14

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.00	0.61					
2.5	1.54	1.15	0.76				
3.0	2.08	1.69	1.30	0.92			
3.5	2.62	2.23	1.84	1.46	1.07		
4.0	3.16	2.77	2.38	2.00	1.61	1.22	
5.0	4.24	3.85	3.46	3.08	2.69	2.30	1.53

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-151: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.18						
2.0	0.75	0.24					
2.5	1.32	0.81	0.29				
3.0	1.89	1.38	0.87	0.35			
3.5	2.47	1.95	1.44	0.93	0.41		
4.0	3.04	2.53	2.01	1.50	0.99	0.47	
5.0	4.18	3.67	3.16	2.64	2.13	1.62	0.59
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.24						
2.0	0.81	0.31					
2.5	1.38	0.89	0.39				
3.0	1.95	1.46	0.97	0.47			
3.5	2.53	2.03	1.54	1.04	0.55		
4.0	3.10	2.60	2.11	1.62	1.12	0.63	
5.0	4.24	3.75	3.26	2.76	2.27	1.77	0.79

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.91	0.46					
2.5	1.49	1.03	0.57				
3.0	2.06	1.60	1.14	0.68			
3.5	2.63	2.17	1.71	1.26	0.80		
4.0	3.20	2.75	2.29	1.83	1.37	0.91	
5.0	4.35	3.89	3.43	2.97	2.52	2.06	1.14
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.86	0.39					
2.5	1.43	0.96	0.48				
3.0	2.01	1.53	1.06	0.58			
3.5	2.58	2.10	1.63	1.15	0.68		
4.0	3.15	2.68	2.20	1.72	1.25	0.77	
5.0	4.30	3.82	3.34	2.87	2.39	1.92	0.97
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.94	0.49					
2.5	1.52	1.07	0.62				
3.0	2.09	1.64	1.19	0.74			
3.5	2.66	2.21	1.76	1.31	0.87		
4.0	3.23	2.78	2.34	1.89	1.44	0.99	
5.0	4.38	3.93	3.48	3.03	2.58	2.13	1.24

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.49						
2.0	1.06	0.66					
2.5	1.64	1.23	0.82				
3.0	2.21	1.80	1.39	0.98			
3.5	2.78	2.37	1.96	1.55	1.15		
4.0	3.35	2.94	2.54	2.13	1.72	1.31	
5.0	4.50	4.09	3.68	3.27	2.86	2.45	1.64

Climate Zone 3: South Region, Houston Weather Data

Table 2-152: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.73	0.23					
2.5	1.28	0.79	0.29				
3.0	1.84	1.34	0.84	0.34			
3.5	2.40	1.90	1.40	0.90	0.40		
4.0	2.95	2.45	1.96	1.46	0.96	0.46	
5.0	4.07	3.57	3.07	2.57	2.07	1.57	0.57
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.23						
2.0	0.79	0.31					
2.5	1.34	0.86	0.38				
3.0	1.90	1.42	0.94	0.46			
3.5	2.46	1.98	1.50	1.02	0.54		
4.0	3.01	2.53	2.05	1.57	1.09	0.61	
5.0	4.12	3.64	3.16	2.68	2.20	1.73	0.77

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	0.89	0.44					
2.5	1.45	1.00	0.55				
3.0	2.00	1.56	1.11	0.66			
3.5	2.56	2.11	1.67	1.22	0.78		
4.0	3.11	2.67	2.22	1.78	1.33	0.89	
5.0	4.23	3.78	3.34	2.89	2.44	2.00	1.11
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.82	0.35					
2.5	1.38	0.91	0.44				
3.0	1.93	1.46	1.00	0.53			
3.5	2.49	2.02	1.55	1.08	0.62		
4.0	3.05	2.58	2.11	1.64	1.17	0.70	
5.0	4.16	3.69	3.22	2.75	2.28	1.82	0.88
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.90	0.46					
2.5	1.46	1.01	0.57				
3.0	2.01	1.57	1.13	0.69			
3.5	2.57	2.13	1.69	1.24	0.80		
4.0	3.13	2.68	2.24	1.80	1.36	0.92	
5.0	4.24	3.80	3.36	2.91	2.47	2.03	1.15

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.01	0.61					
2.5	1.57	1.17	0.76				
3.0	2.13	1.72	1.32	0.91			
3.5	2.68	2.28	1.87	1.47	1.07		
4.0	3.24	2.83	2.43	2.03	1.62	1.22	
5.0	4.35	3.95	3.54	3.14	2.73	2.33	1.52

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-153: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.13						
2.0	0.57	0.18					
2.5	1.00	0.61	0.22				
3.0	1.44	1.05	0.66	0.27			
3.5	1.87	1.48	1.09	0.70	0.31		
4.0	2.31	1.92	1.53	1.14	0.75	0.36	
5.0	3.18	2.79	2.40	2.01	1.62	1.23	0.45
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.18						
2.0	0.61	0.24					
2.5	1.05	0.67	0.30				
3.0	1.48	1.11	0.73	0.36			
3.5	1.92	1.54	1.17	0.79	0.42		
4.0	2.35	1.98	1.60	1.23	0.85	0.48	
5.0	3.22	2.85	2.47	2.10	1.72	1.35	0.60

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.69	0.35					
2.5	1.13	0.78	0.43				
3.0	1.56	1.22	0.87	0.52			
3.5	2.00	1.65	1.30	0.95	0.61		
4.0	2.43	2.09	1.74	1.39	1.04	0.69	
5.0	3.30	2.96	2.61	2.26	1.91	1.56	0.87
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.74	0.41					
2.5	1.18	0.85	0.52				
3.0	1.61	1.28	0.95	0.62			
3.5	2.05	1.72	1.39	1.05	0.72		
4.0	2.48	2.15	1.82	1.49	1.16	0.83	
5.0	3.35	3.02	2.69	2.36	2.03	1.70	1.03
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.36						
2.0	0.80	0.48					
2.5	1.23	0.92	0.61				
3.0	1.67	1.35	1.04	0.73			
3.5	2.10	1.79	1.48	1.16	0.85		
4.0	2.54	2.22	1.91	1.60	1.28	0.97	
5.0	3.41	3.09	2.78	2.47	2.15	1.84	1.21

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.48						
2.0	0.92	0.65					
2.5	1.35	1.08	0.81				
3.0	1.79	1.52	1.24	0.97			
3.5	2.22	1.95	1.68	1.40	1.13		
4.0	2.66	2.38	2.11	1.84	1.56	1.29	
5.0	3.53	3.25	2.98	2.71	2.43	2.16	1.61

Climate Zone 5: West Region El Paso Weather Data

Table 2-154: Summer Demand Savings for 13.08 SEER Replace-on-Burnout Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.16						
2.0	0.69	0.22					
2.5	1.22	0.75	0.27				
3.0	1.75	1.28	0.80	0.33			
3.5	2.28	1.81	1.33	0.86	0.38		
4.0	2.81	2.34	1.86	1.39	0.91	0.44	
5.0	3.87	3.40	2.92	2.45	1.97	1.50	0.55
15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.75	0.29					
2.5	1.28	0.82	0.36				
3.0	1.81	1.35	0.89	0.44			
3.5	2.34	1.88	1.42	0.97	0.51		
4.0	2.87	2.41	1.95	1.50	1.04	0.58	
5.0	3.93	3.47	3.01	2.56	2.10	1.64	0.73

16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.85	0.42					
2.5	1.38	0.95	0.53				
3.0	1.90	1.48	1.06	0.63			
3.5	2.43	2.01	1.59	1.16	0.74		
4.0	2.96	2.54	2.12	1.69	1.27	0.84	
5.0	4.02	3.60	3.17	2.75	2.33	1.90	1.05
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.82	0.39					
2.5	1.35	0.92	0.49				
3.0	1.88	1.45	1.02	0.59			
3.5	2.41	1.98	1.55	1.12	0.68		
4.0	2.94	2.51	2.08	1.65	1.21	0.78	
5.0	4.00	3.57	3.14	2.70	2.27	1.84	0.98
18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.89	0.49					
2.5	1.42	1.02	0.61				
3.0	1.95	1.55	1.14	0.73			
3.5	2.48	2.08	1.67	1.26	0.85		
4.0	3.01	2.61	2.20	1.79	1.38	0.97	
5.0	4.07	3.66	3.26	2.85	2.44	2.03	1.22

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.49						
2.0	1.02	0.66					
2.5	1.55	1.19	0.82				
3.0	2.08	1.72	1.35	0.98			
3.5	2.61	2.24	1.88	1.51	1.15		
4.0	3.14	2.77	2.41	2.04	1.68	1.31	
5.0	4.20	3.83	3.47	3.10	2.74	2.37	1.64

Early Retirement

Table 2-156 through Table 2-164 present the summer demand savings (kW) associated with a central heat pump replacing an HVAC system for all five Texas climate zones. These savings can be used with the replace-on-burnout energy savings in Table 2-150 through Table 2-154 to calculate summer demand savings. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-155: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.82	0.33					
2.5	1.39	0.90	0.42				
3.0	1.95	1.47	0.98	0.50			
3.5	2.52	2.04	1.55	1.07	0.58		
4.0	3.09	2.60	2.12	1.64	1.15	0.67	
5.0	4.22	3.74	3.25	2.77	2.29	1.80	0.83

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.87	0.41					
2.5	1.44	0.98	0.51				
3.0	2.01	1.54	1.08	0.61			
3.5	2.58	2.11	1.64	1.18	0.71		
4.0	3.14	2.68	2.21	1.75	1.28	0.82	
5.0	4.28	3.81	3.35	2.88	2.42	1.95	1.02
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.41						
2.0	0.97	0.54					
2.5	1.54	1.11	0.68				
3.0	2.11	1.68	1.24	0.81			
3.5	2.68	2.24	1.81	1.38	0.95		
4.0	3.24	2.81	2.38	1.95	1.51	1.08	
5.0	4.38	3.95	3.51	3.08	2.65	2.22	1.35
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.92	0.46					
2.5	1.48	1.03	0.58				
3.0	2.05	1.60	1.15	0.70			
3.5	2.62	2.17	1.72	1.26	0.81		
4.0	3.19	2.73	2.28	1.83	1.38	0.93	
5.0	4.32	3.87	3.42	2.97	2.52	2.06	1.16

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	0.99	0.57					
2.5	1.56	1.13	0.71				
3.0	2.13	1.70	1.28	0.85			
3.5	2.70	2.27	1.84	1.42	0.99		
4.0	3.26	2.84	2.41	1.99	1.56	1.13	
5.0	4.40	3.97	3.55	3.12	2.69	2.27	1.42

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.11	0.72					
2.5	1.68	1.29	0.90				
3.0	2.24	1.86	1.47	1.08			
3.5	2.81	2.43	2.04	1.65	1.27		
4.0	3.38	2.99	2.61	2.22	1.83	1.45	
5.0	4.51	4.13	3.74	3.35	2.97	2.58	1.81

Table 2-156: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 1

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.67						
2.0	1.37	0.89					
2.5	2.08	1.59	1.11				
3.0	2.78	2.30	1.82	1.33			
3.5	3.49	3.00	2.52	2.04	1.55		
4.0	4.19	3.71	3.23	2.74	2.26	1.77	
5.0	5.61	5.12	4.64	4.15	3.67	3.19	2.22

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.72						
2.0	1.43	0.96					
2.5	2.13	1.67	1.20				
3.0	2.84	2.37	1.91	1.44			
3.5	3.54	3.08	2.61	2.15	1.68		
4.0	4.25	3.79	3.32	2.85	2.39	1.92	
5.0	5.66	5.20	4.73	4.27	3.80	3.34	2.40
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.82						
2.0	1.53	1.09					
2.5	2.23	1.80	1.37				
3.0	2.94	2.51	2.07	1.64			
3.5	3.64	3.21	2.78	2.35	1.92		
4.0	4.35	3.92	3.49	3.05	2.62	2.19	
5.0	5.76	5.33	4.90	4.47	4.03	3.60	2.74
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.76						
2.0	1.47	1.02					
2.5	2.18	1.72	1.27				
3.0	2.88	2.43	1.98	1.53			
3.5	3.59	3.14	2.69	2.23	1.78		
4.0	4.29	3.84	3.39	2.94	2.49	2.04	
5.0	5.71	5.25	4.80	4.35	3.90	3.45	2.55

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.84						
2.0	1.55	1.12					
2.5	2.25	1.83	1.40				
3.0	2.96	2.53	2.11	1.68			
3.5	3.66	3.24	2.81	2.39	1.96		
4.0	4.37	3.94	3.52	3.09	2.67	2.24	
5.0	5.78	5.36	4.93	4.50	4.08	3.65	2.80

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.96						
2.0	1.66	1.28					
2.5	2.37	1.98	1.60				
3.0	3.08	2.69	2.30	1.92			
3.5	3.78	3.39	3.01	2.62	2.23		
4.0	4.49	4.10	3.71	3.33	2.94	2.55	
5.0	5.90	5.51	5.13	4.74	4.35	3.97	3.19

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-157: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.87	0.35					
2.5	1.47	0.96	0.44				
3.0	2.07	1.56	1.04	0.53			
3.5	2.67	2.16	1.65	1.13	0.62		
4.0	3.27	2.76	2.25	1.73	1.22	0.71	
5.0	4.48	3.96	3.45	2.94	2.42	1.91	0.88

15-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.93	0.43					
2.5	1.53	1.03	0.54				
3.0	2.13	1.64	1.14	0.65			
3.5	2.73	2.24	1.74	1.25	0.76		
4.0	3.33	2.84	2.35	1.85	1.36	0.87	
5.0	4.54	4.04	3.55	3.06	2.56	2.07	1.08
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	1.03	0.57					
2.5	1.63	1.18	0.72				
3.0	2.24	1.78	1.32	0.86			
3.5	2.84	2.38	1.92	1.46	1.00		
4.0	3.44	2.98	2.52	2.06	1.61	1.15	
5.0	4.64	4.18	3.73	3.27	2.81	2.35	1.43
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.38						
2.0	0.98	0.50					
2.5	1.58	1.11	0.63				
3.0	2.18	1.71	1.23	0.76			
3.5	2.79	2.31	1.83	1.36	0.88		
4.0	3.39	2.91	2.44	1.96	1.48	1.01	
5.0	4.59	4.11	3.64	3.16	2.69	2.21	1.26

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.46						
2.0	1.06	0.61					
2.5	1.66	1.21	0.77				
3.0	2.26	1.82	1.37	0.92			
3.5	2.87	2.42	1.97	1.52	1.07		
4.0	3.47	3.02	2.57	2.12	1.67	1.22	
5.0	4.67	4.22	3.77	3.33	2.88	2.43	1.53

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.58						
2.0	1.18	0.77					
2.5	1.78	1.37	0.97				
3.0	2.38	1.98	1.57	1.16			
3.5	2.99	2.58	2.17	1.76	1.35		
4.0	3.59	3.18	2.77	2.36	1.95	1.55	
5.0	4.79	4.38	3.97	3.57	3.16	2.75	1.93

Table 2-158: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 2

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.45	0.94					
2.5	2.20	1.69	1.18				
3.0	2.95	2.44	1.93	1.41			
3.5	3.70	3.19	2.67	2.16	1.65		
4.0	4.45	3.94	3.42	2.91	2.40	1.88	
5.0	5.95	5.43	4.92	4.41	3.89	3.38	2.35

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.77						
2.0	1.51	1.02					
2.5	2.26	1.77	1.28				
3.0	3.01	2.52	2.02	1.53			
3.5	3.76	3.27	2.77	2.28	1.79		
4.0	4.51	4.01	3.52	3.03	2.53	2.04	
5.0	6.01	5.51	5.02	4.52	4.03	3.54	2.55
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.87						
2.0	1.62	1.16					
2.5	2.37	1.91	1.45				
3.0	3.12	2.66	2.20	1.74			
3.5	3.87	3.41	2.95	2.49	2.03		
4.0	4.61	4.16	3.70	3.24	2.78	2.32	
5.0	6.11	5.65	5.19	4.74	4.28	3.82	2.90
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.82						
2.0	1.57	1.09					
2.5	2.32	1.84	1.36				
3.0	3.06	2.59	2.11	1.64			
3.5	3.81	3.34	2.86	2.39	1.91		
4.0	4.56	4.09	3.61	3.13	2.66	2.18	
5.0	6.06	5.58	5.11	4.63	4.16	3.68	2.73

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.90						
2.0	1.65	1.20					
2.5	2.40	1.95	1.50				
3.0	3.15	2.70	2.25	1.80			
3.5	3.89	3.45	3.00	2.55	2.10		
4.0	4.64	4.19	3.75	3.30	2.85	2.40	
5.0	6.14	5.69	5.24	4.79	4.35	3.90	3.00

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.02						
2.0	1.77	1.36					
2.5	2.52	2.11	1.70				
3.0	3.27	2.86	2.45	2.04			
3.5	4.01	3.61	3.20	2.79	2.38		
4.0	4.76	4.35	3.95	3.54	3.13	2.72	
5.0	6.26	5.85	5.44	5.03	4.63	4.22	3.40

Climate Zone 3: South Region, Houston Weather Data

Table 2-159: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.84	0.34					
2.5	1.43	0.93	0.43				
3.0	2.01	1.51	1.01	0.52			
3.5	2.60	2.10	1.60	1.10	0.60		
4.0	3.18	2.68	2.18	1.69	1.19	0.69	
5.0	4.35	3.85	3.35	2.86	2.36	1.86	0.86

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.32						
2.0	0.90	0.42					
2.5	1.49	1.01	0.53				
3.0	2.07	1.59	1.11	0.63			
3.5	2.66	2.18	1.70	1.22	0.74		
4.0	3.24	2.76	2.28	1.80	1.32	0.84	
5.0	4.41	3.93	3.45	2.97	2.49	2.01	1.05
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.42						
2.0	1.00	0.56					
2.5	1.59	1.14	0.70				
3.0	2.17	1.73	1.28	0.84			
3.5	2.76	2.31	1.87	1.42	0.98		
4.0	3.34	2.90	2.45	2.01	1.56	1.12	
5.0	4.51	4.07	3.62	3.18	2.73	2.29	1.39
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.93	0.47					
2.5	1.52	1.05	0.58				
3.0	2.10	1.64	1.17	0.70			
3.5	2.69	2.22	1.75	1.28	0.82		
4.0	3.27	2.81	2.34	1.87	1.40	0.93	
5.0	4.44	3.98	3.51	3.04	2.57	2.10	1.17

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	1.01	0.57					
2.5	1.60	1.16	0.72				
3.0	2.18	1.74	1.30	0.86			
3.5	2.77	2.33	1.89	1.44	1.00		
4.0	3.35	2.91	2.47	2.03	1.59	1.15	
5.0	4.52	4.08	3.64	3.20	2.76	2.32	1.43

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.13	0.72					
2.5	1.71	1.31	0.90				
3.0	2.30	1.89	1.49	1.08			
3.5	2.88	2.48	2.07	1.67	1.27		
4.0	3.47	3.06	2.66	2.25	1.85	1.45	
5.0	4.64	4.23	3.83	3.42	3.02	2.62	1.81

Table 2-160: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 3

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.69						
2.0	1.41	0.91					
2.5	2.14	1.64	1.14				
3.0	2.87	2.37	1.87	1.37			
3.5	3.60	3.10	2.60	2.10	1.60		
4.0	4.32	3.83	3.33	2.83	2.33	1.83	
5.0	5.78	5.28	4.78	4.28	3.78	3.29	2.29

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.74						
2.0	1.47	0.99					
2.5	2.20	1.72	1.24				
3.0	2.93	2.45	1.97	1.49			
3.5	3.65	3.17	2.69	2.22	1.74		
4.0	4.38	3.90	3.42	2.94	2.46	1.98	
5.0	5.84	5.36	4.88	4.40	3.92	3.44	2.48
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.85						
2.0	1.57	1.13					
2.5	2.30	1.86	1.41				
3.0	3.03	2.58	2.14	1.69			
3.5	3.76	3.31	2.87	2.42	1.98		
4.0	4.49	4.04	3.59	3.15	2.70	2.26	
5.0	5.94	5.50	5.05	4.60	4.16	3.71	2.82
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.78						
2.0	1.51	1.04					
2.5	2.23	1.76	1.30				
3.0	2.96	2.49	2.02	1.56			
3.5	3.69	3.22	2.75	2.28	1.81		
4.0	4.42	3.95	3.48	3.01	2.54	2.07	
5.0	5.87	5.40	4.93	4.47	4.00	3.53	2.59

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.86						
2.0	1.59	1.14					
2.5	2.31	1.87	1.43				
3.0	3.04	2.60	2.16	1.72			
3.5	3.77	3.33	2.89	2.44	2.00		
4.0	4.50	4.05	3.61	3.17	2.73	2.29	
5.0	5.95	5.51	5.07	4.63	4.19	3.74	2.86

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.97						
2.0	1.70	1.29					
2.5	2.43	2.02	1.62				
3.0	3.15	2.75	2.35	1.94			
3.5	3.88	3.48	3.07	2.67	2.26		
4.0	4.61	4.21	3.80	3.40	2.99	2.59	
5.0	6.06	5.66	5.26	4.85	4.45	4.04	3.24

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-161: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.66	0.27					
2.5	1.12	0.73	0.34				
3.0	1.57	1.18	0.79	0.40			
3.5	2.03	1.64	1.25	0.86	0.47		
4.0	2.49	2.10	1.71	1.32	0.93	0.54	
5.0	3.40	3.01	2.62	2.23	1.84	1.45	0.67

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.70	0.33					
2.5	1.16	0.79	0.41				
3.0	1.62	1.24	0.87	0.49			
3.5	2.08	1.70	1.33	0.95	0.58		
4.0	2.53	2.16	1.78	1.41	1.03	0.66	
5.0	3.45	3.07	2.70	2.32	1.95	1.57	0.82
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	0.78	0.44					
2.5	1.24	0.89	0.54				
3.0	1.70	1.35	1.00	0.65			
3.5	2.16	1.81	1.46	1.11	0.76		
4.0	2.61	2.26	1.92	1.57	1.22	0.87	
5.0	3.53	3.18	2.83	2.48	2.13	1.79	1.09
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.38						
2.0	0.83	0.50					
2.5	1.29	0.96	0.63				
3.0	1.75	1.42	1.09	0.75			
3.5	2.21	1.87	1.54	1.21	0.88		
4.0	2.66	2.33	2.00	1.67	1.34	1.01	
5.0	3.58	3.25	2.91	2.58	2.25	1.92	1.26

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.43						
2.0	0.89	0.57					
2.5	1.34	1.03	0.72				
3.0	1.80	1.49	1.17	0.86			
3.5	2.26	1.95	1.63	1.32	1.00		
4.0	2.72	2.40	2.09	1.78	1.46	1.15	
5.0	3.63	3.32	3.00	2.69	2.38	2.06	1.44

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.55						
2.0	1.01	0.74					
2.5	1.47	1.19	0.92				
3.0	1.92	1.65	1.38	1.10			
3.5	2.38	2.11	1.83	1.56	1.29		
4.0	2.84	2.56	2.29	2.02	1.74	1.47	
5.0	3.75	3.48	3.20	2.93	2.66	2.38	1.84

Table 2-162: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 4

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.10	0.71					
2.5	1.67	1.28	0.89				
3.0	2.24	1.85	1.46	1.07			
3.5	2.81	2.42	2.03	1.64	1.25		
4.0	3.38	2.99	2.60	2.21	1.82	1.43	
5.0	4.52	4.13	3.74	3.35	2.96	2.57	1.79

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.58						
2.0	1.15	0.77					
2.5	1.72	1.34	0.97				
3.0	2.29	1.91	1.54	1.16			
3.5	2.86	2.48	2.11	1.73	1.36		
4.0	3.42	3.05	2.67	2.30	1.92	1.55	
5.0	4.56	4.19	3.81	3.44	3.06	2.69	1.94
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.66						
2.0	1.23	0.88					
2.5	1.80	1.45	1.10				
3.0	2.37	2.02	1.67	1.32			
3.5	2.94	2.59	2.24	1.89	1.54		
4.0	3.50	3.16	2.81	2.46	2.11	1.76	
5.0	4.64	4.29	3.95	3.60	3.25	2.90	2.21
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.28	0.95					
2.5	1.85	1.52	1.19				
3.0	2.42	2.09	1.75	1.42			
3.5	2.99	2.66	2.32	1.99	1.66		
4.0	3.56	3.22	2.89	2.56	2.23	1.90	
5.0	4.69	4.36	4.03	3.70	3.37	3.04	2.37

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.77						
2.0	1.33	1.02					
2.5	1.90	1.59	1.28				
3.0	2.47	2.16	1.84	1.53			
3.5	3.04	2.73	2.41	2.10	1.79		
4.0	3.61	3.29	2.98	2.67	2.35	2.04	
5.0	4.75	4.43	4.12	3.81	3.49	3.18	2.55

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.89						
2.0	1.45	1.18					
2.5	2.02	1.75	1.48				
3.0	2.59	2.32	2.05	1.77			
3.5	3.16	2.89	2.61	2.34	2.07		
4.0	3.73	3.46	3.18	2.91	2.64	2.36	
5.0	4.87	4.59	4.32	4.05	3.77	3.50	2.95

Climate Zone 5: West Region El Paso Weather Data

Table 2-163: Summer Demand Savings for 12.44 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.80	0.33					
2.5	1.36	0.88	0.41				
3.0	1.92	1.44	0.97	0.49			
3.5	2.47	2.00	1.52	1.05	0.57		
4.0	3.03	2.55	2.08	1.60	1.13	0.65	
5.0	4.14	3.67	3.19	2.72	2.24	1.77	0.82

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.30						
2.0	0.86	0.40					
2.5	1.41	0.96	0.50				
3.0	1.97	1.51	1.06	0.60			
3.5	2.53	2.07	1.61	1.16	0.70		
4.0	3.08	2.63	2.17	1.71	1.26	0.80	
5.0	4.20	3.74	3.28	2.83	2.37	1.91	1.00
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.40						
2.0	0.95	0.53					
2.5	1.51	1.09	0.66				
3.0	2.07	1.64	1.22	0.80			
3.5	2.63	2.20	1.78	1.35	0.93		
4.0	3.18	2.76	2.33	1.91	1.49	1.06	
5.0	4.30	3.87	3.45	3.02	2.60	2.18	1.33
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.37						
2.0	0.93	0.50					
2.5	1.49	1.06	0.62				
3.0	2.05	1.61	1.18	0.75			
3.5	2.60	2.17	1.74	1.31	0.87		
4.0	3.16	2.73	2.30	1.86	1.43	1.00	
5.0	4.27	3.84	3.41	2.98	2.55	2.11	1.25

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.45						
2.0	1.00	0.60					
2.5	1.56	1.15	0.75				
3.0	2.12	1.71	1.30	0.89			
3.5	2.67	2.27	1.86	1.45	1.04		
4.0	3.23	2.82	2.42	2.01	1.60	1.19	
5.0	4.34	3.94	3.53	3.12	2.71	2.31	1.49

21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.57						
2.0	1.13	0.77					
2.5	1.69	1.32	0.96				
3.0	2.24	1.88	1.51	1.15			
3.5	2.80	2.44	2.07	1.70	1.34		
4.0	3.36	2.99	2.63	2.26	1.90	1.53	
5.0	4.47	4.11	3.74	3.37	3.01	2.64	1.91

Table 2-164: Summer Demand Savings for 10.0 SEER Early Retirement Baseline—Zone 5

14.5-14.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.65						
2.0	1.35	0.87					
2.5	2.04	1.56	1.09				
3.0	2.73	2.26	1.78	1.31			
3.5	3.42	2.95	2.47	2.00	1.52		
4.0	4.12	3.64	3.17	2.69	2.22	1.74	
5.0	5.50	5.03	4.55	4.08	3.60	3.13	2.18

15.0-15.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.71						
2.0	1.40	0.94					
2.5	2.09	1.64	1.18				
3.0	2.79	2.33	1.87	1.42			
3.5	3.48	3.02	2.56	2.11	1.65		
4.0	4.17	3.71	3.26	2.80	2.34	1.89	
5.0	5.56	5.10	4.64	4.19	3.73	3.27	2.36
16.0-16.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.81						
2.0	1.50	1.07					
2.5	2.19	1.77	1.34				
3.0	2.88	2.46	2.04	1.61			
3.5	3.58	3.15	2.73	2.30	1.88		
4.0	4.27	3.84	3.42	3.00	2.57	2.15	
5.0	5.65	5.23	4.81	4.38	3.96	3.53	2.69
17.0-17.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.78						
2.0	1.48	1.04					
2.5	2.17	1.74	1.30				
3.0	2.86	2.43	2.00	1.56			
3.5	3.55	3.12	2.69	2.26	1.83		
4.0	4.25	3.81	3.38	2.95	2.52	2.09	
5.0	5.63	5.20	4.77	4.34	3.90	3.47	2.61

18.0-20.9 SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.85						
2.0	1.55	1.14					
2.5	2.24	1.83	1.42				
3.0	2.93	2.52	2.12	1.71			
3.5	3.62	3.22	2.81	2.40	1.99		
4.0	4.32	3.91	3.50	3.09	2.69	2.28	
5.0	5.70	5.30	4.89	4.48	4.07	3.66	2.85
21.0+ SEER							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.98						
2.0	1.67	1.31					
2.5	2.37	2.00	1.64				
3.0	3.06	2.69	2.33	1.96			
3.5	3.75	3.39	3.02	2.66	2.29		
4.0	4.44	4.08	3.71	3.35	2.98	2.62	
5.0	5.83	5.46	5.10	4.73	4.37	4.00	3.27

Deemed Winter Demand Savings Tables

New Construction or Replace-on-Burnout of a Heat Pump

Table 2-165 through Table 2-169 present the winter demand savings (kW) associated with a central heat pump being installed during new construction or replacing a burned-out central heat pump.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-165: Winter Demand Savings for 8.2 HSPF Baseline—Zone 1

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	0.05	0.08	0.14	0.19	0.22	0.24
2.0	0.07	0.11	0.19	0.26	0.29	0.32
2.5	0.09	0.14	0.24	0.32	0.36	0.40
3.0	0.10	0.17	0.28	0.39	0.44	0.48
3.5	0.12	0.19	0.33	0.45	0.51	0.56
4.0	0.14	0.22	0.38	0.52	0.58	0.64
5.0	0.17	0.28	0.47	0.64	0.73	0.80

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-166: Winter Demand Savings for 8.2 HSPF Baseline—Zone 2

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	0.05	0.08	0.14	0.19	0.22	0.24
2.0	0.07	0.11	0.19	0.26	0.29	0.32
2.5	0.09	0.14	0.24	0.32	0.36	0.40
3.0	0.10	0.17	0.28	0.39	0.44	0.48
3.5	0.12	0.19	0.33	0.45	0.51	0.57
4.0	0.14	0.22	0.38	0.52	0.58	0.65
5.0	0.17	0.28	0.47	0.65	0.73	0.81

Climate Zone 3: South Region, Houston Weather Data

Table 2-167: Winter Demand Savings for 8.2 HSPF Baseline—Zone 3

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	0.04	0.07	0.12	0.17	0.19	0.21
2.0	0.06	0.10	0.16	0.22	0.25	0.28
2.5	0.07	0.12	0.20	0.28	0.32	0.35
3.0	0.09	0.14	0.25	0.34	0.38	0.42
3.5	0.10	0.17	0.29	0.39	0.44	0.49
4.0	0.12	0.19	0.33	0.45	0.51	0.56
5.0	0.15	0.24	0.41	0.56	0.63	0.70

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-168: Winter Demand Savings for 8.2 HSPF Baseline—Zone 4

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	0.03	0.05	0.09	0.13	0.14	0.16
2.0	0.04	0.07	0.12	0.17	0.19	0.21
2.5	0.06	0.09	0.15	0.21	0.24	0.26
3.0	0.07	0.11	0.18	0.25	0.28	0.31
3.5	0.08	0.13	0.21	0.29	0.33	0.37
4.0	0.09	0.14	0.25	0.34	0.38	0.42
5.0	0.11	0.18	0.31	0.42	0.47	0.52

Climate Zone 5: West Region El Paso Weather Data

Table 2-169: Winter Demand Savings for 8.2 HSPF Baseline—Zone 5

Size (tons)	HSPF Range					
	8.5	8.6—8.9	9.0—9.2	9.3—9.4	9.5—9.6	≥ 9.7
1.5	0.03	0.05	0.08	0.11	0.12	0.14
2.0	0.04	0.06	0.11	0.14	0.16	0.18
2.5	0.05	0.08	0.13	0.18	0.20	0.23
3.0	0.06	0.09	0.16	0.22	0.24	0.27
3.5	0.07	0.11	0.18	0.25	0.28	0.32
4.0	0.08	0.12	0.21	0.29	0.33	0.36
5.0	0.10	0.15	0.26	0.36	0.41	0.45

Replace-on-Burnout—Replacement of Electric Resistance Furnace

Table 2-170 through Table 2-174 present the winter demand savings (kW) per heating load type associated with a central heat pump replacing an electric resistance furnace for all five climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-170: Winter Demand Savings for 3.41 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.25						
2.0	3.60	3.00					
2.5	4.96	4.35	3.75				
3.0	6.32	5.71	5.10	4.49			
3.5	7.67	7.07	6.46	5.85	5.24		
4.0	9.03	8.42	7.82	7.21	6.60	5.99	
5.0	11.74	11.14	10.53	9.92	9.31	8.71	7.49
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.28						
2.0	3.64	3.04					
2.5	4.99	4.40	3.80				
3.0	6.35	5.75	5.15	4.56			
3.5	7.71	7.11	6.51	5.91	5.32		
4.0	9.06	8.47	7.87	7.27	6.67	6.08	
5.0	11.78	11.18	10.58	9.98	9.39	8.79	7.60
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.34						
2.0	3.69	3.12					
2.5	5.05	4.47	3.90				
3.0	6.41	5.83	5.25	4.67			
3.5	7.76	7.19	6.61	6.03	5.58		
4.0	9.12	8.54	7.97	7.39	6.93	6.23	
5.0	11.83	11.26	10.68	10.10	9.65	8.95	7.79

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.39						
2.0	3.75	3.19					
2.5	5.10	4.54	3.98				
3.0	6.46	5.90	5.34	4.78			
3.5	7.82	7.26	6.70	6.14	5.58		
4.0	9.17	8.61	8.05	7.49	6.93	6.37	
5.0	11.89	11.33	10.77	10.21	9.65	9.09	7.97
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.41						
2.0	3.77	3.22					
2.5	5.13	4.58	4.02				
3.0	6.48	5.93	5.38	4.83			
3.5	7.84	7.29	6.74	6.18	5.63		
4.0	9.20	8.65	8.09	7.54	6.99	6.44	
5.0	11.91	11.36	10.81	10.25	9.70	9.15	8.05
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.44						
2.0	3.79	3.25					
2.5	5.15	4.61	4.06				
3.0	6.51	5.96	5.42	4.87			
3.5	7.86	7.32	6.78	6.23	5.69		
4.0	9.22	8.68	8.13	7.59	7.04	6.50	
5.0	11.93	11.39	10.85	10.30	9.76	9.21	8.12

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-171: Winter Demand Savings for 3.41 HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.30						
2.0	3.63	3.07					
2.5	4.96	4.40	3.83				
3.0	6.29	5.72	5.16	4.60			
3.5	7.62	7.05	6.49	5.93	5.37		
4.0	8.94	8.38	7.82	7.26	6.69	6.13	
5.0	11.60	11.04	10.48	9.92	9.35	8.79	7.67
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.33						
2.0	3.66	3.11					
2.5	4.99	4.44	3.89				
3.0	6.32	5.77	5.21	4.66			
3.5	7.65	7.10	6.54	5.99	5.44		
4.0	8.98	8.42	7.87	7.32	6.77	6.22	
5.0	11.63	11.08	10.53	9.98	9.43	8.88	7.77
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.39						
2.0	3.72	3.19					
2.5	5.05	4.52	3.98				
3.0	6.38	5.84	5.31	4.78			
3.5	7.71	7.17	6.64	6.11	5.70		
4.0	9.04	8.50	7.97	7.44	7.03	6.37	
5.0	11.69	11.16	10.63	10.10	9.69	9.03	7.97

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.44						
2.0	3.77	3.26					
2.5	5.10	4.59	4.07				
3.0	6.43	5.92	5.40	4.89			
3.5	7.76	7.24	6.73	6.21	5.70		
4.0	9.09	8.57	8.06	7.54	7.03	6.51	
5.0	11.75	11.23	10.72	10.20	9.69	9.17	8.14
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.47						
2.0	3.80	3.29					
2.5	5.13	4.62	4.11				
3.0	6.45	5.95	5.44	4.93			
3.5	7.78	7.28	6.77	6.26	5.76		
4.0	9.11	8.61	8.10	7.59	7.09	6.58	
5.0	11.77	11.26	10.76	10.25	9.74	9.24	8.22
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.49						
2.0	3.82	3.32					
2.5	5.15	4.65	4.15				
3.0	6.48	5.98	5.48	4.98			
3.5	7.81	7.31	6.81	6.31	5.81		
4.0	9.14	8.64	8.14	7.64	7.14	6.64	
5.0	11.79	11.30	10.80	10.30	9.80	9.30	8.30

Climate Zone 3: South Region, Houston Weather Data

Table 2-172: Winter Demand Savings for 3.41 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.16						
2.0	3.22	2.89					
2.5	4.27	3.94	3.61				
3.0	5.32	4.99	4.66	4.33			
3.5	6.37	6.04	5.71	5.38	5.05		
4.0	7.43	7.09	6.76	6.43	6.10	5.77	
5.0	9.53	9.20	8.87	8.54	8.21	7.88	7.21
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.19						
2.0	3.24	2.92					
2.5	4.30	3.97	3.65				
3.0	5.35	5.03	4.71	4.38			
3.5	6.40	6.08	5.76	5.44	5.11		
4.0	7.45	7.13	6.81	6.49	6.17	5.85	
5.0	9.56	9.24	8.91	8.59	8.27	7.95	7.31
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.24						
2.0	3.29	2.99					
2.5	4.35	4.04	3.74				
3.0	5.40	5.09	4.79	4.49			
3.5	6.45	6.15	5.84	5.54	5.34		
4.0	7.50	7.20	6.89	6.59	6.39	5.98	
5.0	9.61	9.30	9.00	8.69	8.50	8.09	7.48

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.29						
2.0	3.34	3.05					
2.5	4.39	4.10	3.81				
3.0	5.45	5.16	4.87	4.58			
3.5	6.50	6.21	5.92	5.63	5.34		
4.0	7.55	7.26	6.97	6.68	6.39	6.10	
5.0	9.65	9.36	9.08	8.79	8.50	8.21	7.63
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.31						
2.0	3.36	3.08					
2.5	4.41	4.13	3.85				
3.0	5.47	5.18	4.90	4.62			
3.5	6.52	6.24	5.95	5.67	5.39		
4.0	7.57	7.29	7.01	6.72	6.44	6.16	
5.0	9.67	9.39	9.11	8.83	8.55	8.26	7.70
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	2.33						
2.0	3.38	3.11					
2.5	4.43	4.16	3.88				
3.0	5.49	5.21	4.94	4.66			
3.5	6.54	6.26	5.99	5.71	5.44		
4.0	7.59	7.32	7.04	6.76	6.49	6.21	
5.0	9.70	9.42	9.14	8.87	8.59	8.32	7.77

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-173: Winter Demand Savings for 3.41 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.66						
2.0	2.47	2.22					
2.5	3.27	3.02	2.77				
3.0	4.07	3.83	3.58	3.33			
3.5	4.88	4.63	4.38	4.13	3.88		
4.0	5.68	5.43	5.18	4.94	4.69	4.44	
5.0	7.29	7.04	6.79	6.54	6.29	6.04	5.55
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.69						
2.0	2.49	2.25					
2.5	3.29	3.05	2.81				
3.0	4.09	3.85	3.61	3.37			
3.5	4.90	4.66	4.41	4.17	3.93		
4.0	5.70	5.46	5.22	4.98	4.74	4.49	
5.0	7.31	7.06	6.82	6.58	6.34	6.10	5.62
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.72						
2.0	2.53	2.30					
2.5	3.33	3.10	2.87				
3.0	4.13	3.90	3.68	3.45			
3.5	4.94	4.71	4.48	4.25	4.10		
4.0	5.74	5.51	5.28	5.05	4.90	4.60	
5.0	7.34	7.12	6.89	6.66	6.51	6.20	5.74

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.76						
2.0	2.56	2.34					
2.5	3.36	3.15	2.93				
3.0	4.17	3.95	3.73	3.52			
3.5	4.97	4.75	4.54	4.32	4.10		
4.0	5.77	5.56	5.34	5.12	4.90	4.69	
5.0	7.38	7.16	6.94	6.73	6.51	6.29	5.86
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.77						
2.0	2.58	2.36					
2.5	3.38	3.17	2.96				
3.0	4.18	3.97	3.76	3.55			
3.5	4.99	4.77	4.56	4.35	4.14		
4.0	5.79	5.58	5.36	5.15	4.94	4.73	
5.0	7.39	7.18	6.97	6.76	6.55	6.34	5.91
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.79						
2.0	2.59	2.38					
2.5	3.39	3.19	2.98				
3.0	4.20	3.99	3.78	3.58			
3.5	5.00	4.79	4.59	4.38	4.17		
4.0	5.80	5.60	5.39	5.18	4.98	4.77	
5.0	7.41	7.20	7.00	6.79	6.58	6.38	5.96

Climate Zone 5: West Region El Paso Weather Data

Table 2-174: Winter Demand Savings for 3.41 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.44						
2.0	2.13	1.92					
2.5	2.82	2.61	2.40				
3.0	3.51	3.30	3.09	2.88			
3.5	4.21	3.99	3.78	3.57	3.35		
4.0	4.90	4.69	4.47	4.26	4.05	3.83	
5.0	6.28	6.07	5.86	5.64	5.43	5.22	4.79
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.46						
2.0	2.15	1.94					
2.5	2.84	2.63	2.43				
3.0	3.53	3.33	3.12	2.91			
3.5	4.22	4.02	3.81	3.60	3.40		
4.0	4.92	4.71	4.50	4.30	4.09	3.88	
5.0	6.30	6.09	5.89	5.68	5.47	5.27	4.85
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.49						
2.0	2.18	1.98					
2.5	2.87	2.68	2.48				
3.0	3.56	3.37	3.17	2.98			
3.5	4.26	4.06	3.86	3.67	3.54		
4.0	4.95	4.75	4.56	4.36	4.23	3.97	
5.0	6.33	6.14	5.94	5.75	5.62	5.35	4.96

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.52						
2.0	2.21	2.02					
2.5	2.90	2.72	2.53				
3.0	3.59	3.41	3.22	3.04			
3.5	4.29	4.10	3.91	3.73	3.54		
4.0	4.98	4.79	4.61	4.42	4.23	4.05	
5.0	6.36	6.18	5.99	5.80	5.62	5.43	5.06
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.53						
2.0	2.22	2.04					
2.5	2.92	2.73	2.55				
3.0	3.61	3.43	3.24	3.06			
3.5	4.30	4.12	3.94	3.75	3.57		
4.0	4.99	4.81	4.63	4.45	4.27	4.08	
5.0	6.38	6.20	6.01	5.83	5.65	5.47	5.10
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	1.54						
2.0	2.24	2.06					
2.5	2.93	2.75	2.57				
3.0	3.62	3.44	3.27	3.09			
3.5	4.31	4.14	3.96	3.78	3.60		
4.0	5.01	4.83	4.65	4.47	4.30	4.12	
5.0	6.39	6.21	6.03	5.86	5.68	5.50	5.15

Early Retirement—Replacement of a Heat Pump

See Table 2-175 through Table 2-183 for the winter demand savings (kW) associated with a central heat pump replacing another heat pump for all five Texas climate zones. In each table, the capacity of the efficient unit is represented in the columns and the capacity of the existing unit is represented in the rows. The savings are in the intersection of the appropriate efficient

and existing capacities. Replacements where there has been no change in capacity are highlighted in light blue and bold text.

Climate Zone 1: Panhandle Region, Amarillo Weather Data

Table 2-175: Winter Demand Savings for 7.7 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.83	0.22					
2.5	1.50	0.89	0.28				
3.0	2.16	1.55	0.94	0.34			
3.5	2.82	2.22	1.61	1.00	0.39		
4.0	3.49	2.88	2.27	1.66	1.06	0.45	
5.0	4.81	4.21	3.60	2.99	2.38	1.78	0.56
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.86	0.27					
2.5	1.53	0.93	0.33				
3.0	2.19	1.59	1.00	0.40			
3.5	2.86	2.26	1.66	1.06	0.47		
4.0	3.52	2.92	2.32	1.73	1.13	0.53	
5.0	4.85	4.25	3.65	3.05	2.46	1.86	0.67
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.92	0.34					
2.5	1.59	1.01	0.43				
3.0	2.25	1.67	1.09	0.52			
3.5	2.91	2.34	1.76	1.18	0.72		
4.0	3.58	3.00	2.42	1.84	1.39	0.69	
5.0	4.90	4.33	3.75	3.17	2.72	2.02	0.86

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.97	0.41					
2.5	1.64	1.08	0.52				
3.0	2.30	1.74	1.18	0.62			
3.5	2.97	2.41	1.85	1.29	0.72		
4.0	3.63	3.07	2.51	1.95	1.39	0.83	
5.0	4.96	4.40	3.84	3.28	2.72	2.16	1.04
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	1.00	0.45					
2.5	1.66	1.11	0.56				
3.0	2.33	1.77	1.22	0.67			
3.5	2.99	2.44	1.89	1.33	0.78		
4.0	3.65	3.10	2.55	2.00	1.45	0.89	
5.0	4.98	4.43	3.88	3.33	2.77	2.22	1.12
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.36						
2.0	1.02	0.48					
2.5	1.69	1.14	0.60				
3.0	2.35	1.81	1.26	0.72			
3.5	3.01	2.47	1.92	1.38	0.84		
4.0	3.68	3.13	2.59	2.04	1.50	0.95	
5.0	5.00	4.46	3.92	3.37	2.83	2.28	1.19

Table 2-176: Winter Demand Savings for 6.8 HSPF Baseline—Zone 1

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.45						
2.0	1.21	0.60					
2.5	1.96	1.36	0.75				
3.0	2.72	2.11	1.51	0.90			
3.5	3.48	2.87	2.26	1.66	1.05		
4.0	4.24	3.63	3.02	2.41	1.81	1.20	
5.0	5.75	5.15	4.54	3.93	3.32	2.71	1.50
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.48						
2.0	1.24	0.64					
2.5	2.00	1.40	0.80				
3.0	2.75	2.16	1.56	0.96			
3.5	3.51	2.91	2.32	1.72	1.12		
4.0	4.27	3.67	3.07	2.48	1.88	1.28	
5.0	5.78	5.19	4.59	3.99	3.40	2.80	1.60
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.30	0.72					
2.5	2.05	1.48	0.90				
3.0	2.81	2.23	1.66	1.08			
3.5	3.57	2.99	2.41	1.84	1.49		
4.0	4.33	3.75	3.17	2.59	2.25	1.44	
5.0	5.84	5.26	4.69	4.11	3.76	2.95	1.80

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.59						
2.0	1.35	0.79					
2.5	2.11	1.55	0.99				
3.0	2.86	2.30	1.74	1.18			
3.5	3.62	3.06	2.50	1.94	1.38		
4.0	4.38	3.82	3.26	2.70	2.14	1.58	
5.0	5.90	5.33	4.77	4.21	3.65	3.09	1.97
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.62						
2.0	1.37	0.82					
2.5	2.13	1.58	1.03				
3.0	2.89	2.34	1.78	1.23			
3.5	3.65	3.09	2.54	1.99	1.44		
4.0	4.40	3.85	3.30	2.75	2.20	1.64	
5.0	5.92	5.37	4.82	4.26	3.71	3.16	2.05
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.64						
2.0	1.40	0.85					
2.5	2.15	1.61	1.07				
3.0	2.91	2.37	1.82	1.28			
3.5	3.67	3.13	2.58	2.04	1.49		
4.0	4.43	3.88	3.34	2.79	2.25	1.71	
5.0	5.94	5.40	4.85	4.31	3.76	3.22	2.13

Climate Zone 2: North Region, Dallas / Ft. Worth Weather Data

Table 2-177: Winter Demand Savings for 7.7 HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.79	0.23					
2.5	1.41	0.84	0.28				
3.0	2.03	1.46	0.90	0.34			
3.5	2.64	2.08	1.52	0.96	0.39		
4.0	3.26	2.70	2.14	1.58	1.01	0.45	
5.0	4.50	3.94	3.38	2.81	2.25	1.69	0.56
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.82	0.27					
2.5	1.44	0.89	0.33				
3.0	2.06	1.51	0.95	0.40			
3.5	2.68	2.12	1.57	1.02	0.47		
4.0	3.30	2.74	2.19	1.64	1.09	0.54	
5.0	4.53	3.98	3.43	2.88	2.33	1.77	0.67
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.26						
2.0	0.88	0.35					
2.5	1.50	0.96	0.43				
3.0	2.12	1.58	1.05	0.52			
3.5	2.74	2.20	1.67	1.14	0.73		
4.0	3.35	2.82	2.29	1.76	1.35	0.69	
5.0	4.59	4.06	3.53	2.99	2.59	1.93	0.86

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.93	0.42					
2.5	1.55	1.04	0.52				
3.0	2.17	1.65	1.14	0.62			
3.5	2.79	2.27	1.76	1.24	0.73		
4.0	3.41	2.89	2.38	1.86	1.35	0.83	
5.0	4.64	4.13	3.61	3.10	2.59	2.07	1.04
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.34						
2.0	0.96	0.45					
2.5	1.57	1.07	0.56				
3.0	2.19	1.69	1.18	0.67			
3.5	2.81	2.31	1.80	1.29	0.79		
4.0	3.43	2.92	2.42	1.91	1.40	0.90	
5.0	4.67	4.16	3.66	3.15	2.64	2.14	1.12
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.36						
2.0	0.98	0.48					
2.5	1.60	1.10	0.60				
3.0	2.22	1.72	1.22	0.72			
3.5	2.84	2.34	1.84	1.34	0.84		
4.0	3.45	2.96	2.46	1.96	1.46	0.96	
5.0	4.69	4.19	3.69	3.20	2.70	2.20	1.20

Table 2-178: Winter Demand Savings for 6.8 HSPF Baseline—Zone 2

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.45						
2.0	1.16	0.60					
2.5	1.88	1.32	0.75				
3.0	2.59	2.03	1.47	0.90			
3.5	3.30	2.74	2.18	1.62	1.05		
4.0	4.02	3.46	2.89	2.33	1.77	1.20	
5.0	5.44	4.88	4.32	3.76	3.19	2.63	1.51
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.48						
2.0	1.20	0.64					
2.5	1.91	1.36	0.81				
3.0	2.62	2.07	1.52	0.97			
3.5	3.34	2.78	2.23	1.68	1.13		
4.0	4.05	3.50	2.95	2.39	1.84	1.29	
5.0	5.48	4.92	4.37	3.82	3.27	2.72	1.61
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.26	0.72					
2.5	1.97	1.44	0.90				
3.0	2.68	2.15	1.62	1.08			
3.5	3.39	2.86	2.33	1.80	1.50		
4.0	4.11	3.58	3.04	2.51	2.21	1.45	
5.0	5.53	5.00	4.47	3.94	3.64	2.87	1.81

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.59						
2.0	1.31	0.79					
2.5	2.02	1.51	0.99				
3.0	2.73	2.22	1.70	1.19			
3.5	3.45	2.93	2.42	1.90	1.39		
4.0	4.16	3.65	3.13	2.62	2.10	1.59	
5.0	5.59	5.07	4.56	4.04	3.53	3.01	1.98
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.62						
2.0	1.33	0.83					
2.5	2.05	1.54	1.03				
3.0	2.76	2.25	1.75	1.24			
3.5	3.47	2.97	2.46	1.95	1.45		
4.0	4.19	3.68	3.17	2.67	2.16	1.65	
5.0	5.61	5.10	4.60	4.09	3.58	3.08	2.06
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.64						
2.0	1.36	0.86					
2.5	2.07	1.57	1.07				
3.0	2.78	2.28	1.78	1.29			
3.5	3.50	3.00	2.50	2.00	1.50		
4.0	4.21	3.71	3.21	2.71	2.21	1.71	
5.0	5.63	5.14	4.64	4.14	3.64	3.14	2.14

Climate Zone 3: South Region, Houston Weather Data

Table 2-179: Winter Demand Savings for 7.7 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.15						
2.0	0.53	0.20					
2.5	0.91	0.57	0.24				
3.0	1.28	0.95	0.62	0.29			
3.5	1.66	1.33	1.00	0.67	0.34		
4.0	2.04	1.71	1.38	1.05	0.72	0.39	
5.0	2.80	2.47	2.14	1.81	1.48	1.15	0.49
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.55	0.23					
2.5	0.93	0.61	0.29				
3.0	1.31	0.99	0.67	0.35			
3.5	1.69	1.37	1.05	0.73	0.41		
4.0	2.07	1.75	1.43	1.11	0.79	0.46	
5.0	2.83	2.51	2.19	1.87	1.54	1.22	0.58
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.60	0.30					
2.5	0.98	0.68	0.37				
3.0	1.36	1.06	0.75	0.45			
3.5	1.74	1.44	1.13	0.83	0.63		
4.0	2.12	1.82	1.51	1.21	1.01	0.60	
5.0	2.88	2.58	2.27	1.97	1.77	1.36	0.75

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.65	0.36					
2.5	1.03	0.74	0.45				
3.0	1.41	1.12	0.83	0.54			
3.5	1.79	1.50	1.21	0.92	0.63		
4.0	2.17	1.88	1.59	1.30	1.01	0.72	
5.0	2.93	2.64	2.35	2.06	1.77	1.48	0.90
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.67	0.39					
2.5	1.05	0.77	0.49				
3.0	1.43	1.15	0.87	0.58			
3.5	1.81	1.53	1.24	0.96	0.68		
4.0	2.19	1.91	1.62	1.34	1.06	0.78	
5.0	2.95	2.67	2.38	2.10	1.82	1.54	0.97
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.69	0.42					
2.5	1.07	0.80	0.52				
3.0	1.45	1.17	0.90	0.62			
3.5	1.83	1.55	1.28	1.00	0.73		
4.0	2.21	1.93	1.66	1.38	1.11	0.83	
5.0	2.97	2.69	2.42	2.14	1.87	1.59	1.04

Table 2-180: Winter Demand Savings for 6.8 HSPF Baseline—Zone 3

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.39						
2.0	0.85	0.52					
2.5	1.31	0.98	0.65				
3.0	1.77	1.44	1.11	0.78			
3.5	2.24	1.91	1.57	1.24	0.91		
4.0	2.70	2.37	2.04	1.70	1.37	1.04	
5.0	3.62	3.29	2.96	2.63	2.30	1.97	1.30
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.42						
2.0	0.88	0.56					
2.5	1.34	1.02	0.70				
3.0	1.80	1.48	1.16	0.84			
3.5	2.26	1.94	1.62	1.30	0.98		
4.0	2.72	2.40	2.08	1.76	1.44	1.12	
5.0	3.65	3.33	3.00	2.68	2.36	2.04	1.40
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.47						
2.0	0.93	0.63					
2.5	1.39	1.09	0.78				
3.0	1.85	1.55	1.24	0.94			
3.5	2.31	2.01	1.71	1.40	1.30		
4.0	2.78	2.47	2.17	1.86	1.76	1.25	
5.0	3.70	3.39	3.09	2.78	2.68	2.17	1.57

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.52						
2.0	0.98	0.69					
2.5	1.44	1.15	0.86				
3.0	1.90	1.61	1.32	1.03			
3.5	2.36	2.07	1.78	1.49	1.20		
4.0	2.82	2.53	2.24	1.95	1.66	1.37	
5.0	3.74	3.45	3.16	2.88	2.59	2.30	1.72
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.54						
2.0	1.00	0.72					
2.5	1.46	1.18	0.89				
3.0	1.92	1.64	1.36	1.07			
3.5	2.38	2.10	1.82	1.53	1.25		
4.0	2.84	2.56	2.28	2.00	1.71	1.43	
5.0	3.76	3.48	3.20	2.92	2.64	2.35	1.79
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.56						
2.0	1.02	0.74					
2.5	1.48	1.20	0.93				
3.0	1.94	1.66	1.39	1.11			
3.5	2.40	2.13	1.85	1.57	1.30		
4.0	2.86	2.59	2.31	2.04	1.76	1.48	
5.0	3.78	3.51	3.23	2.96	2.68	2.41	1.86

Climate Zone 4: Valley Region Corpus Christi Weather Data

Table 2-181: Winter Demand Savings for 7.7 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.11						
2.0	0.39	0.15					
2.5	0.68	0.43	0.18				
3.0	0.96	0.72	0.47	0.22			
3.5	1.25	1.00	0.75	0.50	0.26		
4.0	1.53	1.29	1.04	0.79	0.54	0.29	
5.0	2.10	1.85	1.61	1.36	1.11	0.86	0.37
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.13						
2.0	0.42	0.17					
2.5	0.70	0.46	0.22				
3.0	0.98	0.74	0.50	0.26			
3.5	1.27	1.03	0.79	0.55	0.30		
4.0	1.55	1.31	1.07	0.83	0.59	0.35	
5.0	2.12	1.88	1.64	1.40	1.16	0.92	0.44
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.45	0.22					
2.5	0.74	0.51	0.28				
3.0	1.02	0.79	0.57	0.34			
3.5	1.31	1.08	0.85	0.62	0.47		
4.0	1.59	1.36	1.14	0.91	0.76	0.45	
5.0	2.16	1.93	1.70	1.48	1.33	1.02	0.56

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.49	0.27					
2.5	0.77	0.56	0.34				
3.0	1.06	0.84	0.62	0.41			
3.5	1.34	1.12	0.91	0.69	0.47		
4.0	1.63	1.41	1.19	0.98	0.76	0.54	
5.0	2.20	1.98	1.76	1.54	1.33	1.11	0.68
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.22						
2.0	0.50	0.29					
2.5	0.79	0.58	0.36				
3.0	1.07	0.86	0.65	0.44			
3.5	1.36	1.15	0.93	0.72	0.51		
4.0	1.64	1.43	1.22	1.01	0.80	0.58	
5.0	2.21	2.00	1.79	1.58	1.36	1.15	0.73
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.23						
2.0	0.52	0.31					
2.5	0.80	0.60	0.39				
3.0	1.09	0.88	0.67	0.47			
3.5	1.37	1.17	0.96	0.75	0.55		
4.0	1.66	1.45	1.24	1.04	0.83	0.62	
5.0	2.23	2.02	1.81	1.61	1.40	1.19	0.78

Table 2-182: Winter Demand Savings for 6.8 HSPF Baseline—Zone 4

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.29						
2.0	0.64	0.39					
2.5	0.99	0.74	0.49				
3.0	1.33	1.08	0.84	0.59			
3.5	1.68	1.43	1.18	0.93	0.69		
4.0	2.02	1.78	1.53	1.28	1.03	0.78	
5.0	2.72	2.47	2.22	1.97	1.72	1.47	0.98
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.31						
2.0	0.66	0.42					
2.5	1.01	0.77	0.52				
3.0	1.35	1.11	0.87	0.63			
3.5	1.70	1.46	1.22	0.97	0.73		
4.0	2.04	1.80	1.56	1.32	1.08	0.84	
5.0	2.74	2.50	2.25	2.01	1.77	1.53	1.05
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.70	0.47					
2.5	1.04	0.82	0.59				
3.0	1.39	1.16	0.93	0.70			
3.5	1.74	1.51	1.28	1.05	0.97		
4.0	2.08	1.85	1.63	1.40	1.32	0.94	
5.0	2.77	2.55	2.32	2.09	2.01	1.63	1.17

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.39						
2.0	0.73	0.52					
2.5	1.08	0.86	0.64				
3.0	1.42	1.21	0.99	0.77			
3.5	1.77	1.55	1.34	1.12	0.90		
4.0	2.12	1.90	1.68	1.47	1.25	1.03	
5.0	2.81	2.59	2.37	2.16	1.94	1.72	1.29
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.40						
2.0	0.75	0.54					
2.5	1.09	0.88	0.67				
3.0	1.44	1.23	1.02	0.81			
3.5	1.79	1.57	1.36	1.15	0.94		
4.0	2.13	1.92	1.71	1.50	1.29	1.07	
5.0	2.82	2.61	2.40	2.19	1.98	1.77	1.34
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.42						
2.0	0.76	0.56					
2.5	1.11	0.90	0.70				
3.0	1.46	1.25	1.04	0.84			
3.5	1.80	1.59	1.39	1.18	0.97		
4.0	2.15	1.94	1.73	1.53	1.32	1.11	
5.0	2.84	2.63	2.43	2.22	2.01	1.81	1.39

Climate Zone 5: West Region El Paso Weather Data

Table 2-183: Winter Demand Savings for 7.7 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.09						
2.0	0.34	0.13					
2.5	0.58	0.37	0.16				
3.0	0.83	0.61	0.40	0.19			
3.5	1.07	0.86	0.65	0.43	0.22		
4.0	1.32	1.10	0.89	0.68	0.46	0.25	
5.0	1.80	1.59	1.38	1.17	0.95	0.74	0.31
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.11						
2.0	0.36	0.15					
2.5	0.60	0.39	0.19				
3.0	0.85	0.64	0.43	0.22			
3.5	1.09	0.88	0.68	0.47	0.26		
4.0	1.33	1.13	0.92	0.71	0.51	0.30	
5.0	1.82	1.62	1.41	1.20	0.99	0.79	0.37
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.14						
2.0	0.39	0.19					
2.5	0.63	0.44	0.24				
3.0	0.88	0.68	0.49	0.29			
3.5	1.12	0.93	0.73	0.53	0.41		
4.0	1.37	1.17	0.97	0.78	0.65	0.39	
5.0	1.86	1.66	1.46	1.27	1.14	0.87	0.48

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.17						
2.0	0.42	0.23					
2.5	0.66	0.48	0.29				
3.0	0.91	0.72	0.53	0.35			
3.5	1.15	0.97	0.78	0.59	0.41		
4.0	1.40	1.21	1.02	0.84	0.65	0.46	
5.0	1.88	1.70	1.51	1.33	1.14	0.95	0.58
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.19						
2.0	0.43	0.25					
2.5	0.68	0.49	0.31				
3.0	0.92	0.74	0.56	0.38			
3.5	1.17	0.98	0.80	0.62	0.44		
4.0	1.41	1.23	1.05	0.86	0.68	0.50	
5.0	1.90	1.72	1.53	1.35	1.17	0.99	0.63
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.20						
2.0	0.45	0.27					
2.5	0.69	0.51	0.33				
3.0	0.93	0.76	0.58	0.40			
3.5	1.18	1.00	0.82	0.65	0.47		
4.0	1.42	1.25	1.07	0.89	0.71	0.54	
5.0	1.91	1.73	1.56	1.38	1.20	1.02	0.67

Table 2-184: Winter Demand Savings for 6.8 HSPF Baseline—Zone 5

8.5 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.25						
2.0	0.55	0.34					
2.5	0.85	0.63	0.42				
3.0	1.14	0.93	0.72	0.50			
3.5	1.44	1.23	1.01	0.80	0.59		
4.0	1.74	1.52	1.31	1.10	0.88	0.67	
5.0	2.33	2.12	1.90	1.69	1.48	1.27	0.84
8.6-8.9 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.27						
2.0	0.57	0.36					
2.5	0.86	0.66	0.45				
3.0	1.16	0.95	0.75	0.54			
3.5	1.46	1.25	1.04	0.84	0.63		
4.0	1.75	1.55	1.34	1.13	0.93	0.72	
5.0	2.35	2.14	1.93	1.73	1.52	1.31	0.90
9.0-9.2 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.30						
2.0	0.60	0.40					
2.5	0.90	0.70	0.50				
3.0	1.19	1.00	0.80	0.60			
3.5	1.49	1.29	1.10	0.90	0.84		
4.0	1.79	1.59	1.39	1.20	1.13	0.81	
5.0	2.38	2.18	1.99	1.79	1.73	1.40	1.01

9.3-9.4 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.33						
2.0	0.63	0.44					
2.5	0.93	0.74	0.55				
3.0	1.22	1.04	0.85	0.66			
3.5	1.52	1.33	1.15	0.96	0.77		
4.0	1.82	1.63	1.44	1.26	1.07	0.88	
5.0	2.41	2.22	2.04	1.85	1.67	1.48	1.11
9.5-9.6 HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.35						
2.0	0.64	0.46					
2.5	0.94	0.76	0.58				
3.0	1.24	1.05	0.87	0.69			
3.5	1.53	1.35	1.17	0.99	0.81		
4.0	1.83	1.65	1.47	1.28	1.10	0.92	
5.0	2.42	2.24	2.06	1.88	1.70	1.52	1.15
9.7+ HSPF							
Size (tons) post	1.5	2.0	2.5	3.0	3.5	4.0	5.0
Size (tons) pre							
1.5	0.36						
2.0	0.66	0.48					
2.5	0.95	0.77	0.60				
3.0	1.25	1.07	0.89	0.72			
3.5	1.55	1.37	1.19	1.01	0.84		
4.0	1.84	1.67	1.49	1.31	1.13	0.96	
5.0	2.44	2.26	2.08	1.90	1.73	1.55	1.19

Early Retirement—Replacement of an Electric Resistance Furnace

See Table 2-170 through Table 2-174 for the winter demand savings (kW) associated with a central heat pump replacing an electric resistance furnace for all five Texas climate zones

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a central heat pump unit is 15 years based on the current DOE Final Rule standards for central heat pumps.¹⁶⁵

This value is consistent with the EUL reported in the Department of Energy 76 Final Rule 37408 Technical Support Document for Energy Conservation Standards for Heat Pumps.¹⁶⁶

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Decision/action type (early retirement, replace-on-burnout, new construction)
- Cooling capacity of the installed unit (tons)
- Seasonal Energy Efficiency Ratio (SEER) and Energy Efficiency Ratio (EER) of the installed unit
- Heating Seasonal Performance Factor (HSPF) of the installed unit
- Type of unit replaced (e.g., electric resistance furnace, air source heat pump)
- Age of the replaced unit (Early Retirement only)
- Recommended: retired unit model number, serial number, and manufacturer (Early Retirement or Downsizing)
- Recommended: photograph of retired unit nameplate (Early Retirement or Downsizing)
- If photograph of retired unit nameplate is unavailable or not legible, provide estimated square footage of conditioned area served by the retired unit (Downsizing only)
- Recommended: customer responses to survey questionnaire for early retirement eligibility determination (Early Retirement only)

¹⁶⁵ Final Rule: Standards, Federal Register, 76 FR 37408 (June 27, 2011) and associated Technical Support Document. Accessed 10/21/2014.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/75. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2011-BT-STD-0011-0012>.

¹⁶⁶ Department of Energy, Federal Register, 76 FR 37408, Technical Support Document: 8.2.3.5 Lifetime. June 2011.

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- ASHRAE 90.1-1999 (Residential Buildings)
- ACCA Manual J Residential Load Calculation (8th Edition)¹⁶⁷

Document Revision History

Table 2-185: Central Heat Pump Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Low-income and Hard-to-Reach Market Transformation section merged with main measure as “Early Retirement” option. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Early retirement savings may be claimed through any appropriately designed program in accordance with EM&V team’s memo, “Considerations for early replacement of residential equipment.” Remaining useful lifetimes updated.
v3.1	11/05/2015	TRM v3.1 update. Revision of cooling savings to reflect heat-pump-specific performance curves. Extension of Early Retirement cooling savings tables to higher SEER values. Clarification around summer demand savings for single-stage and two-stage units.
v4.0	10/10/2016	TRM v4.0 update. Added RUL value for units with an age of one year. Added a default RUL value for when the age of the unit is unknown. Eliminated the eligibility requirement of the existing unit to have a minimum age of five years. Updated savings for 15.0-15.9 SEER range.
v5.0	10/2017	TRM v5.0 update. Switched to air conditioner capacity and EIR curve coefficients for estimated heat pump cooling savings. Updated energy savings to use TMY3 temperature bin hours. Updated demand savings for compliance with current peak definition. Added 12.44 SEER and 6.8 HSPF baseline savings tables previously referencing earlier version of TRM. Updated baseline to include replacing air conditioners with gas heat.

¹⁶⁷ <https://www.acca.org/store/product.php?pid=172>.

2.2.6 Room Air Conditioners Measure Overview

TRM Measure ID: R-HV-WA

Market Sector: Residential

Measure Category: HVAC

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction, Early Retirement

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

The following deemed savings values are applicable in calculating an incentive for the installation of a high-efficiency room air conditioner in a newly-constructed home or a room air conditioner replaced with a higher efficiency room air conditioner in a dwelling occupied by a residential energy consumer.

Eligibility Criteria

Installed room air conditioners must be compliant with the current ENERGY STAR® specification for room air conditioners.

Utilities should refer to the January 2015 memo, “Considerations for early replacement of residential equipment,”¹⁶⁸ when designing programs that permit savings to be claimed for early retirement. In order to be awarded early retirement savings, the unit to be replaced must be functioning at the time of removal with a maximum age of 12 years.

Baseline Condition

For new construction and replace-on-burnout, the baseline is assumed to be a new room air conditioning unit with a CEER rating that is compliant with the current federal standard,¹⁶⁹

¹⁶⁸ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. “Considerations for early replacement of residential equipment.” Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to Texas investor-owned utilities through the EM&V team’s SharePoint.

¹⁶⁹ DOE minimum efficiency standard for residential room air conditioners.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/41.

effective June 1, 2014. The new standard is stated in terms of the Combined Energy Efficiency Ratio (CEER), which accounts for standby/off-mode energy usage. The new standard is stated in terms of the Combined Energy Efficiency Ratio (CEER), which accounts for standby/off-mode energy usage.

For early retirement, the baseline efficiency is assumed to match the minimum federal standard efficiencies in place prior to June 1, 2014.

Table 2-186: Room Air Conditioner Baseline Efficiencies for ER, ROB, and NC

Reverse Cycle (Yes/No)	Louvered Sides (Yes/No)	Capacity (Btu/hr)	Federal Standard prior to June 1, 2014	Federal Standard as of June 1, 2014
			ER Baseline EER	ROB/NC Baseline CEER
No	Yes	< 8,000	9.7	11.0
		≥ 8,000 and < 14,000	9.8	10.9
		≥ 14,000 and < 20,000	9.7	10.7
		≥ 20,000 and < 25,000	8.5	9.4
		≥ 25,000	8.5	9.0
No	No	< 8,000	9.0	10.0
		≥ 8,000 and < 11,000	8.5	9.6
		≥ 11,000 and < 14,000	8.5	9.5
		≥ 14,000 and < 20,000	8.5	9.3
		≥ 20,000	8.5	9.4
Yes	Yes	< 20,000	9.0	9.8
		≥ 20,000	8.5	9.3
Yes	No	< 14,000	8.5	9.3
		≥ 14,000	8.0	8.7
Casement-only		All capacities	All capacities	9.5
Casement-slider		All capacities	All capacities	10.4

High-Efficiency Condition

ENERGY STAR[®] specifications effective October 30, 2015 are provided in Table 2-187 as the efficient condition.¹⁷⁰ Energy efficiency service providers are expected to comply with the latest ENERGY STAR[®] requirements.

¹⁷⁰ ENERGY STAR[®] Program Requirements Product Specification for Room Air Conditioners: Eligibility Criteria Version 4.0.
<http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Final%20Version%204.0%20Room%20Air%20Conditioners%20Specification.pdf>. February 20, 2015.

Table 2-187: Room Air Conditioner Efficient Condition Specifications

Reverse Cycle (Yes/No)	Louvered Sides (Yes/No)	Capacity (Btu/hr)	Minimum CEER as of October 30, 2015
No	Yes	< 8,000	12.1
		≥ 8,000 and < 14,000	12.0
		≥ 14,000 and < 20,000	11.8
		≥ 20,000 and < 25,000	10.3
		≥ 25,000	9.9
No	No	< 8,000	11.0
		≥ 8,000 and < 11,000	10.6
		≥ 11,000 and < 14,000	10.5
		≥ 14,000 and < 20,000	10.2
		≥ 20,000	10.3
Yes	Yes	< 20,000	10.8
		≥ 20,000	10.2
Yes	No	< 14,000	10.2
		≥ 14,000	9.6
Casement-only		All capacities	10.5
Casement-slider		All capacities	11.4

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Peak demand and annual energy savings for room air conditioners should be calculated as shown next.

New Construction or Replace-on-Burnout

Energy Savings Algorithms

$$kWh_{Savings,C} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times AOH_C \times \left(\frac{1}{CEER_{Base}} - \frac{1}{CEER_{RAC}} \right)$$

Equation 65

Where:

CAP	=	Rated equipment cooling capacity of the installed room air conditioner (Btu/hr)
AOH_C	=	Annual operating hours for cooling (Table 2-188)
$CEER_{Base}$	=	Combined Energy Efficiency Ratio of the baseline cooling equipment (Table 2-186)
$CEER_{RAC}$	=	Combined Energy Efficiency Ratio of the installed room air conditioner

Table 2-188: Room Air Conditioner Annual Operating Hours for Cooling¹⁷¹

Climate Zone	AOH _C
Climate Zone 1: Panhandle	820
Climate Zone 2: North	1,374
Climate Zone 3: South	1,308
Climate Zone 4: Valley	2,150
Climate Zone 5: West	1,204

Demand Savings Algorithms

$$kW_{Savings} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times \left(\frac{1}{CEER_{Base}} - \frac{1}{CEER_{RAC}} \right) \times CF$$

Equation 66

Where:

CAP	=	Rated equipment cooling capacity of the installed room air conditioner (Btu/hr)
$CEER_{Base}$	=	Combined Energy Efficiency Ratio of the baseline cooling equipment (Table 2-186)

¹⁷¹ Association of Home Appliance Manufacturers (AHAM) Room Air Conditioner Cooling Calculator.
http://www.cooloff.org/sub_cool.html.

$CEER_{RAC}$ = Combined Energy Efficiency Ratio of the installed room air conditioner

CF = Coincidence Factor = (Table 2-4)

Table 2-189: Room Air Conditioners—Coincidence Factors¹⁷²

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.977	0.937	0.904	0.833	0.920

Early Retirement

Annual energy (kWh) and summer peak demand (kW) savings must be calculated separately for two time periods:

1. The estimated remaining life of the equipment that is being removed, designated the remaining useful life (RUL), and
2. The remaining time in the EUL period (8—RUL)

Annual energy (kWh) savings are calculated by weighting the early retirement and replace-on-burnout savings by the RUL of the unit and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.

Where:

RUL = Remaining Useful Life (see Table 2-190); if unknown, assume the age of the replaced unit is equal to the EUL resulting in a default RUL of 5.0 years

EUL = Estimated Useful Life = 8 years

Table 2-190: Remaining Useful Life (RUL) of Replaced Room Air Conditioner

Age of Replaced Unit (years)	RUL (years)	Age of Replaced Unit (years)	RUL (years)
1	8.0	8	5.0
2	7.2	9	4.0
3	6.2	10	3.0
4	5.2	11	2.0
5	5.2	12	1.0
6	5.2	13 ^{173,174}	0.0
7	5.2		

¹⁷² See Volume 1, Appendix B.

¹⁷³ RULs are capped at the 75th percentile of equipment age, 13 years, based on DOE survival curves. Systems older than 13 years should use the ROB baseline. See the January 2015 memo, "Considerations for early replacement of residential equipment," for further detail.

¹⁷⁴ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. "Considerations for early replacement of residential equipment." Prepared by the Evaluation, Measurement, and Verification (EM&V) team for

Derivation of RULs

Room air conditioners have an estimated useful life of 8 years. This estimate is consistent with the age at which approximately 50 percent of the room air conditioners installed in a given year will no longer be in service, as described by the survival function in Figure 2-5.

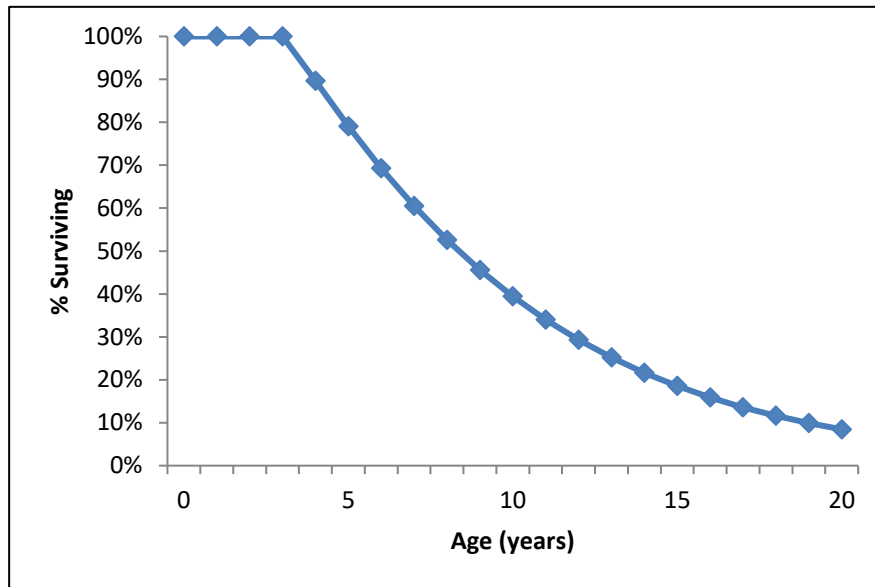


Figure 2-5: Survival Function for Room Air Conditioners¹⁷⁵

The method for estimating the remaining useful life (RUL) of a replaced system uses the age of the existing system to re-estimate the survival function shown in

Figure 2-5. The age of the room air conditioner being replaced is found on the horizontal axis, and the corresponding percentage of surviving room air conditioners is determined from the chart. The surviving percentage value is then divided in half, creating a new percentage. Then, the age (year) that corresponds to this new percentage is read from the chart. RUL is estimated as the difference between that age and the current age of the system being replaced.

the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to all Texas investor-owned utilities through the EM&V team's SharePoint.

¹⁷⁵ Department of Energy, Federal Register, 76 FR 22454, Technical Support Document: 8.2.2.6 Product Lifetime. April 2011.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/41. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2007-BT-STD-0010-0053>.

Energy Savings Algorithms

For the RUL time period:

$$kWh_{savings,ER} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times AOH_C \times \left(\frac{1}{EER_{ER}} - \frac{1}{CEER_{RAC}} \right)$$

Equation 67

For the remaining time in the EUL period, calculate annual savings as you would for a replace-on-burnout project:

$$kWh_{savings,ROB} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times AOH_C \times \left(\frac{1}{CEER_{ROB}} - \frac{1}{CEER_{RAC}} \right)$$

Equation 68

Where:

CAP	=	Rated equipment cooling capacity of the installed room air conditioner (Btu/hr)
AOH_C	=	Annual operating hours for cooling (Table 2-188)
$CEER_{ROB}$	=	Combined Energy Efficiency Ratio of the replace-on-burnout baseline cooling equipment (Table 2-186)
EER_{ER}	=	Energy Efficiency Ratio of the early retirement baseline cooling equipment (Table 2-186)
$CEER_{RAC}$	=	Combined Energy Efficiency Ratio of the installed room air conditioner

Summer Demand Savings Algorithms

To calculate demand savings for the early retirement of a room air conditioner, a similar methodology is used as for replace-on-burnout installations, with separate savings calculated for the remaining useful life of the unit, and the remainder of the EUL as outlined in the section above.

For the RUL time period:

$$kW_{Savings,ER} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times \left(\frac{1}{EER_{ER}} - \frac{1}{EER_{RAC}} \right) \times CF$$

Equation 69

For the remaining time in the EUL period, calculate annual savings as you would for a replace-on-burnout project:

$$kW_{Savings,ROB} = CAP \times \frac{1 \text{ kW}}{1,000 \text{ W}} \times \left(\frac{1}{EER_{ROB}} - \frac{1}{EER_{RAC}} \right) \times CF$$

Equation 70

Deemed Energy Savings Tables

Replace-On-Burnout

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Early Retirement

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

Replace-On-Burnout

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Early Retirement

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a room air conditioning unit is 8 years based on the Technical Support Document for the current DOE Final Rule standards for room air conditioners.¹⁷⁶

This value is consistent with the EUL reported in the Department of Energy 76 Final Rule 52852 Technical Support Document for Energy Conservation Standards for Room Air Conditioners.¹⁷⁷

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Decision/action type (Early Retirement, Replace-on-Burnout, New Construction)
- Cooling capacity of the installed unit (Btu/hr)
- Combined Energy Efficiency Ratio (CEER) of the unit installed
- Age of the replaced unit (Early Retirement only)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- The applicable version of the ENERGY STAR® specifications and requirements for room air conditioners.
- Code of Federal Regulations, 10 CFR 430.32(b)

¹⁷⁶ The median lifetime was calculated using the survival function outlined in the DOE Technical Support Document. Final Rule: Standards, Federal Register, 76 FR 22454 (April 21, 2011) and associated Technical Support Document.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/41. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2007-BT-STD-0010-0053>.

¹⁷⁷ Department of Energy, Federal Register, 76 FR 52852, Technical Support Document: 8.2.2.6 Product Lifetime. April 2011. http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/41.

Document Revision History

Table 2-191: Room Air Conditioner Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Low-income and Hard-to-Reach Market Transformation section merged with main measure as "Early Retirement" option. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Early retirement savings may be claimed through any appropriately designed program in accordance with EM&V team's memo, "Considerations for early replacement of residential equipment." Remaining useful lifetimes updated. Updated EUL to align with median lifetime. New Construction permitted to claim savings. New ENERGY STAR® standards incorporated.
v3.1	11/05/2015	TRM v3.1 update. No revision.
v4.0	10/10/2016	TRM v4.0 update. Added RUL values for units with an age of one to three years. Added a default RUL value for when the age of the unit is unknown. Eliminated the eligibility requirement of the existing unit to have a minimum age of five years.
v5.0	10/2017	TRM v5.0 update. Updated peak coincidence factors for compliance with current Texas peak definition. Single coincidence factor replaced with individual factors for each climate zone.

2.3 RESIDENTIAL: BUILDING ENVELOPE

2.3.1 Air Infiltration Measure Overview

TRM Measure ID: R-BE-AI

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling and Engineering Algorithms

Measure Description

This measure involves implementation of interventions to reduce the rate of air infiltration into residences. Pre- and post-treatment blower door air pressure readings are required to confirm air leakage reduction. The standard approach for estimating savings in this measure is based on the results obtained via pre- and post-leakage testing as defined in this measure.

Alternatively, the statewide evaluator is working with utilities to develop an approach that estimates standard savings for eligible air infiltration projects, which would bypass the need to complete leakage testing. This approach will be defined in a forthcoming guidance memo from the statewide evaluator.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes. Homes must be centrally heated with either a furnace (gas or electric resistance) or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with gas or electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

There is an upper limit of 5.2 CFM₅₀ per square foot of house floor area for the pre-retrofit infiltration rate on eligible projects. For homes where the pre-retrofit leakage exceeds this limit, savings will be awarded against the leakage cap. At the utility's discretion, this cap may not

apply to homes implementing the measure under low-income programs.¹⁷⁸ Utilities may require certification or competency testing of personnel who will perform the blower door tests.

Air leakage should be assessed through testing following Building Performance Institute (BPI) standards. In some limited cases, where testing is not possible or unsafe (e.g. due to potential presence of asbestos), visual assessment may be satisfactory. The air leakage testing should not be conducted in homes where either evidence of asbestos or mold is present or suspected due to the age of the home.¹⁷⁹

Utilities' program manuals should be consulted for health and safety considerations related to implementation of air sealing measures.

Only structures with electric refrigerated air conditioning systems are eligible.

Baseline Condition

The baseline for this measure is the existing leakage rate of the treated residence. The existing leakage rate should be capped to account for the fact that the deemed savings values per CFM₅₀ leakage reduction are only applicable up to a point where the existing HVAC equipment would run continuously. Beyond that point, energy use will no longer increase linearly with an increase in leakage.

Baseline assumptions used in the development of these deemed savings are based on a 2013 Lawrence Berkeley National Laboratory (LBNL) analysis of air leakage measurements of US houses.¹⁸⁰ The LBNL study showed that approximately 95 percent of the home infiltration rates were below a normalized leakage rate of 2.0. Normalized leakage can be converted to CFM₅₀/ft² using Equation 71 through Equation 73.

$$NL = 1,000 \times \frac{ELA_4}{A \times 0.3048^2} \times \left(\frac{H \times 0.3048}{2.5 \text{ m}} \right)^{0.3}$$

Equation 71

$$Q_{50} = ELA_4 / \left(\sqrt{\frac{\rho}{2(4 \text{ Pa})}} \times \left(\frac{4 \text{ Pa}}{50 \text{ Pa}} \right)^{0.65} \right)$$

Equation 72

¹⁷⁸ Low-income customers are income-eligible customers served through a targeted low-income energy efficiency program as described in 25.181(r). This may also apply to income-eligible customers served through a hard-to-reach program that is also delivered following the guidelines in 25.181(r).

¹⁷⁹ The Building Performance Institute, Inc. (BPI) Standard Reference: Building Performance Institute Technical Standards for the Building Analyst Professional, v2/28/05mda, Page 1 of 17, states: **"Health and Safety:** Where the presence of asbestos, lead, mold and/or other potentially hazardous material is known or suspected, **all relevant state and federal (EPA) guidelines must be followed to ensure technician and occupant safety.** Blower door depressurization tests may not be performed in homes *where there is a risk of asbestos becoming airborne and being drawn into the dwelling.*"

¹⁸⁰ Chan, W.R., Joh, J., and Sherman, M. H. Analysis of air leakage measurements of US houses. Environmental Energy Technologies Division, Lawrence Berkeley National Laboratory (LBNL), p. 616-625.

$$CFM_{50,pre}/ft^2 = \frac{Q_{50} \times 60 \times 35.3147}{A}$$

Equation 73

Where:

<i>NL</i>	=	<i>Normalized Leakage = 2.0 from LBNL study</i>
<i>ELA₄</i>	=	<i>Area of an orifice that would result in the same air-flow through the building envelope at a pressure difference of 4 Pa (m²)</i>
<i>A</i>	=	<i>Average area of a home in Texas from RECS 2009 (ft²) = 1,757 ft²</i>
<i>H</i>	=	<i>Ceiling height (ft.) = 8.5 (default) ¹⁸¹</i>
<i>0.3048</i>	=	<i>Constant to convert from feet to meters</i>
<i>Q₅₀</i>	=	<i>Leakage rate at 50 Pa (m³/s)</i>
<i>ρ</i>	=	<i>1.2 kg/m³ from LBNL study</i>
<i>CFM_{50,pre} /ft²</i>	=	<i>Maximum per-square-foot pre-installation infiltration rate</i>
<i>60</i>	=	<i>Constant to convert from minutes to seconds</i>
<i>35.3147</i>	=	<i>Constant to convert from cubic meters to cubic feet</i>

Using the above approach, the maximum per-square-foot pre-installation infiltration rate is 5.2 CFM₅₀/ft². Therefore, to avoid incentivizing homes with envelope problems not easily remedied through typical weatherization procedures, or where blower door tests were improperly conducted, these savings should only be applied starting at a baseline CFM₅₀/ft² of 5.2 or lower.

High-Efficiency Condition

Blower door air pressure measurements must also be used to ensure that post-treatment air infiltration rates are not less than those set forth by the standard in Equation 74, based on floor area and number of bedrooms.¹⁸² These calculated minimum CFM₅₀ values assume two occupants for a one-bedroom dwelling unit and an additional person for each additional bedroom. Where higher occupant densities are known, the minimum rate shall be increased by 7.5 CFM_{Nat} for each additional person. A CFM_{Nat} value can be converted to CFM₅₀ by multiplying by the appropriate N factor (Table 2-192).

$$\text{Min } CFM_{50} = [0.03 \times A_{Floor} + 7.5 \times OCC] \times N$$

Equation 74

¹⁸¹ Typical ceiling height of 8 feet adjusted to account for greater ceiling heights in some areas of a typical residence.

¹⁸² ASHRAE 62.2-2013. CFM_{Nat} values converted to CFM₅₀ values by multiplying by appropriate N factor.

Where:

- $Min\ CFM_{50}$ = Minimum final ventilation rate (CFM_{50})
- A_{Floor} = Floor area (ft^2)
- OCC = $BR + 1$, where BR is the number of bedrooms; if number of home occupants is known to exceed $BR + 1$, occupancy should be used instead
- N = N factor (Table 2-192)

Table 2-192: N Factors¹⁸³

Shielding	Number of Stories		
	1 Story	2 Story	3+ Stories
Well shielded	22.2	17.8	15.5
Normal	18.5	14.8	13.0
Exposed	16.7	13.3	11.7

The maximum CFM reduction percentage¹⁸⁴ is capped at 40 percent for RSOP homes. It is important to note that the minimum ventilation rate specified earlier in this section still applies for cases where the maximum 40 percent CFM reduction cannot be achieved due to the post CFM value being limited by the minimum allowable post CFM value provisioned for safety reasons.

The TRM stipulates an upper limit of 5.2 CFM_{50} per square foot of house floor area for the pre-retrofit infiltration rate as part of eligibility criteria. For homes where the pre-retrofit leakage exceeds this limit, energy and demand savings must be calculated using the pre-measure-installation leakage cap. Therefore, when the pre-retrofit leakage is capped, energy and demand savings can only be claimed for a 40 percent reduction in CFM compared to the capped pre-CFM value. When the pre-retrofit leakage is not capped, energy and demand savings can only be claimed for a 40 percent reduction in CFM compared to the tested, actual pre-retrofit infiltration rate of the home.

The TRM requires all contractors to provide sufficient evidence such as pictures capturing the scope/type of retrofit implemented and blower door test readings for all RSOP homes that reach a CFM reduction percentage within the range of 30-40 percent. In the absence of any evidence, the TRM places a cap of 30 percent CFM reduction for calculating energy and demand savings.

At the utility’s discretion, the cap of 40 percent CFM reduction and the ceiling of 5.2 CFM_{50} for pre-retrofit infiltration rate may not apply to homes implementing the measure under low-income programs.

¹⁸³ Krigger, J. and Dorsi, C., “Residential Energy: Cost Savings and Comfort for Existing Buildings”. A-11 Building Tightness Limits, p. 284. Use Zone 2 for Texas climate. http://www.waptac.org/data/files/Website_docs/Technical_Tools/Building%20Tightness%20Limits.pdf.

¹⁸⁴ CFM reduction percentage is calculated as: (pre CFM value – post CFM value) / pre-CFM value

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings, which are expressed as linear functions of the leakage reduction achieved (in CFM₅₀).¹⁸⁵ Specifically, these deemed savings estimates were developed using BEOpt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: the base case air infiltration rate was set to 20 ACH₅₀. Results from running the base case model provide estimated hourly energy use for the prototypical home prior to treatment. Post-treatment conditions were simulated by setting the leakage rate to 3 ACH₅₀.

Deemed savings are presented as a function of the CFM₅₀ reduction achieved, as demonstrated by blower door testing. The kWh and kW per CFM₅₀ values represented by the V_E, V_S, and V_W coefficients are derived by taking the difference between annual energy use and summer and winter peak demand as estimated by the two model runs, and normalizing to the CFM₅₀ reduction achieved. The pre- and post-treatment ACH₅₀ values (20 and 3, respectively) are converted to CFM₅₀ by multiplying the pressurized air-change rate by the volume of the model home and dividing by 60 (minutes/hour).

Deemed Energy Savings Tables

Table 2-193 presents the energy savings per CFM₅₀ reduction for a residential air sealing project. The following formula shall be used to calculate deemed energy savings for infiltration efficiency improvements.

$$\text{Deemed Energy Savings} = \Delta\text{CFM}_{50} \times (V_{E,C} \times \text{CAF} + V_{E,H})$$

Equation 75

Where:

ΔCFM_{50}	=	Air infiltration reduction in Cubic Feet per Minute at 50 Pascal
$V_{E,C}$	=	Corresponding cooling savings value in Table 2-193
CAF	=	Cooling savings adjustment factor for homes with room air conditioners; set to 1.0 for homes with refrigerated air or set to 0.6 for homes with one or more room air conditioners
$V_{E,H}$	=	Corresponding heating savings value in Table 2-193

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying $V_{E,C}$ in Table 2-193 by a factor of 0.6.

¹⁸⁵ Model testing indicates a straight line relationship between demand and energy savings achieved and CFM₅₀ reductions is appropriate with beginning and ending leakage rates within the ranges permitted by the measure.

Table 2-193: Energy Savings V_E per CFM_{50} Reduction

Climate Zone	$V_{E,C}$: Cooling Savings	$V_{E,H}$: Heating Savings		
	Refrigerated Air	Gas Heat	Electric Resistance	Heat Pump
Zone 1: Panhandle	0.12	0.09	1.92	0.78
Zone 2: North	0.27	0.04	1.10	0.45
Zone 3: South	0.22	0.02	0.63	0.25
Zone 4: Valley	0.39	0.02	0.55	0.21
Zone 5: West*	0.07	0.03	0.88	0.34

Deemed Summer Demand Savings Tables

Table 2-194 presents the summer peak demand savings per CFM_{50} reduction for a residential air sealing project. The following formula shall be used to calculate deemed summer demand savings for air infiltration improvements.

$$\text{Deemed Summer Demand Savings} = \Delta CFM_{50} \times V_S \times CAF$$

Equation 76

Where:

- ΔCFM_{50} = Air infiltration reduction in Cubic Feet per Minute at 50 Pascal
- V_S = Corresponding value in Table 2-194
- CAF = Cooling savings adjustment factor for homes with room air conditioners; set to 1.0 for homes with refrigerated air or set to 0.6 for homes with one or more room air conditioners

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying $V_{E,C}$ in Table 2-194 by a factor of 0.6.

Table 2-194: Peak Summer Demand Savings V_S per CFM_{50} Reduction

Region	Summer kW Impact per CFM_{50} Reduction
Climate Zone 1: Panhandle	1.64E-04
Climate Zone 2: North	2.10E-04
Climate Zone 3: South	1.90E-04
Climate Zone 4: Valley	2.24E-04
Climate Zone 5: West	9.40E-05

Deemed Winter Demand Savings Tables

Table 2-195 presents the summer peak demand savings per CFM₅₀ reduction for a residential air sealing project. The following formula shall be used to calculate deemed winter demand savings for air infiltration improvement:

$$\text{Deemed Winter Demand Savings} = \Delta CFM_{50} \times V_W$$

Equation 77

Where:

ΔCFM_{50} = Air infiltration reduction in Cubic Feet per Minute at 50 Pascal

V_W = Corresponding value in Table 2-195

Table 2-195: Peak Winter Demand Savings V_W per CFM₅₀ Reduction

Region	Winter kW Impact per CFM ₅₀ Reduction	
	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	9.42E-04	5.48E-04
Climate Zone 2: North	1.25E-03	6.93E-04
Climate Zone 3: South	8.61E-04	4.41E-04
Climate Zone 4: Valley	7.81E-04	3.60E-04
Climate Zone 5: West	2.92E-04	1.19E-04

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Example Deemed Savings Calculation

Example 1. A contractor uses a blower door test to estimate 12,000 CFM₅₀ of pre-retrofit air leakage in a 2,200 square foot, 2-story, 3 bed-room home in Climate Zone 4 with a heat pump. The home is located in a well-shielded area. After identifying and sealing leaks, she performs another blower door test and measures 8,000 CFM₅₀ of air leakage.

$$\text{Max Initial Leakage Rate} = 5.2 \times 2,200 = 11,440 \text{ CFM}_{50}$$

$$\text{Reported Initial Leakage} = \text{Min}(12,000, 11,400) = 11,440 \text{ CFM}_{50}$$

$$\text{Capped Post Retrofit Leakage} = 11,400 \times (1 - 0.4) = 6,864 \text{ CFM}_{50}$$

$$\text{Reported Post Retrofit Leakage} = \text{Max}(8,000, 6,864) = 8,000 \text{ CFM}_{50}$$

$$\text{Min. Post Retrofit Leakage (safety)} = [0.03 \times 2,200 + 7.5 \times 4] \times 14.8 = 1,421 \text{ CFM}_{50}$$

$$\Delta CFM_{50} = (11,440 - 8,000) = 3,440$$

$$kWh \text{ savings} = (0.39 + 0.21) \times 3,440 = 2,064 kWh$$

$$\text{Summer kW savings} = 2.24 \times 10^{-4} \times 3,440 = 0.77 kW$$

$$\text{Winter kW savings} = 3.60 \times 10^{-4} \times 3,440 = 1.24 kW$$

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the DEER Final Report December 2008, the estimated useful life is 11 years for air infiltration reduction.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Pre-retrofit air infiltration in cubic feet per minute at 50 Pascal
- Post-retrofit air infiltration in cubic feet per minute at 50 Pascal
- Heating type (gas, resistance heat, heat pump)
- Square footage of the house
- Shielding level (well shielded, normal, exposed)
- Number of bedrooms
- Number of stories
- Number of occupants
- For RSOP homes that achieve a CFM reduction percentage of 30-40%: pictures capturing the scope/type of retrofit implemented and blower door test readings showing pre- and post-retrofit condition of the treated spot such as newly added door strip, caulking around window frame and recessed lighting fixtures.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 27903. Order Adopting New §25.184 as Approved at the August 21, 2003 Open Meeting and Submitted to the Secretary of State. Public Utility Commission of Texas.

- Docket No. 41070. Petition of El Paso Electric Company to Approve Revisions to Residential and Commercial Deemed Savings Based on Climate Data Specific to El Paso, Texas. Public Utility Commission of Texas.
- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-196: Air Infiltration Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language. Added detail on methodology and model characteristics.
v2.1	1/30/2015	TRM v2.1 update. Addition of language referring contractors to program manuals for information regarding health and safety precautions.
v3.0	4/10/2015	TRM v3.0 update. Revision of minimum ventilation requirements, pre-retrofit cap on infiltration levels, Climate Zone 5 savings values for homes with heat pumps, and tracking number of bedrooms and occupants in a house.
v3.1	11/05/2015	TRM v3.1 update. Provided clarification around effects of occupancy on minimum final ventilation.
v4.0	10/10/2016	TRM v4.0 update. Updated energy and demand savings per new prototype energy simulation models. Introduced new protocols related to maximum CFM reduction percentage and its associated documentation requirements. Added a new example for calculating savings.
v5.0	10/2017	TRM v5.0 update. Added alternative approach to bypass the need to complete leakage testing in guidance memo to follow.

2.3.2 Ceiling Insulation Measure Overview

TRM Measure ID: R-BE-CI

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling

Measure Description

Savings are estimated for insulation improvements to the ceiling area above a conditioned space in a residence.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. Homes must be centrally heated with either a furnace (gas or electric resistance) or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with gas or electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

Baseline Condition

Ceiling insulation levels encountered in existing homes can vary significantly, depending on factors such as the age of the home, type of insulation installed, and level of attic use (equipment, storage, etc.). Deemed savings have been developed based on different levels of encountered (existing) ceiling insulation in participating homes, ranging from no insulation material (R-0) to the equivalent of about 6 inches of fiberglass batt insulation (R-22). The current average ceiling insulation level at participating homes is to be determined and documented by the insulation installer. Degradation due to age and density of the existing insulation should be taken into account.

In the event that existing insulation is or has been removed during measure implementation, the existing R-value for claiming savings shall be based upon the R-value of the existing insulation prior to removal.

For any reported pre-retrofit R-value that falls below R-5, the TRM requires all contractors to provide sufficient evidence including two pictures: 1) a picture showing the entire attic floor, and 2) a close-up picture of a ruler that shows the measurement of the depth of the insulation. In the absence of evidence demonstrating pre-retrofit ceiling insulation below R-5, the lowest level of pre-retrofit ceiling insulation that can be claimed is the R-5 to R-8 range.

High-Efficiency Condition

A ceiling insulation level of R-30 is recommended throughout Texas as prescribed by the Department of Energy. Accordingly, deemed savings are provided for insulating to R-30. Adjustment factors are provided to allow contractors to estimate savings for installation of higher or lower levels of post-retrofit insulation: contractors should estimate post-retrofit R-value according to the average insulation depth achieved across the area treated and the R-per-inch of the insulation material installed.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings values. Specifically, these deemed savings estimates were developed using BEopt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: the default R-value of ceiling insulation (R-15 in most zones) was set at different levels, ranging from R-0 (no ceiling insulation) to R-22. These modifications are shown in Table 2-197.

The model runs are used to estimate peak demand and energy use in the modeled home at each of the base case ceiling insulation levels. The change-case models were run with the ceiling insulated to R-30.

Table 2-197: Residential Ceiling Insulation—Prototypical Home Characteristics

Shell Characteristic	Value	Source
Base Ceiling Insulation	R-0 R1-R4 R5-R8 R9-R14 R15-R22	Existing insulation level
Change Ceiling Insulation	R-30	Efficiency measure—R-30 retrofit insulation level as required by DOE and Texas Department of Housing and Community Affairs programs in Texas

Deemed Energy Savings Tables

Table 2-198 through Table 2-202 present the energy savings (kWh) associated with ceiling insulation for the five Texas climate zones. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-198 through Table 2-202 by a factor of 0.6.

Climate Zone 1: Panhandle Region

Table 2-198: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft)

Ceiling Insulation Base R-value	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	0.75	0.22	0.21	5.48	2.35
R-1 to R-4	0.62	0.18	0.18	4.60	1.97
R-5 to R-8	0.28	0.08	0.08	2.16	0.92
R-9 to R-14	0.15	0.04	0.05	1.17	0.50
R-15 to R-22	0.06	0.02	0.02	0.51	0.22

Climate Zone 2: North Region

Table 2-199: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)

Ceiling Insulation Base R-value	Cooling Savings	Heating Savings		
		Gas Heat	Electric Resistance	Heat Pump
R-0	1.23	0.12	3.40	1.41
R-1 to R-4	1.01	0.10	2.87	1.18
R-5 to R-8	0.46	0.05	1.34	0.55
R-9 to R-14	0.25	0.03	0.72	0.30
R-15 to R-22	0.11	0.01	0.32	0.13

Climate Zone 3: South Region

Table 2-200: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)

Ceiling Insulation Base R-value	Cooling Savings	Heating Savings		
		Gas Heat	Electric Resistance	Heat Pump
R-0	1.27	0.09	2.30	0.93
R-1 to R-4	1.04	0.07	1.96	0.79
R-5 to R-8	0.46	0.03	0.92	0.37
R-9 to R-14	0.24	0.02	0.50	0.20
R-15 to R-22	0.10	0.01	0.22	0.09

Climate Zone 4: Valley Region

Table 2-201: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)

Ceiling Insulation Base R-value	Cooling Savings	Heating Savings		
		Gas Heat	Electric Resistance	Heat Pump
R-0	1.00	0.04	1.60	0.62
R-1 to R-4	0.78	0.04	1.35	0.52
R-5 to R-8	0.35	0.02	0.62	0.24
R-9 to R-14	0.18	0.01	0.33	0.13
R-15 to R-22	0.08	0.00	0.14	0.06

Climate Zone 5: West Region

Table 2-202: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Ceiling Insulation to R-30 (kWh/sq. ft.)

Ceiling Insulation Base R-value	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	1.17	0.38	0.12	3.44	1.43
R-1 to R-4	0.96	0.32	0.10	2.95	1.22
R-5 to R-8	0.43	0.15	0.05	1.40	0.57
R-9 to R-14	0.23	0.08	0.03	0.75	0.31
R-15 to R-22	0.10	0.03	0.01	0.33	0.13

Scale Down/Up Factors for Energy Savings: Insulation to Below or Above R-30

The factors presented in this section are to be used when the average post-retrofit insulation depth is providing more or less than R-30 insulation. Scale down factors are provided for the case when average post-retrofit insulation depth is not sufficient to achieve R-30; scale up factors are provided for the case when insulating to a level greater than R-30. In either case, the following equation should be applied to scale down or scale up the energy savings.

$$\text{Energy Savings (kWh)} = \{R30 \text{ Savings}/ft^2 + [S_{D/U} \times (R_{Achieved} - 30)]\} \times A$$

Equation 78

Where:

$R30 \text{ Savings}/ft^2$	=	Sum of project-appropriate deemed Cooling and Heating Energy Savings per square feet taken from Table 2-203 through Table 2-202
$S_{D/U}$	=	Project-appropriate scale-down or scale-up factor from either Table 2-203 or Table 2-204
$R_{Achieved}$	=	Achieved R-value of installed insulation (e.g. for R-28, $R_{Achieved} = 28$)
A	=	Treated area (ft^2)

If the ceiling is insulated to a level less than R-30, the following factors shall be applied to scale down the achieved energy savings per square foot of treated ceiling area.

Table 2-203: Energy Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ΔR)

Climate Zone	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
1	4.00E-03	1.16E-03	1.27E-03	3.26E-02	1.38E-02
2	6.66E-03	n/a	7.11E-04	2.00E-02	8.20E-03
3	6.22E-03	n/a	4.67E-04	1.38E-02	5.47E-03
4	4.92E-03	n/a	2.44E-04	9.04E-03	3.47E-03
5	4.00E-03	1.16E-03	1.27E-03	3.26E-02	1.38E-02

If the ceiling is insulated to a level greater than R-30, the following factors shall be applied to scale up the achieved energy savings per square foot of treated ceiling area.

Table 2-204: Energy Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ΔR)

Climate Zone	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
1	2.66E-03	7.63E-04	8.45E-04	2.18E-02	9.18E-03
2	4.45E-03	n/a	4.82E-04	1.33E-02	5.47E-03
3	4.00E-03	n/a	2.97E-04	9.19E-03	3.66E-03
4	3.24E-03	n/a	1.62E-04	5.99E-03	2.30E-03
5	2.66E-03	7.63E-04	8.45E-04	2.18E-02	9.18E-03

Deemed Summer Demand Savings Tables

Table 2-205 through Table 2-209 present the summer demand savings (kW/sq. ft.) associated with ceiling insulation for the five Texas climate zones.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in the refrigerated air column in Table 2-205 through Table 2-209 by a factor of 0.6.

Climate Zone 1: Panhandle Region

Table 2-205: Climate Zone 1: Panhandle Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)

Ceiling Insulation Base R-value	Refrigerated Air	Evaporative Cooling
R-0	1.15E-03	3.44E-04
R-1 to R-4	9.78E-04	3.04E-04
R-5 to R-8	4.50E-04	1.47E-04
R-9 to R-14	2.33E-04	7.16E-05
R-15 to R-22	1.02E-04	2.87E-05

Climate Zone 2: North Region

Table 2-206: Climate Zone 2: North Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)

Ceiling Insulation Base R-value	Demand Savings (kW/sq. ft.)
R-0	1.27E-03
R-1 to R-4	1.10E-03
R-5 to R-8	5.17E-04
R-9 to R-14	2.67E-04
R-15 to R-22	1.15E-04

Climate Zone 3: South Region

Table 2-207: Climate Zone 3: South Region—Residential Ceiling Insulation to R-30 Conditioning Deemed Summer Demand Savings (kW/sq. ft.)

Ceiling Insulation Base R-value	Demand Savings (kW/sq. ft.)
R-0	1.44E-03
R-1 to R-4	1.21E-03
R-5 to R-8	5.51E-04
R-9 to R-14	2.87E-04
R-15 to R-22	1.22E-04

Climate Zone 4: Valley Region

Table 2-208: Climate Zone 4: Valley Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW/sq. ft.)

Ceiling Insulation Base R-value	Demand Savings (kW/sq. ft.)
R-0	8.70E-04
R-1 to R-4	7.16E-04
R-5 to R-8	3.40E-04
R-9 to R-14	1.79E-04
R-15 to R-22	7.95E-05

Climate Zone 5: West Region

Table 2-209: Climate Zone 5: West Region—Residential Ceiling Insulation to R-30 Deemed Summer Demand Savings (kW)

Ceiling Insulation Base R-value	Refrigerated Air	Evaporative Cooling
R-0	1.18E-03	3.33E-04
R-1 to R-4	1.01E-03	3.25E-04
R-5 to R-8	4.72E-04	1.53E-04
R-9 to R-14	2.38E-04	6.25E-05
R-15 to R-22	1.03E-04	2.09E-05

Scale Down/Up Factors: Insulation to Below or Above R-30

If the ceiling is insulated to a level less than R-30, the following factors shall be applied to scale down the achieved summer peak demand savings per square foot of treated ceiling area.

Table 2-210: Summer Peak Demand Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ΔR)

Climate Zone	Refrigerated Air	Evaporative Cooling
1	6.41E-06	1.97E-06
2	7.30E-06	n/a
3	7.91E-06	n/a
4	5.20E-06	n/a
5	6.41E-06	1.97E-06

If the ceiling is insulated to a level greater than R-30, the following factors shall be applied to scale up the achieved summer peak demand savings per square foot of treated ceiling area.

Table 2-211: Summer Peak Demand Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ΔR)

Climate Zone	Refrigerated Air	Evaporative Cooling
1	4.22E-06	1.89E-06
2	4.92E-06	n/a
3	5.92E-06	n/a
4	3.47E-06	n/a
5	4.22E-06	1.89E-06

Deemed Winter Demand Savings Tables

Table 2-212 through Table 2-216 present the winter demand savings associated with ceiling insulation for the five Texas climate zones.

Climate Zone 1: Panhandle Region

**Table 2-212: Climate Zone 1: Panhandle Region—
Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.)**

Ceiling Insulation Base R-value	Gas	Electric Resistance	Heat Pump
R-0	7.83E-05	2.25E-03	1.15E-03
R-1 to R-4	6.35E-05	1.90E-03	9.84E-04
R-5 to R-8	2.51E-05	8.74E-04	4.53E-04
R-9 to R-14	1.37E-05	4.56E-04	2.38E-04
R-15 to R-22	4.72E-06	1.95E-04	1.01E-04

Climate Zone 2: North Region

**Table 2-213: Climate Zone 2: North Region—
Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.)**

Ceiling Insulation Base R-value	Gas	Electric Resistance	Heat Pump
R-0	6.02E-05	2.49E-03	1.62E-03
R-1 to R-4	5.35E-05	2.11E-03	1.41E-03
R-5 to R-8	2.79E-05	9.84E-04	6.60E-04
R-9 to R-14	1.45E-05	5.13E-04	3.51E-04
R-15 to R-22	6.42E-06	2.23E-04	1.52E-04

Climate Zone 3: South Region

**Table 2-214: Climate Zone 3: South Region -
Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.)**

Ceiling Insulation Base R-value	Gas	Electric Resistance	Heat Pump
R-0	8.08E-05	1.96E-03	1.08E-03
R-1 to R-4	6.85E-05	1.65E-03	9.43E-04
R-5 to R-8	2.91E-05	7.71E-04	4.49E-04
R-9 to R-14	1.39E-05	4.01E-04	2.35E-04
R-15 to R-22	5.36E-06	1.74E-04	1.03E-04

Climate Zone 4: Valley Region

**Table 2-215: Climate Zone 4: Valley Region—
Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.)**

Ceiling Insulation Base R-value	Gas	Electric Resistance	Heat Pump
R-0	5.28E-05	1.60E-03	7.50E-04
R-1 to R-4	4.48E-05	1.36E-03	6.47E-04
R-5 to R-8	2.18E-05	6.31E-04	3.03E-04
R-9 to R-14	1.13E-05	3.28E-04	1.57E-04
R-15 to R-22	5.71E-06	1.44E-04	6.95E-05

Climate Zone 5: West Region

**Table 2-216: Climate Zone 5: West Region—
Residential Ceiling Insulation to R-30 Deemed Winter Demand Savings (kW/sq. ft.)**

Ceiling Insulation Base R-value	Gas	Electric Resistance	Heat Pump
R-0	3.28E-05	9.12E-04	3.91E-04
R-1 to R-4	2.56E-05	8.13E-04	3.45E-04
R-5 to R-8	1.14E-05	3.72E-04	1.57E-04
R-9 to R-14	5.38E-06	1.79E-04	7.54E-05
R-15 to R-22	2.26E-06	7.41E-05	3.11E-05

Scale Down/Up Factors for Demand Reduction: Insulation to Below or Above R-30

The factors presented in this section are to be used when the average post-retrofit insulation depth is providing more or less than R-30 insulation. Scale down factors are provided for the case when average post-retrofit insulation depth is not sufficient to achieve R-30; scale up factors are provided for the case when insulating to a level greater than R-30. In either case, the following equation should be applied to scale down or scale up the summer peak demand savings.

$$Demand\ Savings\ (kW) = \{R30\ Savings/ft^2 + [S_{D/U} \times (R_{Achieved} - 30)]\} \times A$$

Equation 79

Where:

$R30\ Savings/ft^2 =$ Sum of project-appropriate deemed Cooling and Heating Energy Savings per square feet taken from Table 2-205 through Table 2-209 or Table 2-212 through Table 2-216

- S_{DU} = Project-appropriate scale-down or scale-up factor from either Table 2-210 and Table 2-211 (Summer) or Table 2-217 and Table 2-218 (Winter)
- $R_{Achieved}$ = Achieved R-value of installed insulation (e.g. for R-28, $R_{Achieved} = 28$)
- A = Treated area (ft^2)

If the ceiling is insulated to a level less than R-30, the following factors shall be applied to scale down the achieved winter peak demand savings per square foot of treated ceiling area.

Table 2-217: Winter Peak Demand Scale Down Factors: Ceiling Insulation to less than R-30 (kWh/sq. ft./ ΔR)

Climate Zone	Gas Heat	Electric Resistance	Heat Pump
1	4.29E-07	1.21E-05	6.30E-06
2	3.97E-07	1.40E-05	9.55E-06
3	3.05E-07	1.10E-05	6.53E-06
4	3.19E-07	9.18E-06	4.32E-06
5	4.29E-07	1.21E-05	6.30E-06

If the ceiling is insulated to a level greater than R-30, the following factors shall be applied to scale up the achieved winter peak demand savings per square foot of treated ceiling area.

Table 2-218: Winter Peak Demand Scale Up Factors: Ceiling Insulation to greater than R-30 (kWh/sq. ft./ ΔR)

Climate Zone	Gas Heat	Electric Resistance	Heat Pump
1	2.76E-07	7.85E-06	4.19E-06
2	2.57E-07	8.33E-06	4.80E-06
3	2.19E-07	7.33E-06	4.46E-06
4	1.72E-07	5.79E-06	2.72E-06
5	2.76E-07	7.85E-06	4.19E-06

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Example Deemed Savings Calculation

Example 1 (Scale Up). A home in Climate Zone 5 with evaporative cooling and an electric resistance furnace insulates 400 square feet from a baseline of R-1 to an efficient condition of R-38.

$$\text{Cooling kWh savings per sq. ft.} = 0.32 + 7.63 \times 10^{-4} \times (38 - 30) = 0.33 \text{ kWh/sq. ft.}$$

$$\text{Heating kWh savings per sq. ft.} = 2.95 + 2.18 \times 10^{-2} \times (38 - 30) = 3.12 \text{ kWh/sq. ft.}$$

$$\text{kWh savings} = (0.33 + 3.12) \times 400 = 1,381 \text{ kWh}$$

$$\begin{aligned} \text{Summer kW savings per sq. ft.} &= 3.25 \times 10^{-4} + 1.89 \times 10^{-6} \times (38 - 30) \\ &= 3.41 \times 10^{-4} \text{ kW/sq. ft.} \end{aligned}$$

$$\text{Summer kW savings} = 3.41 \times 10^{-4} \times 400 = 0.14 \text{ kW}$$

$$\text{Winter kW savings per sq. ft.} = 8.13 \times 10^{-4} + 7.85 \times 10^{-5} \times (38 - 30) = 8.76 \times 10^{-4} \text{ kW/sq. ft.}$$

$$\text{Winter kW savings} = 8.76 \times 10^{-4} \times 400 = 0.35 \text{ kW}$$

Example 2 (Scale Down). A home in Climate Zone 3 with an air-source heat pump insulates 550 square feet from a baseline of R-5 to an efficient condition of R-28.

$$\text{Cooling kWh savings per sq. ft.} = 0.46 + 5.47 \times 10^{-3} \times (28 - 30) = 0.45 \text{ kWh/sq. ft.}$$

$$\text{Heating kWh savings per sq. ft.} = 0.37 + 3.66 \times 10^{-3} \times (28 - 30) = 0.36 \text{ kWh/sq. ft.}$$

$$\text{kWh savings} = (0.45 + 0.36) \times 550 = 446.4 \text{ kWh}$$

$$\begin{aligned} \text{Summer kW savings per sq. ft.} &= 5.51 \times 10^{-4} + 7.91 \times 10^{-6} \times (28 - 30) \\ &= 5.35 \times 10^{-4} \text{ kW/sq. ft.} \end{aligned}$$

$$\text{Summer kW savings} = 5.35 \times 10^{-4} \times 550 = 0.29 \text{ kW}$$

$$\begin{aligned} \text{Winter kW savings per sq. ft.} &= 4.49 \times 10^{-4} + 6.53 \times 10^{-6} \times (28 - 30) \\ &= 4.36 \times 10^{-4} \text{ kW/sq. ft.} \end{aligned}$$

$$\text{Winter kW savings} = 4.36 \times 10^{-4} \times 550 = 0.24 \text{ kW}$$

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007),¹⁸⁶ the Estimated Useful Life is 25 years for ceiling insulation.

Program Tracking Data and Evaluation Requirements

It is required that the following list of primary inputs and contextual data be specified and tracked by the program database to inform the evaluation and apply the savings properly:

- Climate zone
- Base R-value of original insulation
- R-value of installed insulation
- Space cooling system type (evaporative cooling, refrigerated air conditioning)
- Space heating system type (gas, electric, heat pump)
- Square footage of ceiling insulation installed above a conditioned space
- Only for homes with a reported baseline R-value that is less than R-5:

Two pictures: 1) a picture showing the entire attic floor, and 2) a close-up picture of a ruler that shows the measurement of the depth of the insulation.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 41070. Petition of El Paso Electric Company to Approve Revisions to Residential and Commercial Deemed Savings Based on Climate Data Specific to El Paso, Texas. Public Utility Commission of Texas.
- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

¹⁸⁶ GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007). http://library.cee1.org/sites/default/files/library/8842/CEE_Eval_MeasureLife_StudyLightsandHVACGDS_1Jun2007.pdf

Document Revision History

Table 2-219: Ceiling Insulation Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Added detail on methodology and model characteristics.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Provided savings tables for installation of insulation up to R-38. Multiplier provided to adjust cooling side savings for homes with evaporative cooling due to lower energy usage and demand associated with evaporative coolers relative to refrigerated air conditioning. Climate Zone 2 savings values awarded for Climate Zone 5 homes with heat pumps.
v3.1	11/05/2015	TRM v3.1 update. Provided example savings calculations. Clarified that no heating demand savings are to be claimed for homes with a gas furnace.
v4.0	10/10/2016	TRM v4.0 update. Updated energy and demand savings per new prototype simulation models and introduced new protocols for baseline and post-retrofit R-values, their associated savings estimations and documentation requirements.
v5.0	10/2017	TRM v5.0 update. No revision.

2.3.3 Attic Encapsulation Measure Overview

TRM Measure ID: R-BE-CI

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling.

Measure Description

Savings are estimated for bringing the attic into conditioned space by insulating and sealing the attic walls and roofs, eliminating leakage (to outside), and removing ceiling insulation, if present, to enhance air flow between the attic and the conditioned space directly below. Savings are presented to facilitate two modes of participation: with or without blower door testing.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. Homes must be centrally heated with either a furnace (gas or electric resistance) or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with gas or electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

Baseline Condition

The baseline condition is a vented, unfinished attic with some level of ceiling insulation. Ceiling insulation levels in existing construction can vary significantly, depending on the age of the home, type of insulation installed, and activity in the attic (such as using the attic for storage and HVAC equipment). Deemed savings have been developed based on different levels of encountered (existing) ceiling insulation in participating homes, ranging from no insulation material (R-0) to the equivalent of about 6 inches of fiberglass batt insulation (R-22). The

average ceiling insulation level prior to the retrofit for at participating homes is to be determined and documented by the contractor. Degradation due to age and density of the existing insulation should be taken into account.

In the event that existing ceiling insulation is or has been removed during measure implementation, the existing R-value will be based upon the R-value of the existing insulation prior to removal.

High-Efficiency Condition

Attic walls and roof deck are insulated to either R-19 or R-38. Closed cell spray foam is recommended. Vents are sealed, as are obvious leaks. Ceiling insulation between the attic and the conditioned space is removed.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings values. Specifically, these deemed savings estimates were developed using BEopt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: the default R-value of ceiling insulation (R-15 in most zones) was set at different levels, ranging from R-0 (no ceiling insulation) to R-22 to establish baseline energy use prior to encapsulation of the attic. These modifications are shown in Table 2-220.

The model runs calculated energy use for the prototypical home prior to encapsulating the attic. Next, change-case models were run to calculate energy use with the floor insulation measure in place with either R-30 or R-38 insulation.

Table 2-220: Residential Attic Encapsulation—Prototypical Home Characteristics

Shell Characteristic	Value	Source
Base Attic Encapsulation	Vented Attic R-0 R1-R4 R5-R8 R9-R14 R15-R22	Typical construction practice throughout the state
Change Attic Encapsulation with blower door test	Sealed attic with no ceiling insulation and either R-39 or R-38 roof deck insulation	

Shell Characteristic	Value	Source
Change Attic Encapsulation without blower door test	Sealed attic with no ceiling insulation and either R-39 or R-38 roof deck insulation 18 percent leakage reduction	Leakage Reduction: mean reduction achieved via attic encapsulation according to ACCA Manual J, 8 th Edition, Section 21-14 ¹⁸⁷

Deemed Energy Savings Tables

This measure may be performed with pre- and post-retrofit blower door testing when implementing the attic encapsulation measure, particularly when also undertaking additional leakage reduction activities when implementing this measure. Alternatively, the measure may also be implemented without performing blower door testing.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-221 through Table 2-230 by a factor of 0.6.

With Blower Door Testing

When performing blower door testing, claim attic encapsulation measure savings according to Table 2-221 through Table 2-225, which present the energy savings (kWh) associated with performing the attic encapsulation measure for the five Texas climate zones without taking into account leakage reduction. Additionally, savings can be claimed for leakage reduction based on the results of blower door testing according to the Air Infiltration measure earlier in the Building Envelope section. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types. Savings are per square foot of installed insulation.

¹⁸⁷ Section 21-14 of ACCA Manual J states that, "...a foam encapsulated attic eliminates ceiling leakage to the outdoors (i.e. to a vented attic), which means that the reduction in infiltration Cfm may range from 3 to 30 percent, with an 18 percent mean, as noted above". See Air Conditioning Contractors of America. Manual J, 8th Edition Version 2.10. Nov. 2011, p. 188.

Climate Zone 1: Panhandle Region

Table 2-221: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.56	0.21	0.19	4.21	1.80
R-1 to R-4	R-19	0.44	0.18	0.16	3.43	1.46
R-5 to R-8	R-19	0.14	0.09	0.08	1.24	0.52
R-9 to R-14	R-19	0.02	0.05	0.04	0.36	0.14
R-15 to R-22	R-19	-0.06	0.03	0.02	-0.23	-0.11
R-0	R-38	0.63	0.23	0.21	4.54	1.94
R-1 to R-4	R-38	0.52	0.20	0.18	3.76	1.60
R-5 to R-8	R-38	0.22	0.11	0.09	1.57	0.66
R-9 to R-14	R-38	0.10	0.08	0.06	0.69	0.28
R-15 to R-22	R-38	0.02	0.06	0.04	0.10	0.03

Climate Zone 2: North Region

Table 2-222: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.91	0.10	2.63	1.09
R-1 to R-4	R-19	0.71	0.08	2.15	0.88
R-5 to R-8	R-19	0.22	0.04	0.78	0.32
R-9 to R-14	R-19	0.03	0.02	0.23	0.09
R-15 to R-22	R-19	-0.10	0.01	-0.13	-0.06
R-0	R-38	1.04	0.11	2.83	1.17
R-1 to R-4	R-38	0.84	0.09	2.35	0.97
R-5 to R-8	R-38	0.35	0.05	0.98	0.40
R-9 to R-14	R-38	0.16	0.03	0.43	0.17
R-15 to R-22	R-38	0.04	0.01	0.07	0.02

Climate Zone 3: South Region

Table 2-223: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.96	0.08	1.81	0.73
R-1 to R-4	R-19	0.76	0.06	1.51	0.60
R-5 to R-8	R-19	0.24	0.03	0.58	0.23
R-9 to R-14	R-19	0.04	0.01	0.20	0.07
R-15 to R-22	R-19	-0.08	0.00	-0.05	-0.03
R-0	R-38	1.09	0.08	1.94	0.78
R-1 to R-4	R-38	0.88	0.07	1.64	0.65
R-5 to R-8	R-38	0.36	0.03	0.71	0.28
R-9 to R-14	R-38	0.17	0.02	0.33	0.13
R-15 to R-22	R-38	0.04	0.01	0.08	0.03

Climate Zone 4: Valley Region

Table 2-224: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.67	0.03	1.26	0.48
R-1 to R-4	R-19	0.48	0.03	1.04	0.40
R-5 to R-8	R-19	0.09	0.01	0.39	0.15
R-9 to R-14	R-19	-0.05	0.00	0.13	0.05
R-15 to R-22	R-19	-0.15	0.00	-0.04	-0.02
R-0	R-38	0.77	0.04	1.34	0.52
R-1 to R-4	R-38	0.58	0.03	1.12	0.43
R-5 to R-8	R-38	0.19	0.01	0.47	0.18
R-9 to R-14	R-38	0.05	0.01	0.21	0.08
R-15 to R-22	R-38	-0.05	0.00	0.04	0.01

Climate Zone 5: West Region

Table 2-225: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Attic Encapsulation with Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.90	0.37	0.10	2.71	1.13
R-1 to R-4	R-19	0.72	0.32	0.09	2.27	0.93
R-5 to R-8	R-19	0.25	0.16	0.04	0.89	0.36
R-9 to R-14	R-19	0.06	0.10	0.02	0.30	0.12
R-15 to R-22	R-19	-0.06	0.06	0.01	-0.07	-0.04
R-0	R-38	1.02	0.42	0.11	2.90	1.20
R-1 to R-4	R-38	0.84	0.36	0.10	2.46	1.01
R-5 to R-8	R-38	0.37	0.21	0.05	1.07	0.44
R-9 to R-14	R-38	0.19	0.15	0.03	0.49	0.20
R-15 to R-22	R-38	0.07	0.11	0.02	0.12	0.04

Without Blower Door Testing

Implementers choosing to perform the measure without performing blower door testing should claim attic encapsulation measure savings according to Table 2-226 through Table 2-230, which present the energy savings (kWh) associated with performing the attic encapsulation measure for the five Texas climate zones taking into account a mean leakage reduction of 18 percent. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types. Savings are per square foot of installed insulation.

Climate Zone 1: Panhandle Region

Table 2-226: Climate Zone 1: Panhandle Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.62	0.22	0.22	4.97	2.11
R-1 to R-4	R-19	0.50	0.19	0.19	4.15	1.75
R-5 to R-8	R-19	0.18	0.10	0.10	1.88	0.78
R-9 to R-14	R-19	0.06	0.06	0.07	0.96	0.38
R-15 to R-22	R-19	-0.02	0.04	0.04	0.34	0.12
R-0	R-38	0.70	0.25	0.24	5.31	2.26
R-1 to R-4	R-38	0.58	0.22	0.21	4.50	1.90
R-5 to R-8	R-38	0.26	0.13	0.12	2.22	0.92
R-9 to R-14	R-38	0.14	0.09	0.08	1.30	0.53
R-15 to R-22	R-38	0.06	0.07	0.06	0.69	0.27

Climate Zone 2: North Region

Table 2-227: Climate Zone 2: North Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	1.02	0.11	3.07	1.27
R-1 to R-4	R-19	0.82	0.10	2.57	1.05
R-5 to R-8	R-19	0.32	0.05	1.15	0.47
R-9 to R-14	R-19	0.12	0.03	0.58	0.23
R-15 to R-22	R-19	-0.01	0.02	0.20	0.07
R-0	R-38	1.16	0.12	3.28	1.35
R-1 to R-4	R-38	0.96	0.11	2.78	1.14
R-5 to R-8	R-38	0.45	0.06	1.36	0.55
R-9 to R-14	R-38	0.25	0.04	0.78	0.31
R-15 to R-22	R-38	0.12	0.02	0.40	0.16

Climate Zone 3: South Region

Table 2-228: Climate Zone 3: South Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	1.03	0.09	2.06	0.82
R-1 to R-4	R-19	0.81	0.07	1.74	0.70
R-5 to R-8	R-19	0.30	0.03	0.78	0.31
R-9 to R-14	R-19	0.09	0.02	0.39	0.15
R-15 to R-22	R-19	-0.04	0.01	0.13	0.05
R-0	R-38	1.17	0.09	2.20	0.88
R-1 to R-4	R-38	0.96	0.08	1.88	0.75
R-5 to R-8	R-38	0.45	0.04	0.92	0.37
R-9 to R-14	R-38	0.23	0.03	0.52	0.21
R-15 to R-22	R-38	0.10	0.02	0.27	0.10

Climate Zone 4: Valley Region

Table 2-229: Climate Zone 4: Valley Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings	Heating Savings		
			Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.82	0.04	1.48	0.57
R-1 to R-4	R-19	0.62	0.03	1.24	0.47
R-5 to R-8	R-19	0.21	0.02	0.57	0.22
R-9 to R-14	R-19	0.06	0.01	0.30	0.11
R-15 to R-22	R-19	-0.04	0.00	0.12	0.05
R-0	R-38	0.92	0.04	1.56	0.60
R-1 to R-4	R-38	0.72	0.04	1.33	0.51
R-5 to R-8	R-38	0.31	0.02	0.66	0.25
R-9 to R-14	R-38	0.16	0.01	0.38	0.15
R-15 to R-22	R-38	0.06	0.01	0.21	0.08

Climate Zone 5: West Region

Table 2-230: Climate Zone 5: West Region—Deemed Annual Energy Savings for Residential Attic Encapsulation without Blower Door Testing (kWh/sq. ft.)

Ceiling Insulation Base R-value	Change Case Roof Deck Insulation R-value	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
R-0	R-19	0.95	0.39	0.11	3.07	1.27
R-1 to R-4	R-19	0.76	0.34	0.10	2.61	1.07
R-5 to R-8	R-19	0.28	0.18	0.05	1.17	0.47
R-9 to R-14	R-19	0.09	0.11	0.03	0.57	0.22
R-15 to R-22	R-19	-0.03	0.07	0.02	0.19	0.06
R-0	R-38	1.08	0.44	0.12	3.26	1.35
R-1 to R-4	R-38	0.89	0.39	0.11	2.81	1.15
R-5 to R-8	R-38	0.41	0.23	0.06	1.37	0.55
R-9 to R-14	R-38	0.22	0.16	0.04	0.77	0.30
R-15 to R-22	R-38	0.10	0.12	0.02	0.38	0.15

Deemed Summer Demand Savings Tables

Summer demand savings are presented for those projects in which blower door testing is performed in conjunction with the measure and, subsequently, for those projects implemented without blower door testing.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate demand savings value in Table 2-231 through Table 2-240 by a factor of 0.6.

With Blower Door Testing

When performing blower door testing, claim attic encapsulation measure summer demand savings according to Table 2-231 through Table 2-235, which present the summer demand savings (kW) associated with attic encapsulation for the five Texas climate zones without taking into account leakage reduction. The savings in the tables are per square foot of installed insulation. Additionally, summer demand savings can be claimed for leakage reduction based on the results of blower door testing according to the Air Infiltration measure earlier in the Building Envelope section.

Climate Zone 1: Panhandle Region

Table 2-231: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	9.70E-04	4.01E-04	1.04E-03	4.04E-04
R-1 to R-4	8.16E-04	3.66E-04	8.83E-04	3.69E-04
R-5 to R-8	3.44E-04	2.25E-04	4.11E-04	2.28E-04
R-9 to R-14	1.50E-04	1.57E-04	2.16E-04	1.61E-04
R-15 to R-22	3.29E-05	1.19E-04	9.93E-05	1.23E-04

Climate Zone 2: North Region

Table 2-232: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.06E-03	-	1.14E-03	-
R-1 to R-4	9.08E-04		9.89E-04	
R-5 to R-8	3.86E-04		4.68E-04	
R-9 to R-14	1.62E-04		2.44E-04	
R-15 to R-22	2.63E-05		1.08E-04	

Climate Zone 3: South Region

Table 2-233: Climate Zone 3: South Region—Residential Attic Encapsulation Conditioning Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.26E-03	-	1.35E-03	-
R-1 to R-4	1.06E-03		1.14E-03	
R-5 to R-8	4.65E-04		5.51E-04	
R-9 to R-14	2.29E-04		3.15E-04	
R-15 to R-22	8.20E-05		1.68E-04	

Climate Zone 4: Valley Region

Table 2-234: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	7.44E-04	-	7.99E-04	-
R-1 to R-4	6.06E-04		6.61E-04	
R-5 to R-8	2.69E-04		3.25E-04	
R-9 to R-14	1.25E-04		1.81E-04	
R-15 to R-22	3.67E-05		9.19E-05	

Climate Zone 5: West Region

Table 2-235: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Summer Demand Savings with Blower Door Testing (kW)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.01E-03	3.22E-04	1.08E-03	3.44E-04
R-1 to R-4	8.58E-04	3.15E-04	9.32E-04	3.38E-04
R-5 to R-8	3.74E-04	1.62E-04	4.48E-04	1.84E-04
R-9 to R-14	1.64E-04	8.02E-05	2.38E-04	1.02E-04
R-15 to R-22	4.29E-05	4.29E-05	1.17E-04	6.52E-05

Without Blower Door Testing

Implementers choosing to perform the measure without performing blower door testing should claim attic encapsulation measure savings according to Table 2-236 through Table 2-240, which present the summer demand savings (kW) associated with attic encapsulation for the five Texas climate zones, taking into account a mean leakage reduction of 18 percent. Savings are presented per square foot of installed insulation.

Climate Zone 1: Panhandle Region

Table 2-236: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.07E-03	4.25E-04	1.14E-03	4.37E-04
R-1 to R-4	9.10E-04	3.87E-04	9.78E-04	3.99E-04
R-5 to R-8	4.16E-04	2.40E-04	4.84E-04	2.52E-04
R-9 to R-14	2.10E-04	1.71E-04	2.78E-04	1.84E-04
R-15 to R-22	8.92E-05	1.35E-04	1.57E-04	1.47E-04

Climate Zone 2: North Region

Table 2-237: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.16E-03	-	1.25E-03	-
R-1 to R-4	1.01E-03		1.10E-03	
R-5 to R-8	4.66E-04		5.56E-04	
R-9 to R-14	2.33E-04		3.23E-04	
R-15 to R-22	9.13E-05		1.81E-04	

Climate Zone 3: South Region

Table 2-238: Climate Zone 3: South Region—Residential Attic Encapsulation Conditioning Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.34E-03	-	1.46E-03	-
R-1 to R-4	1.12E-03		1.24E-03	
R-5 to R-8	5.53E-04		6.65E-04	
R-9 to R-14	2.84E-04		3.96E-04	
R-15 to R-22	1.31E-04		2.44E-04	

Climate Zone 4: Valley Region

Table 2-239: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	8.37E-04	-	8.95E-04	-
R-1 to R-4	6.94E-04		7.51E-04	
R-5 to R-8	3.44E-04		4.01E-04	
R-9 to R-14	1.94E-04		2.52E-04	
R-15 to R-22	1.02E-04		1.59E-04	

Climate Zone 5: West Region

Table 2-240: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Summer Demand Savings without Blower Door Testing (kW)

Ceiling Insulation Base R-value	R-19 Installed		R-38 Installed	
	Refrigerated Air	Evaporative Cooling	Refrigerated Air	Evaporative Cooling
R-0	1.08E-03	3.47E-04	1.15E-03	3.75E-04
R-1 to R-4	9.27E-04	3.40E-04	1.00E-03	3.68E-04
R-5 to R-8	4.24E-04	1.76E-04	4.98E-04	2.04E-04
R-9 to R-14	2.03E-04	9.49E-05	2.77E-04	1.23E-04
R-15 to R-22	8.01E-05	6.34E-05	1.54E-04	9.14E-05

Deemed Winter Demand Savings Tables

Winter demand savings are presented for those projects in which blower door testing is performed in conjunction with the measure and, subsequently, for those projects implemented without blower door testing.

With Blower Door Testing

When performing blower door testing, claim attic encapsulation measure winter demand savings according to Table 2-241 through Table 2-245, which present the winter demand savings (kW) associated with attic encapsulation for the five Texas climate zones without taking into account leakage reduction. The savings in the tables are per square foot of installed insulation. Additionally, winter demand savings can be claimed for leakage reduction based on the results of blower door testing according to the Air Infiltration measure earlier in the Building Envelope section.

Climate Zone 1: Panhandle Region

Table 2-241: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	7.75E-05	1.70E-03	8.70E-04	8.67E-05	1.82E-03	9.35E-04
R-1 to R-4	6.43E-05	1.39E-03	7.22E-04	7.34E-05	1.51E-03	7.87E-04
R-5 to R-8	2.99E-05	4.74E-04	2.47E-04	3.90E-05	5.94E-04	3.12E-04
R-9 to R-14	1.98E-05	1.00E-04	5.48E-05	2.89E-05	2.20E-04	1.20E-04
R-15 to R-22	1.17E-05	-1.34E-04	-6.79E-05	2.09E-05	-1.38E-05	-2.63E-06

Climate Zone 2: North Region

Table 2-242: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	4.97E-05	1.88E-03	1.21E-03	6.17E-05	2.01E-03	1.32E-03
R-1 to R-4	4.37E-05	1.55E-03	1.02E-03	5.57E-05	1.68E-03	1.13E-03
R-5 to R-8	2.08E-05	5.42E-04	3.55E-04	3.28E-05	6.70E-04	4.64E-04
R-9 to R-14	8.86E-06	1.21E-04	7.86E-05	2.09E-05	2.50E-04	1.87E-04
R-15 to R-22	1.59E-06	-1.39E-04	-9.90E-05	1.36E-05	-1.02E-05	9.55E-06

Climate Zone 3: South Region

Table 2-243: Climate Zone 3: South Region -Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	8.71E-05	1.59E-03	8.78E-04	9.55E-05	1.68E-03	9.34E-04
R-1 to R-4	7.61E-05	1.32E-03	7.58E-04	8.46E-05	1.41E-03	8.14E-04
R-5 to R-8	4.08E-05	5.29E-04	3.16E-04	4.93E-05	6.20E-04	3.72E-04
R-9 to R-14	2.73E-05	1.98E-04	1.25E-04	3.57E-05	2.89E-04	1.81E-04
R-15 to R-22	1.96E-05	-4.36E-06	6.84E-06	2.81E-05	8.67E-05	6.31E-05

Climate Zone 4: Valley Region

Table 2-244: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	4.67E-05	1.31E-03	6.23E-04	4.94E-05	1.38E-03	6.55E-04
R-1 to R-4	3.95E-05	1.10E-03	5.31E-04	4.21E-05	1.16E-03	5.63E-04
R-5 to R-8	1.90E-05	4.40E-04	2.24E-04	2.16E-05	5.08E-04	2.56E-04
R-9 to R-14	9.58E-06	1.69E-04	9.26E-05	1.22E-05	2.37E-04	1.25E-04
R-15 to R-22	4.57E-06	4.16E-06	1.43E-05	7.20E-06	7.22E-05	4.64E-05

Climate Zone 5: West Region

Table 2-245: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Winter Demand Savings with Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	2.57E-05	6.66E-04	2.83E-04	3.08E-05	6.87E-04	2.92E-04
R-1 to R-4	1.93E-05	5.77E-04	2.42E-04	2.44E-05	5.98E-04	2.51E-04
R-5 to R-8	6.56E-06	1.83E-04	7.34E-05	1.17E-05	2.04E-04	8.31E-05
R-9 to R-14	1.18E-06	9.88E-06	5.10E-08	6.30E-06	3.09E-05	9.74E-06
R-15 to R-22	-1.60E-06	-8.35E-05	-3.96E-05	3.51E-06	-6.25E-05	-2.99E-05

Without Blower Door Testing

Implementers choosing to perform the measure without performing blower door testing should claim attic encapsulation measure winter demand savings according to Table 2-246 through Table 2-250, which present the winter demand savings (kW) associated with attic encapsulation for the five Texas climate zones, taking into account a mean leakage reduction of 18 percent. Savings are presented per square foot of installed insulation.

Climate Zone 1: Panhandle Region

Table 2-246: Climate Zone 1: Panhandle Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	9.00E-05	2.05E-03	1.07E-03	9.98E-05	2.18E-03	1.14E-03
R-1 to R-4	7.95E-05	1.73E-03	9.16E-04	8.94E-05	1.86E-03	9.84E-04
R-5 to R-8	4.60E-05	7.78E-04	4.23E-04	5.58E-05	9.03E-04	4.91E-04
R-9 to R-14	2.99E-05	3.89E-04	2.23E-04	3.97E-05	5.14E-04	2.91E-04
R-15 to R-22	2.47E-05	1.46E-04	9.57E-05	3.45E-05	2.71E-04	1.64E-04

Climate Zone 2: North Region

Table 2-247: Climate Zone 2: North Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	6.93E-05	2.34E-03	1.47E-03	8.83E-05	2.48E-03	1.58E-03
R-1 to R-4	6.46E-05	1.99E-03	1.28E-03	8.36E-05	2.13E-03	1.39E-03
R-5 to R-8	3.38E-05	9.43E-04	5.81E-04	5.28E-05	1.09E-03	6.94E-04
R-9 to R-14	2.15E-05	5.05E-04	2.94E-04	4.05E-05	6.48E-04	4.06E-04
R-15 to R-22	1.34E-05	2.35E-04	1.09E-04	3.24E-05	3.78E-04	2.22E-04

Climate Zone 3: South Region

Table 2-248: Climate Zone 3: South Region -Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	9.82E-05	1.92E-03	1.04E-03	1.06E-04	2.01E-03	1.10E-03
R-1 to R-4	8.63E-05	1.63E-03	9.20E-04	9.41E-05	1.73E-03	9.75E-04
R-5 to R-8	4.91E-05	7.97E-04	4.59E-04	5.68E-05	8.96E-04	5.14E-04
R-9 to R-14	3.45E-05	4.52E-04	2.60E-04	4.23E-05	5.51E-04	3.15E-04
R-15 to R-22	2.58E-05	2.41E-04	1.38E-04	3.35E-05	3.40E-04	1.94E-04

Climate Zone 4: Valley Region

Table 2-249: Climate Zone 4: Valley Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	5.51E-05	1.59E-03	7.49E-04	5.78E-05	1.66E-03	7.83E-04
R-1 to R-4	4.76E-05	1.37E-03	6.53E-04	5.03E-05	1.44E-03	6.87E-04
R-5 to R-8	2.63E-05	6.88E-04	3.34E-04	2.89E-05	7.59E-04	3.67E-04
R-9 to R-14	1.65E-05	4.07E-04	1.98E-04	1.91E-05	4.78E-04	2.31E-04
R-15 to R-22	1.13E-05	2.36E-04	1.17E-04	1.39E-05	3.06E-04	1.50E-04

Climate Zone 5: West Region

Table 2-250: Climate Zone 5: West Region—Residential Attic Encapsulation Deemed Winter Demand Savings without Blower Door Testing (kW/sq. ft.)

Ceiling Insulation Base R-value	R-19 Installed			R-38 Installed		
	Gas	Electric Resistance	Heat Pump	Gas	Electric Resistance	Heat Pump
R-0	2.86E-05	7.84E-04	3.31E-04	3.33E-05	8.07E-04	3.41E-04
R-1 to R-4	2.21E-05	6.92E-04	2.88E-04	2.68E-05	7.15E-04	2.99E-04
R-5 to R-8	8.72E-06	2.85E-04	1.14E-04	1.35E-05	3.08E-04	1.25E-04
R-9 to R-14	3.25E-06	1.07E-04	3.83E-05	7.98E-06	1.30E-04	4.91E-05
R-15 to R-22	3.30E-07	7.57E-06	-3.97E-06	5.07E-06	3.05E-05	6.78E-06

Examples

Example 1. A contractor seals the attic and adds 900 square feet of R-38 insulation to the underside of the roof to a home in Climate Zone 3 with refrigerated air and a gas furnace, which has existing ceiling insulation estimated at R-7. The contractor does not perform a blower door test.

$$kWh \text{ savings} = (0.45 + 0.04) \times 900 = 405 \text{ kWh}$$

$$\text{Summer kW savings} = 6.65 \times 10^{-4} \times 900 = 0.60 \text{ kW}$$

$$\text{Winter kW savings} = 5.68 \times 10^{-5} \times 900 = 0.05 \text{ kW}$$

Example 2. A contractor seals the attic and adds 1,200 square feet of R-38 insulation to the underside of the roof to a home in Climate Zone 4 with an air-source heat pump in which existing ceiling insulation is demonstrated to be only R-4. The contractor performs a blower door test and claims blower door savings according to the testing results and instructions provided in the air infiltration measure.

$$kWh\ savings = (0.58 + 0.43) \times 1,200 = 1,207.2\ kWh$$

$$Summer\ kW\ savings = 6.61 \times 10^{-4} \times 1,200 = 0.79\ kW$$

$$Winter\ kW\ savings = 5.63 \times 10^{-4} \times 1,200 = 0.68\ kW$$

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007),¹⁸⁸ the Estimated Useful Life is 25 years for ceiling insulation. The measure life specified for ceiling insulation is also appropriate for attic encapsulation.

Program Tracking Data and Evaluation Requirements

It is required that the following list of primary inputs and contextual data be specified and tracked by the program database to inform the evaluation and apply the savings properly:

- Climate zone
- Base R-value of original insulation
- R-value of installed insulation
- Space cooling system type (evaporative cooling, refrigerated air conditioning)
- Space heating system type (gas, electric, heat pump)
- Square footage of ceiling separating the encapsulated attic from conditioned space

¹⁸⁸ GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007). http://library.cee1.org/sites/default/files/library/8842/CEE_Eval_MeasureLife_StudyLightsandHVACGDS_1Jun2007.pdf

References and Efficiency Standards

Petitions and Rulings

- 10/2017

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-251: Attic Encapsulation Revision History

TRM Version	Date	Description of Change
v4.0	10/10/2016	TRM v4.0 origin.
v5.0	10/2017	TRM v5.0 update. Incorporated alternative savings path that includes savings for infiltration reduction.

2.3.4 Wall Insulation Measure Overview

TRM Measure ID: R-BE-WI

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling and Engineering Estimates.

Measure Description

Wall insulation is added to the walls surrounding conditioned space in existing homes, either by removing wall enclosures and applying batt or spray insulation, or by otherwise filling (e.g. blowing loose insulation into) the cavity space between studs in the walls of existing homes. Walls may be either 2x4 or 2x6 construction. Savings are estimated for filling the wall cavities of 2x4 or 2x6 walls with fiberglass batts, cellulose, or closed-cell spray foam, and are presented per square foot of treated wall area (gross wall area less window and door area).

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. Homes must be centrally heated with either a furnace (gas or electric resistance) or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with gas or electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

Refer to the Baseline Condition section below for eligibility criteria regarding pre-retrofit level of wall insulation.

Baseline Condition

The baseline is considered to be a house with little or no wall insulation in the wall cavity. For those homes for which a minimal level of insulation is encountered, baseline is established at R-4. This baseline should be used to represent homes for which installed insulation covers a very limited amount of the wall area to be treated, is significantly degraded, and/or is less than an inch thick. Homes with more than this base level of insulation are not eligible for the measure.

Baseline homes may have either 2x4 or 2x6 construction.

High-Efficiency Condition

The standard throughout Texas for adding wall insulation to an existing wall cavity is R-13, as prescribed by United States Department of Energy (DOE) and Texas Department of Housing and Community Affairs (TDHCA) programs. The standard is achieved by filling a 2x4 wall cavity with fiberglass batt or cellulose insulation, which typically provides an R-value per inch (thickness) of between 3 and 4 hr·ft²·°F/BTU. Other wall insulation materials may be used, such as closed-cell spray foam, which approximately provides an R-value of 6 per inch.

As such, deemed savings are provided for insulating 2x4 and 2x6 walls to the levels presented in Table 2-252:

Table 2-252: High-Efficiency Condition R-Values for 2x4 and 2x6 Walls

Insulation Material	2x4 Wall	2x6 Wall
Fiberglass Batt or Cellulose	R-13	R-17
Closed-cell Spray Foam	R-21	R-33

Wall insulation reduces the ventilation rate in the home and therefore a post-installation blower door test must be conducted. Results must comply with the Minimum Final Ventilation Rate discussed in the High-Efficiency Condition section found in the Air Infiltration section of this document. This requirement applies to retrofits implemented under the HTR and RSOP programs.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings values. Specifically, these deemed savings estimates were developed using BEopt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: the default R-11 insulation was reduced to either R-0 or R-4.

The model runs calculated energy use for the prototypical home prior to the installation of the wall insulation measure. Next, change-case models were run to calculate energy use with the wall insulation measure in place.

Table 2-253: Residential Wall Insulation—Prototypical Home Characteristics, Climate Zones 1-4

Shell Characteristic	Value	Source
Base Wall Insulation	R-0 R-4	BEopt estimates wall assembly R-value for uninsulated walls to be 3.6 for 2x4 construction and 3.7 for 2x6 construction. Assembly R-values for R-4 walls are 6.7 and 7.1 for 2x4 and 2x6 construction, respectively. Listed base levels are for the insulation material only.
Change Wall Insulation 2x4 wall	R-13 R-21	For retrofit with fiberglass batt/cellulose and closed-cell spray foam, respectively.
Change Wall Insulation 2x6 wall	R-17 R-33	EF or retrofit with fiberglass batt/cellulose and closed-cell spray foam, respectively.

Deemed Energy Savings Tables

Savings are presented separately for insulating 2x4 wall construction and homes with 2x6 walls. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-254 through Table 2-257 by a factor of 0.6.

2x4 Walls

Table 2-254 presents the deemed energy savings values for insulating 2x4 walls to R-13 for all five Texas climate zones.

Table 2-254: Deemed Annual Energy Savings, Insulation of 2x4 Walls to R- 13 (kWh/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	0.50	0.17	0.18	3.96	1.67
Climate Zone 2: North		0.85	N/A	0.09	2.44	0.99
Climate Zone 3: South		0.90	N/A	0.07	1.67	0.66
Climate Zone 4: Valley		0.53	N/A	0.04	1.19	0.45
Climate Zone 5: West		0.76	0.29	0.09	2.40	0.98
Climate Zone 1: Panhandle	R-4	0.18	0.06	0.07	1.52	0.64
Climate Zone 2: North		0.32	N/A	0.04	0.93	0.38
Climate Zone 3: South		0.33	N/A	0.03	0.64	0.25
Climate Zone 4: Valley		0.19	N/A	0.01	0.45	0.17
Climate Zone 5: West		0.28	0.11	0.03	0.92	0.37

Table 2-255 presents the deemed energy savings values for insulating 2x4 walls to R-21 for all five Texas climate zones.

Table 2-255: Deemed Annual Energy Savings, Insulation of 2x4 Walls to R-21 (kWh/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	0.56	0.18	0.20	4.44	1.87
Climate Zone 2: North		0.95	N/A	0.10	2.73	1.11
Climate Zone 3: South		1.01	N/A	0.08	1.88	0.74
Climate Zone 4: Valley		0.59	N/A	0.04	1.33	0.50
Climate Zone 5: West		0.85	0.33	0.10	2.69	1.09
Climate Zone 1: Panhandle	R-4	0.24	0.08	0.09	2.00	0.84
Climate Zone 2: North		0.42	N/A	0.05	1.23	0.50
Climate Zone 3: South		0.43	N/A	0.03	0.84	0.33
Climate Zone 4: Valley		0.26	N/A	0.02	0.59	0.22
Climate Zone 5: West		0.37	0.14	0.05	1.20	0.49

2x6 Walls

Table 2-256 presents the deemed energy savings values for insulating 2x6 walls to R-17 for all five Texas climate zones.

Table 2-256: Deemed Annual Energy Savings, Insulation of 2x6 Walls to R-17 (kWh/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	0.53	0.18	0.19	4.27	1.80
Climate Zone 2: North		0.91	N/A	0.10	2.63	1.07
Climate Zone 3: South		0.97	N/A	0.08	1.81	0.71
Climate Zone 4: Valley		0.56	N/A	0.04	1.27	0.48
Climate Zone 5: West		0.81	0.31	0.10	2.58	1.05
Climate Zone 1: Panhandle	R-4	0.22	0.07	0.08	1.81	0.76
Climate Zone 2: North		0.38	N/A	0.04	1.11	0.45
Climate Zone 3: South		0.39	N/A	0.03	0.76	0.30
Climate Zone 4: Valley		0.23	N/A	0.02	0.53	0.20
Climate Zone 5: West		0.33	0.13	0.04	1.08	0.44

Table 2-257 presents the deemed energy savings values for insulating 2x6 walls to R-33 for all five Texas climate zones.

Table 2-257: Deemed Annual Energy Savings, Insulation of 2x6 Walls to R-33 (kWh/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Savings		Heating Savings		
		Refrigerated Air	Evaporative Cooling	Gas	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	0.59	0.20	0.22	4.79	2.01
Climate Zone 2: North		1.01	N/A	0.11	2.94	1.20
Climate Zone 3: South		1.07	N/A	0.09	2.02	0.80
Climate Zone 4: Valley		0.62	N/A	0.04	1.42	0.54
Climate Zone 5: West		0.90	0.35	0.11	2.88	1.17
Climate Zone 1: Panhandle	R-4	0.28	0.09	0.11	2.33	0.98
Climate Zone 2: North		0.48	N/A	0.05	1.42	0.58
Climate Zone 3: South		0.49	N/A	0.04	0.98	0.38
Climate Zone 4: Valley		0.29	N/A	0.02	0.67	0.25
Climate Zone 5: West		0.42	0.16	0.05	1.38	0.56

Deemed Summer Demand Savings Tables

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-258 through Table 2-261 by a factor of 0.6.

2x4 Walls

Table 2-258 presents the deemed summer demand savings values for insulating 2x4 walls to R-13 for all five Texas climate zones.

Table 2-258: Deemed Summer Demand Savings, Insulation of 2x4 Walls to R-13 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Type	
		Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	Uninsulated	6.41E-04	2.40E-04
Climate Zone 2: North		7.32E-04	N/A
Climate Zone 3: South		8.50E-04	N/A
Climate Zone 4: Valley		4.17E-04	N/A
Climate Zone 5: West		6.52E-04	2.00E-04
Climate Zone 1: Panhandle	R-4	2.35E-04	9.16E-05
Climate Zone 2: North		2.70E-04	N/A
Climate Zone 3: South		3.02E-04	N/A
Climate Zone 4: Valley		1.55E-04	N/A
Climate Zone 5: West		2.43E-04	7.40E-05

Table 2-259 presents the deemed summer demand savings values for insulating 2x4 walls to R-13 for all five Texas climate zones.

Table 2-259: Deemed Summer Demand Savings, Insulation of 2x4 Walls to R-21 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Type	
		Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	Uninsulated	7.34E-04	2.66E-04
Climate Zone 2: North		8.16E-04	N/A
Climate Zone 3: South		9.55E-04	N/A
Climate Zone 4: Valley		4.69E-04	N/A
Climate Zone 5: West		7.32E-04	2.23E-04
Climate Zone 1: Panhandle	R-4	3.29E-04	1.18E-04
Climate Zone 2: North		3.55E-04	N/A
Climate Zone 3: South		4.08E-04	N/A
Climate Zone 4: Valley		2.07E-04	N/A
Climate Zone 5: West		3.24E-04	9.68E-05

2x6 Walls

Table 2-260 presents the deemed summer demand savings values for insulating 2x6 walls to R-17 for all five Texas climate zones.

Table 2-260: Deemed Summer Demand Savings, Insulation of 2x6 Walls to R-17 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Type	
		Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	Uninsulated	7.00E-04	2.59E-04
Climate Zone 2: North		7.87E-04	N/A
Climate Zone 3: South		9.20E-04	N/A
Climate Zone 4: Valley		4.56E-04	N/A
Climate Zone 5: West		7.06E-04	2.14E-04
Climate Zone 1: Panhandle	R-4	2.88E-04	1.06E-04
Climate Zone 2: North		3.19E-04	N/A
Climate Zone 3: South		3.67E-04	N/A
Climate Zone 4: Valley		1.88E-04	N/A
Climate Zone 5: West		2.91E-04	8.44E-05

Table 2-261 presents the deemed summer demand savings values for insulating 2x6 walls to R-33 for all five Texas climate zones.

Table 2-261: Deemed Summer Demand Savings, Insulation of 2x6 Walls to R-33 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Cooling Type	
		Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	Uninsulated	7.76E-04	2.83E-04
Climate Zone 2: North		8.77E-04	N/A
Climate Zone 3: South		1.02E-03	N/A
Climate Zone 4: Valley		5.08E-04	N/A
Climate Zone 5: West		7.80E-04	2.38E-04
Climate Zone 1: Panhandle	R-4	3.64E-04	1.30E-04
Climate Zone 2: North		4.09E-04	N/A
Climate Zone 3: South		4.64E-04	N/A
Climate Zone 4: Valley		2.40E-04	N/A
Climate Zone 5: West		3.65E-04	1.08E-04

Deemed Winter Demand Savings

2x4 Walls

Table 2-262 presents the deemed winter demand savings values for insulating 2x4 walls to R-13 for all five Texas climate zones.

Table 2-262: Deemed Winter Demand Savings, Insulation of 2x4 Walls to R-13 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	6.93E-05	1.71E-03	8.78E-04
Climate Zone 2: North		6.66E-05	1.96E-03	1.30E-03
Climate Zone 3: South		7.49E-05	1.48E-03	8.39E-04
Climate Zone 4: Valley		4.28E-05	1.22E-03	5.78E-04
Climate Zone 5: West		2.06E-05	6.78E-04	2.84E-04
Climate Zone 1: Panhandle	R-4	2.58E-05	6.20E-04	3.19E-04
Climate Zone 2: North		2.46E-05	7.32E-04	4.94E-04
Climate Zone 3: South		2.61E-05	5.50E-04	3.20E-04
Climate Zone 4: Valley		1.61E-05	4.51E-04	2.13E-04
Climate Zone 5: West		6.23E-06	2.23E-04	9.39E-05

Table 2-263 presents the deemed winter demand savings values for insulating 2x4 walls to R-21 for all five Texas climate zones.

Table 2-263: Deemed Winter Demand Savings, Insulation of 2x4 Walls to R-17 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	7.69E-05	1.89E-03	9.75E-04
Climate Zone 2: North		7.41E-05	2.18E-03	1.46E-03
Climate Zone 3: South		8.19E-05	1.65E-03	9.40E-04
Climate Zone 4: Valley		4.78E-05	1.36E-03	6.41E-04
Climate Zone 5: West		2.24E-05	7.37E-04	3.10E-04
Climate Zone 1: Panhandle	R-4	3.34E-05	8.06E-04	4.16E-04
Climate Zone 2: North		3.20E-05	9.57E-04	6.50E-04
Climate Zone 3: South		3.31E-05	7.19E-04	4.21E-04
Climate Zone 4: Valley		2.11E-05	5.88E-04	2.77E-04
Climate Zone 5: West		8.01E-06	2.83E-04	1.20E-04

2x6 Walls

Table 2-264 presents the deemed winter demand savings values for insulating 2x6 walls to R-17 for all five Texas climate zones.

Table 2-264: Deemed Winter Demand Savings, Insulation of 2x6 Walls to R-17 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	6.99E-05	1.76E-03	9.09E-04
Climate Zone 2: North		7.01E-05	2.07E-03	1.40E-03
Climate Zone 3: South		7.86E-05	1.57E-03	9.10E-04
Climate Zone 4: Valley		4.58E-05	1.29E-03	6.08E-04
Climate Zone 5: West		1.84E-05	6.24E-04	2.64E-04
Climate Zone 1: Panhandle	R-4	2.68E-05	6.93E-04	3.58E-04
Climate Zone 2: North		2.84E-05	8.49E-04	5.84E-04
Climate Zone 3: South		2.96E-05	6.40E-04	3.82E-04
Climate Zone 4: Valley		1.90E-05	5.19E-04	2.41E-04
Climate Zone 5: West		5.59E-06	2.06E-04	8.81E-05

Table 2-265 presents the deemed winter demand savings values for insulating 2x6 walls to R-33 for all five Texas climate zones.

Table 2-265: Deemed Winter Demand Savings, Insulation of 2x6 Walls to R-33 (kW/sq. ft.)

Climate Zone	Base Case Wall Insulation	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	Uninsulated	7.66E-05	1.95E-03	1.00E-03
Climate Zone 2: North		7.77E-05	2.31E-03	1.56E-03
Climate Zone 3: South		8.62E-05	1.75E-03	1.02E-03
Climate Zone 4: Valley		5.11E-05	1.43E-03	6.73E-04
Climate Zone 5: West		1.96E-05	6.66E-04	2.82E-04
Climate Zone 1: Panhandle	R-4	3.35E-05	8.76E-04	4.53E-04
Climate Zone 2: North		3.60E-05	1.08E-03	7.44E-04
Climate Zone 3: South		3.72E-05	8.17E-04	4.92E-04
Climate Zone 4: Valley		2.43E-05	6.59E-04	3.06E-04
Climate Zone 5: West		6.87E-06	2.48E-04	1.06E-04

Examples

Example 1. A home with uninsulated 2x4 walls in Climate Zone 1 with evaporative cooling and an electric resistance furnace insulates 750 square feet to R-13 with fiberglass batt insulation.

$$kWh \text{ savings} = (0.17 + 3.96) \times 750 = 3,091.5 kWh$$

$$\text{Summer kW savings} = 2.40 \times 10^{-4} \times 750 = 0.18 kW$$

$$\text{Winter kW savings} = 1.71 \times 10^{-3} \times 750 = 1.28 kW$$

Example 2. A home in Climate Zone 4 with uninsulated 2x6 walls with a central air conditioning unit and a gas furnace insulates 500 square feet to R-17 with closed-cell spray foam.

$$kWh \text{ savings} = (0.56 + 0.04) \times 500 = 300.0 kWh$$

$$\text{Summer kW savings} = 4.56 \times 10^{-4} \times 500 = 0.23 kW$$

$$\text{Winter kW savings} = 4.58 \times 10^{-5} \times 500 = 0.02 kW$$

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007), the Estimated Useful Life is 25 years for wall insulation.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Space heating system type (gas, electric, heat pump)
- Space cooling system type (evaporative cooling, refrigerated air conditioning)
- Square footage of retrofitted wall area (gross wall area excluding window and door area)

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 58. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 41070. Petition of El Paso Electric Company to Approve Revisions to Residential and Commercial Deemed Savings Based on Climate Data Specific to El Paso, Texas. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-266: Wall Insulation Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Added detail on methodology and model characteristics.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Multiplier provided to adjust cooling side savings for homes with evaporative cooling due to lower energy usage and demand associated with evaporative coolers relative to refrigerated air. Climate Zone 2 savings values awarded for Climate Zone 5 homes with heat pumps.
v3.1	11/05/2015	TRM v3.1 update. Provided example savings calculations.
v4.0	8/31/2016	TRM v4.0 update. Updated energy and demand savings per new prototype energy simulation models. Added separate savings for 2x4 and 2x6 wall framing and for homes with central AC versus evaporative cooling. Added a two-tier baseline definition of R-0 and R-4.
v5.0	10/2017	TRM v5.0 update. Make explicit allowance for cellulose insulation.

2.3.5 Floor Insulation Measure Overview

TRM Measure ID: R-BE-FI

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling.

Measure Description

Floor insulation is installed on the underside of floor areas sitting below conditioned space. Typically, it is installed in ventilated crawlspaces. Savings are presented per square foot of treated floor area.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. Homes must be centrally heated with either an electric resistance furnace or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

Homes with gas heating are disqualified for adding floor insulation since this may result in an energy penalty due to floors not getting cooled from the ground during summer.

Baseline Condition

The baseline is considered to be a house with pier and beam construction and no floor insulation against the floor of conditioned area.

High-Efficiency Condition

A floor insulation level of R-19 is recommended for site-built homes throughout Texas as prescribed by DOE and Texas Department of Housing and Community Affairs (TDHCA) programs. Batt insulation is recommended in most cases, and must have the vapor barrier installed facing up and against the floor or conditioned area. Insulation should be attached or secured so that it can reasonably be expected to remain in place for at least 10 years.

Typical floor construction depth of manufactured homes usually does not allow R-19 batt to be installed within the floor joists so R-15 loose-fill insulation is recommended by TDHCA.

A minimum of 24-inch clearance from bottom of the insulation to the ground is required by Occupational Safety and Health Association (OSHA).

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Calibrated simulation modeling was used to develop these deemed savings values.

Savings values for the deemed savings estimates for this measure were developed using demand and energy savings calculated using BEopt 2.6, running Energy Plus 8.1 as the underlying simulation engine. To model this measure, the prototype home models for each climate zone were modified as follows: slab foundation was replaced with a crawlspace. A 5/8" thick wood floor is also specified.

The model runs calculated energy use for the prototypical home prior to the installation of the floor insulation measure. Next, change-case models were run to calculate energy use with the floor insulation measure in place.

Table 2-267: Residential Floor Insulation—Modifications to the Prototype Home Characteristics

Shell Characteristic	Value	Source
Foundation	Crawlspace	Skirting around perimeter is assumed uninsulated and vented. Ground under home is assumed to be bare, without any type of moisture barrier.
Base Floor Insulation	R-3.1	BEopt default for floor assembly, assuming 5/8" thick hardwood floor without carpet or other type of covering.
Change Floor Insulation	R-19 (except for manufactured housing, R-15)	Efficiency measure - retrofit insulation level as required by DOE and Texas Department of Housing and Community Affairs programs in Texas. Due to the typical floor joists depths found in manufactured housing, TDHCA recommends an R-15 loose-fill insulation for manufactured housing and other non-site-built homes.

Deemed Energy Savings Tables

Table 2-268 through Table 2-272 present energy savings on a kWh per square foot of insulation installed basis for all five Texas climate zones. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-268 through Table 2-271 by a factor of 0.6.

Table 2-268: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.)

Home Type	Cooling Savings		Heating Savings	
	Refrigerated Air	Evaporative Cooling	Electric Resistance	Heat Pump
Site-Built Home	-0.13	-0.07	1.72	0.68
Manufactured Home	-0.11	-0.06	1.52	0.60

Table 2-269: Climate Zone 2: North Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.)

Home Type	Cooling Savings		Heating Savings	
	Refrigerated Air	Evaporative Cooling	Electric Resistance	Heat Pump
Site-Built Home	-0.12	-	0.96	0.38
Manufactured Home	-0.10	-	0.85	0.33

Table 2-270: Climate Zone 3: South Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.)

Home Type	Cooling Savings		Heating Savings	
	Refrigerated Air	Evaporative Cooling	Electric Resistance	Heat Pump
Site-Built Home	-0.12	-	0.63	0.24
Manufactured Home	-0.10	-	0.56	0.21

Table 2-271: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.)

Home Type	Cooling Savings		Heating Savings	
	Refrigerated Air	Evaporative Cooling	Electric Resistance	Heat Pump
Site-Built Home	-0.07	-	0.40	0.15
Manufactured Home	-0.06	-	0.35	0.13

Table 2-272: Climate Zone 5: West Region—Residential Floor Insulation Deemed Annual Energy Savings (kWh/sq. ft.)

Home Type	Cooling Savings		Heating Savings	
	Refrigerated Air	Evaporative Cooling	Electric Resistance	Heat Pump
Site-Built Home	-0.16	-0.07	1.10	0.43
Manufactured Home	-0.13	-0.06	0.97	0.38

Deemed Summer Demand Savings Tables

Table 2-273 through Table 2-277 present the deemed summer demand savings (kW) for all five Texas climate zones.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying the appropriate cooling value in Table 2-273 through Table 2-277 by a factor of 0.6.

Table 2-273: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)

Home Type	Refrigerated Air	Evaporative Cooling
Site-Built Home	6.17E-06	-1.52E-05
Manufactured Home	5.48E-06	-1.30E-05

Table 2-274: Climate Zone 2: North Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)

Home Type	Refrigerated Air	Evaporative Cooling
Site-Built Home	3.10E-05	-
Manufactured Home	2.75E-05	-

Table 2-275: Climate Zone 3: South Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)

Home Type	Refrigerated Air	Evaporative Cooling
Site-Built Home	3.36E-05	-
Manufactured Home	2.77E-05	-

Table 2-276: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)

Home Type	Refrigerated Air	Evaporative Cooling
Site-Built Home	3.58E-05	-
Manufactured Home	3.07E-05	-

Table 2-277: Climate Zone 5: West Region—Residential Floor Insulation Deemed Summer Demand Savings (kW/sq. ft.)

Home Type	Refrigerated Air	Evaporative Cooling
Site-Built Home	6.29E-06	-1.34E-06
Manufactured Home	8.30E-07	1.85E-07

Deemed Winter Demand Savings Tables

Table 2-278 through Table 2-282 present the deemed winter demand savings for all five Texas climate zones. Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Table 2-278: Climate Zone 1: Panhandle Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.)

Home Type	Electric Resistance	Heat Pump
Site-Built Home	5.23E-04	2.55E-04
Manufactured Home	4.62E-04	2.25E-04

Table 2-279: Climate Zone 2: North Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.)

Home Type	Electric Resistance	Heat Pump
Site-Built Home	5.19E-04	2.88E-04
Manufactured Home	4.56E-04	2.50E-04

Table 2-280: Climate Zone 3: South Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.)

Home Type	Electric Resistance	Heat Pump
Site-Built Home	4.22E-04	2.03E-04
Manufactured Home	3.64E-04	1.74E-04

Table 2-281: Climate Zone 4: Valley Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.)

Home Type	Electric Resistance	Heat Pump
Site-Built Home	3.51E-04	1.53E-04
Manufactured Home	3.02E-04	1.31E-04

Table 2-282: Climate Zone 5: West Region—Residential Floor Insulation Deemed Winter Demand Savings (kW/sq. ft.)

Home Type	Electric Resistance	Heat Pump
Site-Built Home	3.54E-04	1.44E-04
Manufactured Home	3.19E-04	1.30E-04

Examples

Example 1. A manufactured home in Climate Zone 5 with evaporative cooling and an electric resistance furnace insulates 500 square feet.

$$kWh\ savings = (-0.06 + 0.97) \times 500 = 457.0\ kWh$$

$$Summer\ kW\ savings = 1.85 \times 10^{-7} \times 500 = 0.00\ kW$$

$$Winter\ kW\ savings = 3.19 \times 10^{-4} \times 500 = 0.16\ kW$$

Example 2. A site-built home in Climate Zone 2 with an air-source heat pump insulates 825 square feet.

$$kWh\ savings = (-0.12 + 0.38) \times 825 = 212.0\ kWh$$

$$Summer\ kW\ savings = 3.10 \times 10^{-5} \times 825 = 0.03\ kW$$

$$Winter\ kW\ savings = 2.88 \times 10^{-4} \times 825 = 0.24\ kW$$

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007), the Estimated Useful Life is 25 years for floor insulation.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are: The climate zone

- Climate zone
- Space heating system type (gas, electric, heat pump)

- Space cooling system type (evaporative cooling or electric air conditioning)
- Home type (site built or manufactured)
- Square footage of installed insulation.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 41070. Petition of El Paso Electric Company to Approve Revisions to Residential and Commercial Deemed Savings Based on Climate Data Specific to El Paso, Texas. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-283: Floor Insulation Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Added detail on methodology and model characteristics.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Multiplier provided to adjust cooling side savings for homes with evaporative cooling due to lower energy usage and demand associated with evaporative coolers relative to refrigerated air. Climate Zone 2 savings values awarded for Climate Zone 5 homes with heat pumps.
v3.1	11/05/2015	TRM v3.1 update. Provided example savings calculations.
v4.0	10/10/2016	TRM v4.0 update. Updated energy and demand savings per new prototype energy simulation models. Added separate savings for homes with evaporative cooling. Disqualified homes with gas heating for adding floor insulation.
v5.0	10/2017	TRM v5.0 update. Added explicit reference to mini-split technology.

2.3.6 ENERGY STAR® Windows Measure Overview

TRM Measure ID: R-BE-EW

Market Sector: Residential

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Measure Category: Building Envelope

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling.

Measure Description

ENERGY STAR® windows savings are calculated on per square foot of window basis, inclusive of frame and sash.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. Homes must be centrally heated with either a furnace (gas or electric resistance) or a heat pump to claim heating savings. Customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs are eligible to claim heating savings for homes heated with gas or electric resistance space heaters. Customers participating in HTR **or** LI programs are also eligible to claim reduced cooling savings for homes cooled by one or more **room** air conditioners by applying an adjustment to deemed savings that is specified for homes with refrigerated air.

Baseline

Two base cases are contemplated: single-pane and double-pane windows. In both cases a metal frame is specified. Estimated U-Values and SHGCs for baseline windows are presented in Table 2-284.

Table 2-284: Baseline Windows

Number of Panes	U-Factor Btu/(h·ft ² ·°F)	Solar Heat Gain Coefficient (SHGC)
1	1.16	0.76
2	0.76	0.67

High-Efficiency Condition

For a window to qualify for these deemed savings, it must meet the relevant ENERGY STAR[®] criteria for the location in the state where the window is to be installed. Table 2-285 lists the ENERGY STAR[®] specifications for windows as of January 1, 2015. These values are subject to updates in ENERGY STAR[®] specifications; energy efficiency service providers are expected to comply with the latest ENERGY STAR[®] code.

Table 2-285: ENERGY STAR[®] Windows Specifications effective January 2015

U.S. Region, ENERGY STAR [®]	U-Factor Btu/(h·ft ² ·°F)	Solar Heat Gain Coefficient (SHGC)
North-Central	≤ 0.30	≤ 0.40
South-Central	≤ 0.30	≤ 0.25
Southern	≤ 0.40	≤ 0.25

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Deemed savings values have been estimated using calibrated simulation models. Base case homes were fitted with single-pane and double-pane windows: change case homes were equipped with windows meeting the appropriate ENERGY STAR window specification for the location in which the window was to be installed. The Climate Zones in the Energy Star Windows specification were mapped to the Texas TRM Climate Zones as shown in Table 2-286:

Table 2-286. TRM Climate Zones and ENERGY STAR[®] Windows Climate Zones

Texas TRM Climate Zones	U.S. Region, ENERGY STAR [®] Windows
Climate Zone 1: Panhandle	North-Central
Climate Zone 2: North	South-Central
Climate Zone 3: South	Southern
Climate Zone 4: Valley	Southern
Climate Zone 5: West	South-Central

Deemed Energy Savings Tables

Table 2-287 and Table 2-288 present the energy savings (kWh) for the five Texas climate zones. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying appropriate cooling values in Table 2-287 and Table 2-288 by a factor of 0.6.

Table 2-287: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Annual Energy Savings (kWh/sq. ft.)

Climate Zone	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	2.83	0.98	0.29	6.70	3.16
Climate Zone 2: North	5.42	-	0.10	3.09	1.45
Climate Zone 3: South	5.32	-	0.02	0.77	0.41
Climate Zone 4: Valley	5.97	-	0.02	0.82	0.34
Climate Zone 5: West	5.67	1.90	0.00	0.99	0.69

Table 2-288: ENERGY STAR® Windows Replacing Double-Pane Windows Deemed Annual Energy Savings (kWh/sq. ft.)

Climate Zone	Cooling Savings		Heating Savings		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	2.03	0.72	0.18	4.15	2.00
Climate Zone 2: North	4.11	-	0.04	1.47	0.76
Climate Zone 3: South	3.96	-	-0.01	-0.21	0.01
Climate Zone 4: Valley	4.45	-	0.00	-0.01	0.02
Climate Zone 5: West	4.24	1.46	-0.03	-0.18	0.16

Deemed Summer Demand Savings Tables

Table 2-289 and Table 2-290 presents the summer demand savings (kW) for the five Texas climate zones.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying appropriate cooling values in Table 2-289 and Table 2-290 by a factor of 0.6.

Table 2-289: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Summer Demand Savings (kW/sq. ft.)

Climate Zone	Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	3.09E-03	1.16E-03
Climate Zone 2: North	3.89E-03	-
Climate Zone 3: South	3.51E-03	-
Climate Zone 4: Valley	2.99E-03	-
Climate Zone 5: West	3.86E-03	1.05E-03

Table 2-290: ENERGY STAR® Windows Replacing Double-Pane Windows, Deemed Summer Demand Savings (kW/sq. ft.)

Climate Zone	Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	2.08E-03	8.36E-04
Climate Zone 2: North	2.80E-03	-
Climate Zone 3: South	2.40E-03	-
Climate Zone 4: Valley	2.15E-03	-
Climate Zone 5: West	2.76E-03	8.09E-04

Deemed Winter Demand Savings Tables

Table 2-291 and Table 2-292 presents the winter demand savings (kW) for the five Texas climate zones.

Table 2-291: ENERGY STAR® Windows Replacing Single-Pane Windows, Deemed Winter Demand Savings by Heat Type (kW/sq. ft.)

Climate Zone	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	2.01E-04	4.98E-03	2.43E-03
Climate Zone 2: North	1.77E-04	4.73E-03	2.74E-03
Climate Zone 3: South	6.89E-05	1.78E-03	3.11E-04
Climate Zone 4: Valley	4.78E-05	1.65E-03	6.68E-04
Climate Zone 5: West	2.83E-05	1.10E-03	5.00E-04

Table 2-292: ENERGY STAR® Windows Replacing Double-Pane Windows, Deemed Winter Demand Savings by Heat Type (kW/sq. ft.)

Climate Zone	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	1.32E-04	3.30E-03	1.64E-03
Climate Zone 2: North	1.12E-04	3.16E-03	1.89E-03
Climate Zone 3: South	2.33E-05	6.68E-04	3.58E-06
Climate Zone 4: Valley	1.53E-05	5.62E-04	2.34E-04
Climate Zone 5: West	1.31E-05	5.84E-04	2.76E-04

Examples

Example 1. A home in Climate Zone 1 with evaporative cooling and an electric resistance furnace replaces 125 square feet of single-pane windows with ENERGY STAR® windows.

$$kWh\ savings = (0.98 + 6.70) \times 125 = 960\ kWh$$

$$Summer\ kW\ savings = 1.16 \times 10^{-3} \times 125 = 0.15\ kW$$

$$Winter\ kW\ savings = 4.98 \times 10^{-3} \times 125 = 0.62\ kW$$

Example 2. A home in Climate Zone 5 with a central air conditioning unit and a gas furnace replaces 250 square feet of double-pane windows with ENERGY STAR® windows.

$$kWh\ savings = (4.24 + (-0.03)) \times 250 = 1,052.5\ kWh$$

$$Summer\ kW\ savings = 2.76 \times 10^{-3} \times 250 = 0.69\ kW$$

$$Winter\ kW\ savings = 1.31 \times 10^{-5} \times 250 = 0.00\ kW$$

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

According to the GDS Associates Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures (2007), the Estimated Useful Life is 25 years for ENERGY STAR® windows.

Program Tracking Data and Evaluation Requirements

It is required that the following list of primary inputs and contextual data be specified and tracked by the program database to inform the evaluation and apply the savings properly:

- Climate zone
 - Space heating system type (non-electric, electric resistance, heat pump)
 - Space cooling system type (evaporative cooling or electric air conditioning)
 - Area of ENERGY STAR® windows installed

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 48. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 27903. Order Adopting New §25.184 as Approved at the August 21, 2003 Open Meeting and Submitted to the Secretary of State. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-293: ENERGY STAR® Windows Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Multiplier provided to adjust cooling side savings for homes with evaporative cooling due to lower energy usage and demand associated with evaporative coolers relative to refrigerated air. Climate Zone 2 savings values awarded for Climate Zone 5 homes.
v3.1	11/05/2015	TRM v3.1 update. Provided example savings calculations. Consolidated table formats.
v4.0	10/10/2016	TRM v4.0 update. Updated energy and demand savings per new prototype energy simulation models. Added separate savings for homes with evaporative cooling.
v5.0	10/2017	TRM v5.0 update. Added explicit reference to mini-split technology

2.3.7 Solar Screens Measure Overview

TRM Measure ID: R-BE-SC

Market Sector: Residential

Measure Category: Building Envelope

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Building Simulation Modeling.

Measure Description

Savings are presented for the installation of solar screens on west and/or south-facing windows or glass doors. Deemed savings are calculated per square foot of treated window or door opening.

Eligibility Criteria

Cooling savings in this measure apply to customers with central or mini-split electric refrigerated air conditioning in their homes, or to customers in TRM Climate Zones 1 and 5 who have evaporative cooling systems. The heating savings penalty applies to homes that are centrally heated with either a furnace (gas or electric resistance) or a heat pump.

Solar screens must be installed on windows or glass doors that face west or south and receive significant direct sun exposure. Solar screens must block at least 65 percent of the solar heat gain to qualify for deemed savings.

Baseline Condition

The baseline is a single pane, clear glass, unshaded, west-, or south-facing window with a solar heat gain coefficient of 0.68. Baseline window area is assumed to be 7.5 percent of the total wall area.

High-Efficiency Condition

Solar screen material installed on south or west-facing windows must reduce solar heat gain by at least 65 percent. Solar screens are not recommended for homes with electric resistance heat.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Deemed savings values have been estimated using calibrated simulation models. Specifically, these deemed savings estimates were developed using BEopt 2.6, running EnergyPlus 8.4 as the underlying simulation engine. A single modification was made to the prototype models for the various climate zone-HVAC type combinations to create the base case models for estimating savings for the solar screens measure. Windows facing all directions are assumed to be single-pane windows with U-Values of 1.16 BTU/h-ft²-R and Solar Heat Gain Coefficients (SHGC) of 0.76.

For the change case models, an 80 percent reduction was applied to the solar heat gain coefficient for the south and west-facing windows.

Summer and winter peak demand savings are estimated by taking the difference in demand for the 20 hours identified from the TMY3 datasets in which the summer and winter peaks are most likely to occur as described in section 4 - Peak Demand Definitions, of TRM Volume 1.

The model assumes the average solar screen installed blocks 80 percent of the solar heat gain attributed to the south and west facing windows based on performance data from solar screens analyzed at sun angles of 30, 45 and 75 degrees to the window.¹⁸⁹

While it is recommended that solar screens be removed during winter to allow the advantage of free heat from the sun, often they are not removed seasonally. This may be due to solar screens serving as an insect screen in addition to blocking the sun or simply that they're installed in difficult-to-reach areas such as second floor windows. The savings estimates presented herein assume that the installed solar screens remain in place year-round.

Thermal Performance Improvement

Manual J and other studies researched indicate a thermal improvement to a window with a solar screen due to reduced air infiltration. The National Certified Testing Laboratories provided a report stating a 15 percent reduction in the thermal transmittance of a single pane, 1/4" clear glass window with a solar screen added to the exterior.

Another study that was conducted for NFRC indicated between a 22 percent and 4 percent improvement to the U-value of a window with a solar screen. A single pane, clear window has a 22 percent improvement with the addition of a solar screen, whereas a double pane, spectrally selective low-E window may only have a 4 percent improvement. The deemed savings models assume an average 10 percent improvement in thermal performance with the addition of a solar screen.

¹⁸⁹ Performance data from Matrix, Inc., Mesa, Arizona testing facility for Phifer Wire Products' SunTex screen, blocks 80 percent of solar heat gain.

Window Frame

The window frame accounts for 10-30 percent¹⁹⁰ of the window area and since it is opaque and blocks sunlight from entering the home, it is factored into the model. An average of 15 percent frame area was incorporated into the performance of the window.

Example Calculation

Example 1. A home in Climate Zone 4 with a central air conditioning unit and an electric resistance furnace installs 75 square feet of solar screens.

$$kWh \text{ savings} = (6.09 + (-3.21)) \times 75 = 216 kWh$$

$$\text{Summer kW savings} = 3.17 \times 10^{-3} \times 75 = 0.24 kW$$

$$\text{Winter kW savings} = -2.32 \times 10^{-3} \times 75 = -0.17 kW$$

Deemed Energy Savings Tables

Table 2-294 presents the deemed energy savings value per square foot of solar screen installed. Annual energy savings are the sum of cooling and heating savings for the appropriate equipment types.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying appropriate cooling value in Table 2-294 by a factor of 0.6.

Table 2-294: Deemed Energy (kWh) Savings per Square Foot of Solar Screen

Climate Zone	Cooling Savings (kWh/sq. ft.)		Heating Savings (kWh/sq. ft.)		
	Refrigerated Air	Evaporative Cooling	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	3.67	1.34	-0.62	-12.81	-4.54
Climate Zone 2: North	5.38	-	-0.29	-7.14	-2.56
Climate Zone 3: South	5.33	-	-0.16	-4.69	-1.69
Climate Zone 4: Valley	6.09	-	-0.09	-3.21	-1.16
Climate Zone 5: West	5.62	1.99	-0.44	-10.48	-3.81

¹⁹⁰ Residential Windows – A Guide to New Technologies and Energy Performance, 2000.

Deemed Summer Demand Savings Tables

Table 2-295 presents the deemed summer peak demand savings value per square foot of solar screen installed.

For customers who participate in Hard-to-Reach (HTR) or Low Income (LI) programs, cooling savings may be claimed for homes cooled by one or more room air conditioners by multiplying appropriate cooling value in Table 2-295 by a factor of 0.6.

Table 2-295: Deemed Summer Peak Demand (kW) Savings per Square Foot of Solar Screen

Climate Zone	Refrigerated Air	Evaporative Cooling
Climate Zone 1: Panhandle	2.89E-03	1.35E-03
Climate Zone 2: North	3.42E-03	-
Climate Zone 3: South	3.29E-03	-
Climate Zone 4: Valley	3.17E-03	-
Climate Zone 5: West	3.12E-03	1.07E-03

Deemed Winter Demand Savings Tables

Table 2-296 presents the deemed winter peak demand savings value per square foot of solar screen installed. Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Table 2-296: Deemed Winter Peak Demand (kW) Savings per Square Foot of Solar Screen

Climate Zone	Gas Heat	Electric Resistance	Heat Pump
Climate Zone 1: Panhandle	-1.16E-04	-1.73E-03	-9.45E-04
Climate Zone 2: North	-5.20E-05	-1.32E-03	-7.96E-04
Climate Zone 3: South	-1.07E-04	-2.65E-03	-1.71E-03
Climate Zone 4: Valley	-7.68E-05	-2.32E-03	-1.08E-03
Climate Zone 5: West	-1.45E-04	-3.34E-03	-1.30E-03

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of solar screens is established at 10 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).¹⁹¹

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Space cooling system type (evaporative cooling, refrigerated air conditioning)
- Space heating system type (gas, electric, heat pump)
- Square footage of windows or door openings treated.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 41070. Petition of El Paso Electric Company to Approve Revisions to Residential and Commercial Deemed Savings Based on Climate Data Specific to El Paso, Texas. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

¹⁹¹ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

Document Revision History

Table 2-297: Solar Screens Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Added detail on methodology and model characteristics. Savings awarded for south-facing windows, in addition to east- and west-facing windows.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. Multiplier provided to adjust cooling side savings for homes with evaporative cooling due to lower energy usage and demand associated with evaporative coolers relative to refrigerated air. Climate Zone 2 savings values awarded for Climate Zone 5 homes with heat pumps.
v3.1	11/05/2015	TRM v3.1 update. Provided example savings calculations.
v4.0	10/10/2016	TRM v4.0 update. Updated energy and demand savings per new prototype energy simulation models. Added separate savings for homes with evaporative cooling.
v5.0	10/2017	TRM v5.0 update. Added explicit reference to mini-split technology. Added provision for Low Income and Hard-to-Reach customers cooled by room air conditioners to claim savings.

2.4 RESIDENTIAL: WATER HEATING

2.4.1 Faucet Aerators Measure Overview

TRM Measure ID: R-WH-FA

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure involves installing aerators on kitchen and bathroom water faucets as a retrofit measure.

Eligibility Criteria

The savings values are per faucet aerator installed. It is not a requirement that all faucets in a home be treated for the deemed savings to be applicable.

These deemed savings are for residential, retrofit-only installation of kitchen and bathroom faucet aerators. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity.

Table 2-298: Faucet Aerators—Applicability

Application Type	Applicable
Retrofit	Y
New Construction	N

Baseline Condition

The 2.2 gallon per minute (GPM) baseline faucet flow rate is based on the Energy Policy Act of 1992 (EPA Act 92). The deemed savings assume that the existing faucet aerators have a minimum flow rate of 2.2 GPM. The US EPA WaterSense specification for faucet aerators is 1.5 GPM.¹⁹²

Table 2-299: Faucet Aerators—Baseline and Efficiency Standard

Baseline	Efficiency Standard
2.2 GPM minimum	1.5 GPM maximum

High-Efficiency Condition

Aerators that have been defaced so as to make the flow rating illegible are not eligible for replacement. For direct install programs, all aerators removed shall be collected by the contractor and held for possible inspection by the utility until all inspections for invoiced installations have been completed.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

The deemed savings, for any faucet aerator change case using aerators with flow rates of 1.5 GPM or lower, are calculated as follows:

$$\text{Energy Savings (per aerator)} = \frac{\rho \times C_p \times (GPM_{Base} - GPM_{Low}) \times N \times t \times 365 \times (T_{FaucetAvg} - T_{SupplyAvg})}{FPH \times RE \times Conversion\ Factor}$$

Equation 80

Where:

ρ	=	Water density, 8.33 lbs/gallon
C_p	=	Specific heat of water, 1 Btu/lb°F
GPM_{Base}	=	Average baseline flow rate of aerator = 2.2 gallons per minute
GPM_{Low}	=	Post-installation flow rate of aerator, typically 1.5, 1.0, or 0.5 gallons per minute; if unknown, assume 1.5 gallons per minute
N	=	Average number of persons per household = 2.82 persons ¹⁹³

¹⁹² http://www.epa.gov/watersense/partners/faucets_final.html.

¹⁹³ Occupants per home for Texas from US Census Bureau, "Persons per household, 2009-2013". Accessed December 2015. <http://quickfacts.census.gov/qfd/states/48000.html>.

t	=	Average time in minutes of hot water usage per person per day; default = 2.34 min/person/day ¹⁹⁴
$T_{SetPoint}$	=	Average faucet temperature = 88°F ¹⁹⁵
$T_{SupplyAverage}$	=	Average supply water temperature (see Table 2-300)
FPH	=	Average number of faucets per household = 3.93 faucets ¹⁹⁶
RE	=	Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters or 2.2 for heat pump water heaters. ¹⁹⁷
ConversionFactor	=	3,412 Btu/kWh

Demand Savings Algorithms

Demand savings will be calculated using the following formula:

$$\begin{aligned}
 & \text{Demand Savings (per aerator)} \\
 &= \frac{\rho \times C_p \times (GPM_{Base} - GPM_{Low}) \times N \times t \times 365 \times (T_{FaucetAvg} - T_{SupplySeasonal})}{FPH \times RE \times \text{Conversion Factor}} \\
 & \times \text{Ratio}_{\text{annual kWh}}^{\text{Peak seasonal kW}}
 \end{aligned}$$

Equation 81

Where:

$T_{SupplySeasonal}$	=	Seasonal supply water temperature (Table 2-300)
$\text{Ratio}_{\text{annual kWh}}^{\text{Peak seasonal kW}}$	=	Ratio of peak seasonal kW to annual kWh savings (Table 2-301)

¹⁹⁴ Cadmus and Opinion Dynamics Evaluation Team, "Memorandum: Showerhead and Faucet Aerator Meter Study". Prepared for Michigan Evaluation Working Group. Derived by taking weighted average of average minutes per person per day specified for kitchens (4.5) and bathrooms (1.6) assuming 1 kitchen aerator and 2.93 bathrooms.

¹⁹⁵ Cadmus and Opinion Dynamics Evaluation Team, "Memorandum: Showerhead and Faucet Aerator Meter Study". Prepared for Michigan Evaluation Working Group. Derived by taking weighted average of average temperature for kitchens (93 °F) and bathrooms (86 °F) assuming 1 kitchen aerator and 2.93 bathrooms.

Data collection discussed in Appendix D of the EM&V team's Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

¹⁹⁶ Faucets per home assumed to be equal to one (kitchen) plus number of half bathrooms and full bathrooms per home as specified in the 2009 Residential Energy Consumption Survey (RECS), Table HC2.10.

¹⁹⁷ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at <http://www.ahrinet.org>.

Table 2-300: Water Mains Temperature

Climate Zone	Water Mains Temperature °F*		
	T _{SupplyAverage}	T _{SupplySeasonal}	
		Summer	Winter
Climate Zone 1: Panhandle	62.9	73.8	53.7
Climate Zone 2: North	71.8	84.0	60.6
Climate Zone 3: South	74.7	84.5	65.5
Climate Zone 4: Valley	77.2	86.1	68.5
Climate Zone 5: West	70.4	81.5	60.4

* Based on typical meteorological year (TMY) dataset for TMY3:
http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/.

Table 2-301: Water Fixture Peak Demand Ratios

Peak Demand Ratios*	
Summer	Winter
0.000110	0.000274

* US Department of Energy's "Building America Performance Analysis Procedures for Existing Homes" combined domestic hot water use profile (<http://www.nrel.gov/docs/fy06osti/38238.pdf>).

The fixture peak demand ratios were derived by taking the fraction hot water use during the peak hour (summer: 4-5PM, winter: 7-8AM) to the total daily usage from the Building America Performance Analysis Procedures for Existing Homes, and dividing it by the number of days per year (365). The fraction of hot water use during the winter peak hour to total daily water usage is 0.1: $0.1/365=0.000274$. The summer peak hour to total daily water usage is 0.04: $0.04/365=0.000110$.

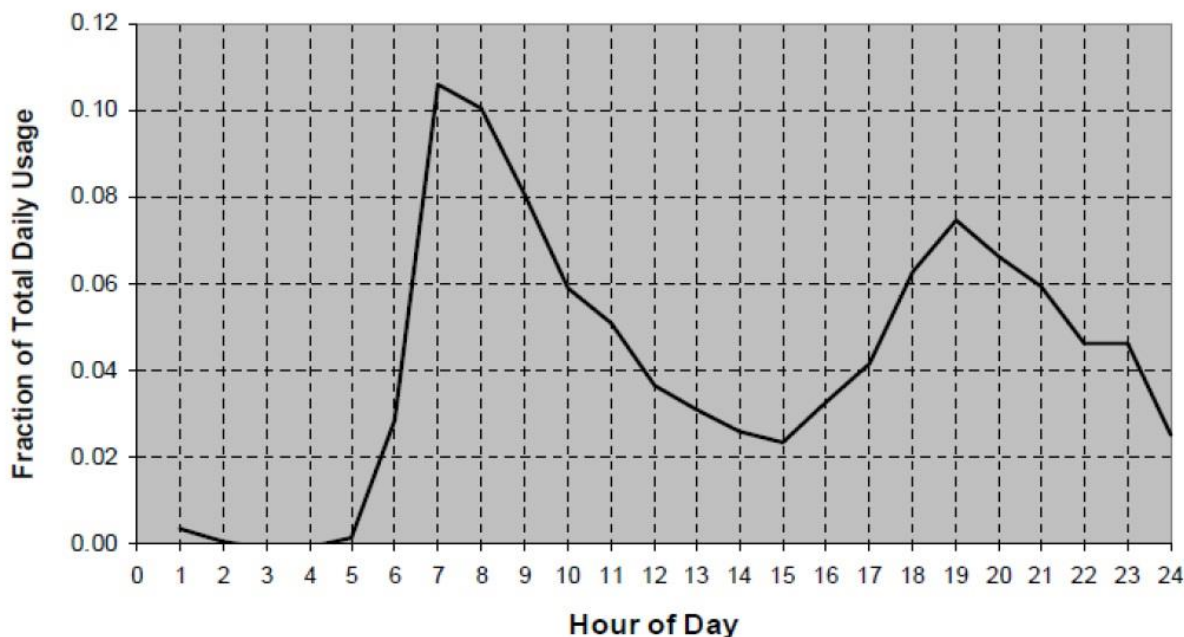


Figure 2-6: Shower, Bath, and Sink Hot Water Use Profile

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a faucet aerator is established at ten years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).¹⁹⁸

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Recovery Efficiency (RE) or COP, if available
- Flow rate in gallons per minute (GPM) of faucet installed
- Water heater type (e.g., heat pump, electric resistance).

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

¹⁹⁸ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

Document Revision History

Table 2-302: Faucet Aerators Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	10/30/2015	TRM v3.1 update. Supplemented reference for water heater set point temperature.
v4.0	10/10/2016	TRM v4.0 update. Updated methodology to calculate energy and demand savings.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.2 Low-Flow Showerheads Measure Overview

TRM Measure ID: R-WH-SH

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure consists of removing existing showerheads and installing low-flow showerheads in residences.

Eligibility Criteria

The incentive is for replacement of an existing showerhead with a new showerhead rated at 2.0, 1.7, or 1.5 gallons per minute (GPM). The only showerheads eligible for installation are those that are not easily modified to increase the flow rate.

These deemed savings are for showerheads installed as a retrofit measure in existing homes. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity.

Table 2-303: Low-Flow Showerheads—Applicability

Application Type	Applicable
Retrofit	Y
New Construction	N

Baseline Condition

Federal standards set a maximum flow rate of 2.5 GPM,¹⁹⁹ while the US Environmental Protection Agency (EPA) WaterSense Program has implemented efficiency standards for showerheads requiring a maximum flow rate of 2.0 GPM.²⁰⁰

Table 2-304: Low-Flow Showerhead—Baseline and Efficiency Standards

Existing Showerhead Baseline Flow Rate	New Showerhead Flow Rate*
2.5 GPM maximum	1.5 GPM, 1.75 GPM or 2.0 GPM maximum

* All flow rate requirements listed here are the rated flow of the showerhead measured at 80 pounds per square inch of pressure (psi).

High-Efficiency Condition

In addition to the meeting the baseline requirements above, existing showerheads that have been defaced so as to make the flow rating illegible are not eligible for replacement. All showerheads removed shall be collected by the contractor and held for possible inspection by the utility until all inspections for invoiced installations have been completed.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Energy savings for this measure are calculated as follows:

$$\text{Energy Savings (per showerhead)} = \frac{\rho \times C_p \times (GPM_{Base} - GPM_{Low}) \times N \times t \times 365 \times (T_{ShowerAvg} - T_{SupplyAvg})}{SPH \times RE \times Conversion\ Factor}$$

Equation 82

Where:

ρ	=	Water density, 8.33 lbs/gallon
C_p	=	Specific heat of water, 1 Btu/lb°F
GPM_{Base}	=	Average baseline flow rate of aerator = 2.5 gallons per minute
GPM_{Low}	=	Post-installation flow rate of aerator, typically 2.0, 1.75, or 1.5 gallons per minute; if unknown, assume 2.0 gallons per minute

¹⁹⁹ http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/37

²⁰⁰ <http://www.epa.gov/watersense/products/showerheads.html>

N	=	Average number of persons per household = 2.82 persons ²⁰¹
t	=	Average time in minutes of hot water usage per person per day; default = 7.8 min/person/day ²⁰²
T _{SetPoint}	=	Average shower temperature = 101°F ²⁰³
T _{Supply}	=	Average supply water temperature (see Table 2-305)
SPH	=	Average number of showerheads per household = 1.68 showerheads ²⁰⁴
RE	=	Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters or 2.2 for heat pump water heaters. ²⁰⁵

ConversionFactor = 3,412 Btu/kWh

Demand Savings Algorithms

Demand savings will be calculated using the following formula:

$$\begin{aligned}
 & \text{Demand Savings (per showerhead)} \\
 &= \frac{\rho \times C_p \times (GPM_{Base} - GPM_{Low}) \times N \times t \times 365 \times (T_{ShowerAvg} - T_{SupplySeasonal})}{SPH \times RE \times Conversion Factor} \\
 & \times Ratio_{\frac{Peak_{seasonal} kW}{annual kWh}}
 \end{aligned}$$

Equation 83

Where:

T _{SupplySeasonal}	=	Seasonal supply water temperature (see Table 2-305)
Ratio _{$\frac{Peak_{seasonal} kW}{annual kWh}$}	=	Ratio of peak seasonal kW to annual kWh savings (see Table 2-306)

²⁰¹ Occupants per home for Texas from US Census Bureau, "Persons per household, 2009-2013". Accessed December 2015. <http://quickfacts.census.gov/qfd/states/48000.html>.

²⁰² Cadmus and Opinion Dynamics Evaluation Team, "Memorandum: Showerhead and Faucet Aerator Meter Study". Prepared for Michigan Evaluation Working Group.

²⁰³ Data collection discussed in Appendix D of the EM&V team's Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

²⁰⁴ Showerheads per home assumed to be equal to the number of full bathrooms per home as specified in the 2009 Residential Energy Consumption Survey (RECS), Table HC2.10.

²⁰⁵ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at http://cafs.ahrinet.org/gama_cafs/sdpsearch/search.jsp?table=CWH.

Table 2-305: Water Mains Temperature

Climate Zone	Water Mains Temperature (°F) *		
	T _{SupplyAverage}	T _{SupplySeasonal}	
		Summer	Winter
Climate Zone 1: Panhandle	62.9	73.8	53.7
Climate Zone 2: North	71.8	84.0	60.6
Climate Zone 3: South	74.7	84.5	65.5
Climate Zone 4: Valley	77.2	86.1	68.5
Climate Zone 5: West	70.4	81.5	60.4

* Based on typical meteorological year (TMY) dataset for TMY3:
http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/.

Table 2-306: Water Fixture Peak Demand Ratios

Peak Demand Ratios*	
Summer	Winter
0.000110	0.000274

* US Department of Energy's "Building America Performance Analysis Procedures for Existing Homes" combined domestic hot water use profile (<http://www.nrel.gov/docs/fy06osti/38238.pdf>).

The fixture peak demand ratios were derived by taking the fraction hot water use during the peak hour (summer: 4-5pm, winter: 7-8am) to the total daily usage from the Building America Performance Analysis Procedures for Existing Homes, and dividing it by the number of days per year (365). The fraction of hot water use during the winter peak hour to total daily water usage is 0.1: $0.1/365=0.000274$. The summer peak hour to total daily water usage is 0.04: $0.04/365=0.000110$.

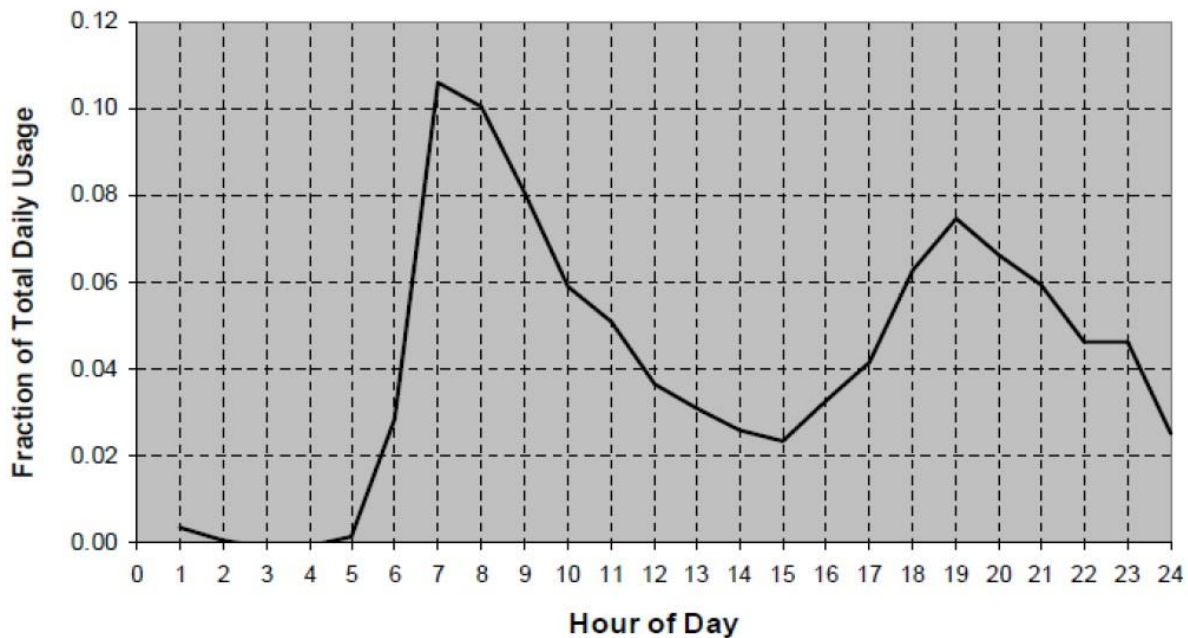


Figure 2-7: Shower, Bath, and Sink Hot Water Use Profile

Source: Building America Performance Analysis Procedures for Existing Homes

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a low-flow showerhead is established at 10 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).²⁰⁶

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Recovery Efficiency (RE) or COP, if available
- Flow rate in gallons per minute (GPM) of showerhead installed
- Water heater type (e.g., heat pump, electric resistance)

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

²⁰⁶ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

Document Revision History

Table 2-307: Low-Flow Showerheads Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. Provided clarification that savings are to be awarded per showerhead. Supplemented reference for water heater set point temperature.
v4.0	10/10/2016	TRM v4.0 update. Updated methodology to calculate energy and demand savings.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.3 Water Heater Pipe Insulation Measure Overview

TRM Measure ID: R-WH-PI

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure requires the installation of pipe insulation on un-insulated water heater pipes that are served by an electric water heater.

Eligibility Criteria

Water heaters plumbed with heat traps are not eligible to receive incentives for this measure. It is recommended that the installer (or contractor) checks to see if the water heater heat trap works properly before declaring the water heater ineligible.

Water heater pipe insulation is a residential retrofit measure. New construction and retrofits involving the installation of new water heaters are not eligible for this measure, because they must meet current code requirements. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity.

Table 2-308: Water Heater Pipe Insulation—Applicability

Application Type	Applicable	Notes
Retrofit	Y	Savings cannot be claimed in conjunction with the installation of a new water heater.
New Construction	N	

Baseline Condition

The baseline is assumed to be a typical electric water heater with no heat traps and no insulation on water heater pipes.

Table 2-309: Water Heater Pipe Insulation—Baseline Standard

Baseline
Un-insulated hot water pipes

High-Efficiency Condition

The efficiency standard requires an insulation thickness R-3. The International Residential Code (IRC) 2009 section N1103.3: Mechanical system piping insulation requires R-3 insulation.

Table 2-310: Water Heater Pipe Insulation—Efficiency Standard

Efficiency Standard
Minimum insulation of R-3

All visible hot water piping must be insulated. Savings are based on a maximum allowable insulation length of 6 feet of piping.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Hot water pipe insulation energy savings are calculated using the following formula:

$$\text{Energy savings per year} = (U_{pre} - U_{post}) \times A \times (T_{pipe} - T_{ambient\ annual}) \times \left(\frac{1}{RE}\right) \times \frac{Hours_{Total}}{\text{conversion factor}}$$

Equation 84

Where:

$$U_{pre}^{207} = \frac{1}{2.03} = 0.49 \text{ Btu/hr} \cdot \text{sq. ft.} \cdot ^\circ\text{F}$$

$$U_{post} = \frac{1}{2.03 + R_{Insulation}}$$

$$R_{Insulation} = \text{R-value of installed insulation}$$

$$A = \text{Pipe surface area insulated in square feet } (\pi DL) \text{ with } L \text{ (length) and } D \text{ (pipe diameter) in feet. The maximum length allowable for insulation is 6 feet. If the pipe area is unknown, use the following table:}$$

²⁰⁷ 2.03 is the R-value representing the film coefficients between water and the inside of the pipe, and between the surface and air. Mark's Standard Handbook for Mechanical Engineers, 8th edition.

Table 2-311: Estimated Pipe Surface Area

Pipe Diameter (inches)	Pipe Surface Area (square feet) ²⁰⁸
0.5	0.16 x required input "Pipe Length insulated (feet)"
0.75	0.23 x required input "Pipe Length insulated (feet)"
1.0	0.29 x required input "Pipe Length insulated (feet)"

$$T_{\text{pipe}}(^{\circ}\text{F}) = 120^{\circ}\text{F}^{209}$$

$$T_{\text{ambientannual}}(^{\circ}\text{F}) = \text{Ambient annual temperature (see Table 2-312)}$$

$$\text{RE} = \text{Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters or 2.2 for heat pump water heaters.}^{210}$$

$$\text{Hours}_{\text{Total}} = 8,760 \text{ hr. per year}$$

$$\text{Conversion factor} = 3,412 \text{ Btu per kWh}$$

Demand Savings Algorithms

Pipe Insulation Demand Savings (kW)

$$= (U_{\text{pre}} - U_{\text{post}}) \times A \times (T_{\text{Pipe}} - T_{\text{ambient seasonal}}) \times \left(\frac{1}{\text{RE}}\right) \times \frac{1}{\text{conversion factor}}$$

Equation 85

Where:

$$T_{\text{ambientseasonal}}(^{\circ}\text{F}) = \text{Ambient seasonal temperature (see Table 2-312)}$$

²⁰⁸ Factors used in the calculation for pipe area were determined by using the outside diameter of the pipe in inches, converting it to feet, and multiplying by π as shown below.

Nominal Diameter (inches)	Outside Diameter (inches)	Factor to Calculate Pipe Area
0.5	0.625	0.16
0.75	0.875	0.23
1.0	1.125	0.29

²⁰⁹ 120°F represents the assumed water heater setpoint. New York Department of Public Service recommends using water heater setpoint as a default value, see "New York Standard Approach for Estimating Energy Savings from Energy Efficiency Programs" October 2010, page 102.

Data collection discussed in Appendix D of the EM&V team's Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

²¹⁰ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at <http://www.ahrinet.org>.

Table 2-312: Ambient Temperatures per Climate Zone

Climate Zone		Ambient Temperature (°F)					
		Water Heater Location: Unconditioned Space*			Water Heater Location: Conditioned Space**		
		Annual	Peak Seasonal		Annual	Peak Seasonal	
Summer	Winter		Summer	Winter			
1	Panhandle	65.5	106	32	72.7	75.1	69.3
2	North	73.1	108.1	42			
3	South	76.3	108.2	46			
4	Valley	78.4	103	55			
5	West	71.8	108	41.1			

* Average ambient temperatures were taken from TMY3 data, with a 7°F increase in winter and an 11°F increase in summer based on ASHRAE 152 Heating System and Cooling System Location Temperatures (Garage).

** Weighted average reported thermostat set points from RECS. Times associated with these set points are assumed to be the same as those assumed by ENERGY STAR®: http://www.energystar.gov/index.cfm?c=thermostats.pr_thermostats_guidelines.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of water heater pipe insulation installed for an electric water heater is established at 13 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).²¹¹

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- The R-value of the installed insulation
- Recovery Efficiency (RE) or COP, if available
- Pipe length insulated (feet)
- The pipe surface area insulated in square feet (at least the pipe diameter in inches)

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

²¹¹ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

Document Revision History

Table 2-313: Water Heater Pipe Insulation Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. Supplemented reference for water heater set point temperature.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.4 Water Heater Tank Insulation Measure Overview

TRM Measure ID: R-WH-WJ

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Retrofit

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure requires the installation of tank insulation on un-insulated water heater tanks that are served by an electric water heater.

Eligibility Criteria

Water heaters meeting the National Appliance Energy Conservation Act standards with respect to insulation and standby loss requirements are not eligible for this measure. To ensure compliance, the contractor shall inspect the build date listed on the existing water heater label and verify that the listed build date is before 1991.

Water heater pipe insulation is a residential retrofit measure. New construction and water heater replacements are not eligible for this measure, because they must meet current code requirements. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity.

Table 2-314: Water Heater Tank Insulation—Applicability

Application Type	Applicable
Retrofit	Y
New Construction	N

Baseline Condition

The baseline is assumed to be a typical electric water heater with no insulation.

High-Efficiency Condition

There is no minimum insulation requirement. Manufacturer's instructions on the water heater jacket and the water heater itself should be followed. Thermostat and heating element access panels must be left uncovered.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Hot water tank insulation energy savings are calculated using the following formula:

Energy savings per year

$$= (U_{pre} - U_{post}) \times A \times (T_{tank} - T_{ambient\ annual}) \times \left(\frac{1}{RE}\right) \times \frac{Hours_{Total}}{conversion\ factor}$$

Equation 86

Where:

$$U_{pre} = 1 / (5) \text{ Btu/hr sq.ft. } ^\circ F$$

$$U_{post} = 1 / (5 + R_{Insulation})$$

$$R_{Insulation} = R\text{-value of installed insulation}$$

$$A = \text{Tank surface area insulated in square feet } (\pi DL) \text{ with } L \text{ (length) and } D \text{ (tank diameter) in feet. If the tank area is not known, use Table 2-315.}$$

Table 2-315: Estimated Tank Area

Volume (gal)	A (sf.) *
30	17.45
40	21.81
50	22.63
60	26.94
80	30.36
120	38.73

* Tank area was obtained from a survey of electric water heater manufacturer data. Dimensions for each tank size were collected and averaged to determine a typical square footage of each size water heater. Accessed April 2013:

<http://www.hotwater.com/water-heaters/residential/conventional/electric/promax/standard/>.

Accessed April 2013:

<http://www.whirlpoolwaterheaters.com/products/electric-water-heaters/es40r92-45d/>.

- $T_{\text{tank}}(^{\circ}\text{F})$ = Average temperature of the tank, default use 120°F²¹²
- $T_{\text{ambientannual}}(^{\circ}\text{F})$ = Ambient annual temperature (see Table 2-316)
- RE = Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters or 2.2 for heat pump water heaters.²¹³
- Hours_{Total} = 8,760 hours per year
- Conversion factor = 3,412 Btu per kWh

Demand Savings Algorithms

Tank Insulation Demand Savings (kW)

$$= (U_{\text{pre}} - U_{\text{post}}) \times A \times (T_{\text{Tank}} - T_{\text{ambient seasonal}}) \times \frac{1}{RE} \times \frac{1}{\text{conversion factor}}$$

Equation 87

Where:

$T_{\text{ambientseasonal}}(^{\circ}\text{F})$ = Ambient seasonal temperature (see Table 2-316)

Table 2-316: Ambient Temperatures per Climate Zone

Climate Zone		Ambient Temperature (°F)					
		Water Heater Location: Unconditioned Space			Water Heater Location: Conditioned Space		
		Annual	Peak Seasonal		Annual	Peak Seasonal	
			Summer	Winter		Summer	Winter
1	Panhandle	65.5	106	32	72.7	75.1	69.3
2	North	73.1	108.1	42			
3	South	76.3	108.2	46			
4	Valley	78.4	103	55			
5	West	71.8	108	41.1			

* Average ambient temperatures were taken from TMY3 data, with a 7°F increase in winter and an 11°F increase in summer based on ASHRAE 152 Heating System and Cooling System Location Temperature (Garage).

** Weighted average reported thermostat set points from RECS. Times associated with these set points assumed to be the same as those assumed by ENERGY STAR®:

http://www.energystar.gov/index.cfm?c=thermostats.pr_thermostats_guidelines.

²¹² 120°F represents the assumed water heater setpoint. New York Department of Public Service recommends using water heater setpoint as a default value, see “New York Standard Approach for Estimating Energy Savings from Energy Efficiency Programs” October 2010, page 99.

Data collection discussed in Appendix D of the EM&V team’s Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

²¹³ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at <http://www.ahrinet.org>.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) for storage water heater tank insulation is established at 7 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).²¹⁴

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Recovery Efficiency (RE) or COP, if available
- The R-value of the installed insulation
- Tank surface area insulated in square feet (πDL) with L (length) and D (tank diameter) in feet; if unable to determine tank area, tank volume must be recorded.

²¹⁴ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

References and Efficiency Standards

Petitions and Rulings

- Docket No. 41722. Petition of AEP Texas Central Company, AEP Texas North Company, CenterPoint Energy Houston Electric, LLC, El Paso Electric Company, Entergy Texas, Inc., Oncor Electric Delivery Company LLC, Sharyland Utilities, L.P., Southwestern Electric Power Company, Southwestern Public Service Company, and Texas-New Mexico Power Company to Approve Revisions to Residential Deemed Savings to Incorporate Winter Peak Demand Impacts and Update Certain Existing Deemed Savings Values. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-317: Water Heater Tank Insulation Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. Supplemented reference for water heater set point temperature.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.5 Water Heater Installation—Electric Tankless and Fuel Substitution Measure Overview

TRM Measure ID: R-WH-WH

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Replace-on-Burnout, Early Retirement, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure involves installing a new electric tankless or gas-fueled water heater (storage or tankless) in place of an electric storage water heater.²¹⁵

Eligibility Criteria

This measure involves installing a gas storage, gas tankless (instantaneous), or electric tankless water heater in place of an electric storage water heater, and which meets all the additional requirements described below. HPWHs are not eligible for installation through this measure (see separate Heat Pump Water Heater measure). Currently, there are no conventional, electrically fueled storage units that sufficiently exceed the new federal standard to merit inclusion as an efficient condition in these deemed savings; therefore, deemed savings are only calculated for new gas storage, gas tankless, and electric tankless systems. Electric tankless water heaters may only replace systems with tanks less than 55 gallons. For the installation of an electric water heater with a tank size greater than 55 gallons, please refer to the Heat Pump Water Heater measure.

These deemed savings are for water heater replacements installed as a replace-on-burnout, new construction, or early retirement measure. However, savings are calculated under the assumption of replace-on-burnout or new construction. Savings may be awarded for installations in newly constructed homes where customer and utility representatives provide

²¹⁵ Previous versions of this measure included an incentive for installing high-efficiency conventional (electric resistance) storage water heaters. Increments to the federal standard for electric storage water heaters went into effect on April 16, 2015, eliminating the feasibility of continuing to provide deemed savings for these units.

written indication that an electric storage water heater would otherwise have been installed, along with relevant design documentation showing an electric storage water heater.

Table 2-318: Water Heater Replacement—Applicability

Application Type	Applicable
Replace-on-Burnout	Y
Early Retirement	Y
New Construction	Y*

* Subject to documentation requirements described above.

Baseline Condition

For most installations, the baseline condition is an electric storage water heater with baseline efficiency determined by tank size according to the amended federal energy efficiency standards for residential water heaters with tank sizes from 20 to 120 gallons, which took effect April 16, 2015, as published in 10 CFR Part 430.32 of the Federal Register (see Table 2-319).²¹⁶

Table 2-319: Water Heater Replacement—Baseline

Rated Storage Volume	Energy Factor*
≥ 20 gal and ≤ 55 gal	0.960—(0.0003*V _s)
> 55 gal and ≤ 120 gal	2.057—(0.00113*V _s)

*V_s is the volume of the water heater storage tank.

The new DOE efficiency standard effectively requires HPWHs (assuming electric water heating) for electric storage water heaters with tank size greater than 55 gallons. As such, electric water heaters with tanks greater than 55 gallons are not eligible for this measure. Instead, see the Heat Pump Water Heater measure. Furthermore, gas water heaters greater than 55 gallons must use HPWH baseline consumption to calculate savings, as shown in the deemed savings provided at the end of this measure.

For smaller systems, the baseline technology remains an electric storage water heater with electric resistance as the primary heat source. This baseline assumes a replace-on-burnout scenario.

High-Efficiency Condition

For water heater replacement and fuel substitution, the new unit must meet the following federal minimum energy factor shown in Table 2-320. Water heaters must be installed in accordance with local code requirements.

Table 2-321 shows storage water heater energy factors for common tank volumes.

²¹⁶ 10 CFR Part 430.32 Energy and water conservation standards and their effective dates. Accessed February 2014. Available online: <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>.

Table 2-320: Water Heater Replacement—Efficiency Standards

Energy Source	Tank Volume (unit being replaced)	Standard Energy Factor
Electric Tankless	≥ 20 gal and ≤ 55 gal	0.98*
	> 55 gal	N/A
Gas Tankless	≥ 20 gal	0.82—0.0019 × V _s
Gas Storage	≥ 20 gal and ≤ 55 gal	0.675—0.0015 × V _s
	> 55 gal	0.8012—0.00078 × V _s

* The lowest energy factor associated with an electric tankless water heater in the AHRI database was 0.98 as of March 2014. <http://www.ahridirectory.org/ahridirectory/pages/home.aspx>.

** V_s is the rated storage volume of the new water heater.

Table 2-321: Storage Water Heater Energy Factors for Common Tank Volumes (not exhaustive)

Fuel Type	Tank Volume (Gallons)			
	30	40	50	80
Baseline—Electric Storage	0.951	0.948	0.945	1.967*
Efficiency Standard—Gas Storage	0.630	0.615	0.600	0.739

* Baseline value from the Heat Pump Water Heater measure.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

All deemed savings values are calculated using the following standard algorithms for water heating. These algorithms assume a replace-on-burnout or new construction scenario, but may be used to award savings for early retirement projects.

Electric Tankless Water Heater

Energy Savings Algorithm

$$kWh_{savings} = \frac{\rho \times C_p \times GPY \times (T_{setpoint} - T_{supply,annual}) \times \left(\frac{1}{EF_{pre}} - \frac{1}{EF_{post}} \right)}{3,412}$$

Equation 88

Where:

- ρ = Water density (= 8.33 lbs/gallons)
- C_p = Specific heat of water (= 1 Btu/lb·°F)
- GPY = Estimated annual hot water use in gallons/year, specified by number of bedrooms in the home (see Table 2-322)

Table 2-322: Water Heater Consumption (gal/year)*

Climate Zone		Number of Bedrooms			
		1	2	3	4
1	Panhandle	15,476	20,171	24,866	29,561
2	North	14,778	19,244	23,710	28,177
3	South	14,492	18,864	23,236	27,608
4	Valley	14,213	18,494	22,775	27,056
5	West	14,905	19,412	23,920	28,427

* Building America Research Benchmark Definition. December 2009. Available online: <http://www.nrel.gov/docs/fy10osti/47246.pdf>.

- T_{SetPoint} = Water heater set point (= 120°F)²¹⁷
- $T_{\text{Supply,ann}}$ = Annual average mains temperature from Table 2-323
- EF_{pre} = Baseline energy factor (see Table 2-321 or calculate per Table 2-319)²¹⁸
- EF_{post} = Energy factor of new water heater
- 3,412 = Constant to convert from Btu to kWh

Table 2-323: Water Mains Temperature*

Climate Zone		Water Mains Temperature (°F)		
		$T_{\text{supply,annual}}$	$T_{\text{supply,seasonal}}$	
			Summer	Winter
1	Panhandle	62.9	73.8	53.7
2	North	71.8	84.0	60.6
3	South	74.7	84.5	65.5
4	Valley	77.2	86.1	68.5
5	West	70.4	81.5	60.4

* Based on TMY3 dataset: http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/.

²¹⁷ 120°F represents the assumed water heater setpoint. The New York Department of Public Service recommends using the water heater setpoint as a default value, see “New York Standard Approach for Estimating Energy Savings from Energy Efficiency Programs.” Page 99. October 2010. The data collection discussed in Appendix D of the EM&V team’s Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015) also supports a default value of 120°F.

²¹⁸ Note that for efficient water heater installations in newly-constructed homes, the baseline energy factor is the efficiency of the electric storage water heater that would otherwise have been installed, according to appropriate design documentation.

Demand Savings Algorithm

$kW_{savings,summer}$

$$= Ratio_{daily\ gal}^{summer\ peak\ gal} \frac{\rho \times C_p \times GPY \times (T_{setpoint} - T_{supply,summer}) \times \left(\frac{1}{EF_{pre}} - \frac{1}{EF_{post}} \right)}{365 \times 3,412}$$

Equation 89

$$kW_{savings,winter} = Ratio_{daily\ gal}^{winter\ peak\ gal} \frac{\rho \times C_p \times GPY \times (T_{setpoint} - T_{supply,winter}) \times \left(\frac{1}{EF_{pre}} - \frac{1}{EF_{post}} \right)}{365 \times 3,412}$$

Equation 90

Where:

$Ratio_{daily\ gal}^{Sumpeakgal}$ = Ratio of hot water use during the typical summer peak hour (4:00 p.m. to 5:00 p.m.) to daily hot water use (= 0.0436)

$Ratio_{daily\ gal}^{Winpeakgal}$ = Ratio of average hot water use during the winter peak hour (7:00 a.m. to 8:00 a.m.) to daily hot water use (= 0.0794)

$T_{Supply,sum}$ = Summer average water mains temperature (see Table 2-323)

$T_{Supply,win}$ = Winter average water mains temperature (see Table 2-323)

Gas Storage or Tankless Water Heater (Fuel Substitution)

Energy and demand savings awarded for replacing an electric water heater with a gas storage or gas tankless water heater are equal to the consumption of the unit replaced.

For gas storage water heaters with a tank size greater than 55 gallons, or gas tankless water heaters replacing a unit greater than 55 gallons, the appropriate baseline is a HPWH. The baseline consumption values are calculated using the federal standard baseline condition specified in the Heat Pump Water Heater measure. Savings for gas water heaters larger than 55 gallons are shown in Table 2-324 through Table 2-326.

Energy Savings Algorithm for Units Less than 55 Gallons

$$kWh_{savings} = \frac{\rho \times C_p \times GPY \times (T_{setpoint} - T_{supply,annual}) \times \left(\frac{1}{EF_{pre}} \right)}{3,412}$$

Equation 91

Demand Savings Algorithm for Units Less than 55 Gallons

$$\text{Summer } kW_{\text{savings}} = \text{Ratio}_{\text{daily gal}}^{\text{summer peak gal}} \times \frac{\rho \times C_p \times GPY \times (T_{\text{setpoint}} - T_{\text{supply,summer}}) \times \left(\frac{1}{EF_{\text{pre}}}\right)}{365 \times 3,412}$$

Equation 92

$$\text{Winter } kW_{\text{savings}} = \text{Ratio}_{\text{daily gal}}^{\text{winter peak gal}} \times \frac{\rho \times C_p \times GPY \times (T_{\text{setpoint}} - T_{\text{supply,winter}}) \times \left(\frac{1}{EF_{\text{pre}}}\right)}{365 \times 3,412}$$

Equation 93

Examples

Example 1. An old 40-gallon electric water heater in a two-bedroom home in Dallas is replaced with a new, tankless electric water heater with an energy factor of 0.99.

$$kWh_{\text{savings}} = \frac{[8.33 \times 1 \times 19,244 \times (120 - 71.8) \times \left(\frac{1}{0.948} - \frac{1}{0.99}\right)]}{3,412} = 101 \text{ kWh}$$

$$kW_{\text{savings,summer}} = 0.0436 \times \frac{[8.33 \times 1 \times 19,244 \times (120 - 84) \times \left(\frac{1}{0.948} - \frac{1}{0.99}\right)]}{365 \times 3,412} = 0.01 \text{ kW}$$

$$kW_{\text{savings,winter}} = 0.0794 \times \frac{[8.33 \times 1 \times 19,244 \times (120 - 60.6) \times \left(\frac{1}{0.948} - \frac{1}{0.99}\right)]}{365 \times 3,412} = 0.03 \text{ kW}$$

Example 2. An old 30-gallon electric water heater in a one-bedroom house in El Paso is replaced with a new gas storage water heater with an energy factor of 0.65.

$$kWh_{\text{savings}} = \frac{[8.33 \times 1 \times 14,905 \times (120 - 70.4) \times \left(\frac{1}{0.951}\right)]}{3,412} = 1,898 \text{ kWh}$$

$$kW_{\text{savings,summer}} = 0.0436 \times \frac{[8.33 \times 1 \times 14,905 \times (120 - 81.5) \times \left(\frac{1}{0.951}\right)]}{365 \times 3,412} = 0.18 \text{ kW}$$

$$kW_{\text{savings,winter}} = 0.0794 \times \frac{[8.33 \times 1 \times 14,905 \times (120 - 60.4) \times \left(\frac{1}{0.951}\right)]}{365 \times 3,412} = 0.50 \text{ kW}$$

Example 3. An old electric water heater in a two-bedroom house in Corpus Christi is replaced with a new 65-gallon gas storage water heater in a home with gas heat.

$$kWh_{\text{savings}} = 1,558 \text{ kWh}$$

$$kW_{\text{savings,summer}} = 0.14 \text{ kW}$$

$$kW_{\text{savings,winter}} = 0.33 \text{ kW}$$

Deemed Energy Savings Tables

Energy savings for gas water heaters with tanks greater than 55 gallons (or gas tankless units replacing a unit greater than 55 gallons) are provided in Table 2-324.

Table 2-324: HPWH Baseline Energy Consumption (kWh) for Gas DHW with > 55 Gallon Tanks

Climate Zone	Tank Size (Gal)	Water Heater Location/Heat Type			
		Conditioned Space			Unconditioned Space
		Gas Heat	Electric Resistance	Heat Pump	
1	55 - 64	1,873	1,059	1,520	1,830
	65 - 74	2,137	1,303	1,775	2,102
	75 +	2,403	1,550	2,033	2,378
2	55 - 64	1,553	984	1,306	1,396
	65 - 74	1,762	1,180	1,509	1,604
	75 +	1,973	1,378	1,715	1,814
3	55 - 64	1,467	906	1,223	1,249
	65 - 74	1,659	1,087	1,411	1,435
	75 +	1,853	1,270	1,600	1,623
4	55 - 64	1,382	1,050	1,238	1,135
	65 - 74	1,558	1,219	1,411	1,304
	75 +	1,736	1,390	1,586	1,474
5	55 - 64	1,585	1,015	1,338	1,457
	65 - 74	1,803	1,219	1,549	1,674
	75 +	2,022	1,426	1,763	1,893

Deemed Summer Demand Savings Tables

Summer demand savings for gas water heaters with tanks greater than 55 gallons (or gas tankless units replacing a unit greater than 55 gallons) are provided in Table 2-325.

Table 2-325: HPWH Baseline Summer Demand (kW) for Gas DHW with > 55 Gallon Tanks

Climate Zone	Tank Size (gal)	Water Heater Location	
		Conditioned Space	Unconditioned Space
1	55 - 64	0.19	0.14
	65 - 74	0.21	0.16
	75 +	0.23	0.18
2	55 - 64	0.13	0.08
	65 - 74	0.14	0.09
	75 +	0.16	0.1
3	55 - 64	0.13	0.08
	65 - 74	0.15	0.1
	75 +	0.16	0.11
4	55 - 64	0.12	0.08
	65 - 74	0.14	0.09
	75 +	0.15	0.1
5	55 - 64	0.13	0.09
	65 - 74	0.14	0.1
	75 +	0.16	0.11

Deemed Winter Demand Savings Tables

Winter demand savings for gas water heaters with tanks greater than 55 gallons (or gas tankless units replacing a unit greater than 55 gallons) are provided in Table 2-326.

Table 2-326: HPWH Baseline Winter Demand (kW) for Gas DHW with > 55 Gallon Tanks

Climate Zone	Tank Size (gal)	Water Heater Location/Heat Type			
		Conditioned Space			Unconditioned Space
		Gas Heat	Electric Resistance	Heat Pump	
1	55 - 64	0.40	0.13	0.28	0.44
	65 - 74	0.46	0.19	0.34	0.51
	75 +	0.52	0.24	0.40	0.57
2	55 - 64	0.36	0.1	0.25	0.38
	65 - 74	0.41	0.15	0.30	0.44
	75 +	0.47	0.2	0.35	0.50
3	55 - 64	0.33	0.07	0.22	0.38
	65 - 74	0.38	0.11	0.26	0.44
	75 +	0.43	0.16	0.31	0.50
4	55 - 64	0.28	0.04	0.18	0.38
	65 - 74	0.33	0.08	0.22	0.44
	75 +	0.37	0.12	0.26	0.50
5	55 - 64	0.33	0.08	0.22	0.38
	65 - 74	0.38	0.12	0.27	0.44
	75 +	0.43	0.16	0.31	0.50

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The average EULs for installed equipment are: 20 years for a tankless water heater (gas or electric) and 11 years for a high efficiency gas water heater.

These values are consistent with the EULs reported in the 2014 California DEER.²¹⁹

²¹⁹ 2014 California Database for Energy Efficiency Resources.

<http://www.deeresources.com/index.php/deer-versions/deer2013-update-for-2014-codes>.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Volume of the replacement water heater (gallons, zero if tankless)
- Volume of the existing water heater (gallons)
- Energy factor of the replacement water heater
- Number of bedrooms
- Form signed by customer and utility representative indicating planned electric storage water heater installation (New Construction only)
- Design documents indicating planned electric storage water heater installation (New Construction only)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-327: Water Heater Installation—Electric Tankless and Fuel Substitution Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	04/18/2014	TRM v2.0 update. Updated measure to require electric tankless rather than electric storage water heater installation for non-fuel-switching option. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	01/30/2015	TRM v2.1 update. Updated to reflect that new construction permitted to claim savings subject to documentation requirements, and that gas-fueled tankless water heaters are eligible for installation.
v3.0	04/10/2015	TRM v3.0 update. Amended fuel substitution savings to reflect the full consumption of the electric unit being replaced. Revised demand savings for installing an electric tankless unit to reflect daily usage patterns.
v3.1	11/05/2015	TRM v3.1 update. Clarified baseline for water heaters greater than 55 gallons.
v4.0	10/10/2016	TRM v4.0 update. Updated HPWH baseline usage for gas storage water heaters larger than 55 gallons.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.6 Heat Pump Water Heater Measure Overview

TRM Measure ID: R-WH-HW

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity and gas

Decision/Action Type(s): Replace-on-Burnout

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values (Lookup Tables)

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

The residential heat pump water heater (HPWH) measure involves the installation of an integrated or “drop-in” ENERGY STAR® HPWH. Deemed savings values are presented on a per-unit basis. Deemed savings variables include storage tank volume and HPWH installation location (in conditioned or unconditioned space). In addition, this measure accounts for the interactive air-conditioning energy savings and heating penalty associated with the HPWH when installed inside conditioned space.²²⁰

These deemed savings are calculated using the federal standards effective April 16, 2015. For measures installed prior to this date, utilities may, at their discretion, use the savings found in the Technical Reference Manual v.1.0 Implementation Guide (see <http://www.texasenergy.com/index.php/regulatory-filings/deemed-savings>).

Eligibility Criteria

This measure applies to residential, electric, storage-type water heaters with storage capacities between 40 and 80 gallons. Heat pump add-ons to existing storage water heaters are ineligible. The measure does not apply to the replacement of gas water heaters.

These deemed savings are for Heat Pump Water Heaters installed as a replace-on-burnout measure or as an early retirement measure in existing homes. However, savings are calculated under the assumption of replace-on-burnout.

²²⁰ Because the latest manufacturer standards effectively require heat pump water heaters (assuming electric water heating) for residential units with storage tank size greater than 55 gallons. As such, interactive effects are essentially the same for base and change case systems, so they are ignored.

Table 2-328: Heat Pump Water Heaters—Applicability

Application Type	Applicable	Notes
Replace-on-Burnout	Y	For replacement of electric storage water heater
Early Retirement	Y	Awarded savings calculated for replace-on-burnout
New Construction	N	

Baseline Condition

The baseline condition is an electric storage water heater (EWH) with baseline efficiency determined by tank size based on the amended federal energy efficiency standards for residential water heaters with tank sizes 20—120 gallons, as published in 10 CFR Part 430.32 of the Federal Register.²²¹

Table 2-329: Federal Standard for Residential Water Heaters

Rated Storage Volume	Energy Factor
≥ 20 gal and ≤ 55 gal	0.960—(0.0003*V _s)
> 55 gal and ≤ 120 gal	2.057—(0.00113*V _s)

Application of this equation provides the following baseline efficiency levels for electric storage water heaters.

**Table 2-330: Heat Pump Water Heaters—
Minimum Required Energy Factors for Post-2004 Water Heaters**

Tank Size (Gallons)			
40	50	60	80
0.948	0.945	1.989	1.967

The new DOE efficiency standard effectively requires heat pump water heaters (assuming electric water heating) for storage water heaters with tank size greater than 55 gallons. As such, the baseline technology for water heaters with tanks greater than 55 gallons is a heat pump water heater. For smaller systems, the baseline technology remains an electric storage water heater with electric resistance as the primary heat source. This baseline assumes a replace-on-burnout scenario.

²²¹ 10 CFR Part 430.32 Energy and water conservation standards and their effective dates. Online. Available: <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>. Accessed February 2014.

High-Efficiency Condition

The efficient condition (i.e., equipment eligible to receive an incentive through a program) is a heat pump water heater that meets ENERGY STAR® qualifications.²²² Heat pump water heaters depend on adequate ventilation for proper functioning, including adequate space for both inlet and outlet air flow, and should be installed in spaces in which temperature does not drop below a certain level. The Department of Energy recommends installation in locations that remain above 40°F year-round, and provide a minimum of 1,000 cubic feet of air space around the water heater.²²³

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Four basic variables specify the appropriate deemed demand and energy savings values for a given project:

- The climate zone
- The HPWH tank size
- The HPWH installed location (Conditioned vs. Unconditioned Space)
- For HPWH installations in conditioned space, the building heating type (electric resistance, air-source heat pump, or gas furnace)

Deemed savings are estimated using an energy factor (EF) of 2.4. This EF is the average efficiency of ENERGY STAR® HPWHs as of February 2014.²²⁴

²²² ENERGY STAR® Requirements (as of February 2014): HPWH must have a maximum current rating of 24 amperes, voltage no greater than 250 volts, and a transfer of thermal energy from one temperature to a higher temperature level for the purpose of heating water. Unit must have "integrated" or "drop-in" configuration. EF \geq 2.0, first-hour rating (FHR) \geq 50 gallons/hour, Warranty \geq 6 years on sealed systems, Safety UL 174 and UL 1995.

²²³ Heat Pump Water Heaters. Department of Energy, May 2012. Online. Available: <http://energy.gov/energysaver/articles/heat-pump-water-heaters>. Accessed: February 22, 2013.

²²⁴ As of February 2014, the ENERGY STAR® products list includes thirty residential heat pump water heaters with energy factors ranging from 2.2 to 2.75.

Deemed Energy Savings Tables

Deemed savings are developed for heat pump water heaters in four size ranges: 40-49 gallon, 50-59 gallons, 60-79 gallons, and 80 or more gallon sizes. These sizes correspond to the four basic sizes of HPWHs commercially available at the time these deemed savings were developed, according to review of manufacturer data provided on the ENERGY STAR® and AHRI websites. Table 2-331 presents the deemed saving tables for five Texas climate zones. This table assumes a replace-on-burnout scenario, but may be used to award savings for early retirement projects.

Table 2-331: Residential HPWH Deemed Annual Energy Savings (kWh)

Climate Zone		HPWH Tank Size Range (Gallons)	Conditioned Space			Unconditioned Space
			Gas Heat	Electric Resistance	Heat Pump	
1	Panhandle	40-49	1,805	1,020	1,464	1,645
		50-59	2,084	1,284	1,737	1,916
		60-79	308	308	308	320
		80+	394	394	394	409
2	North	40-49	1,533	982	1,294	1,362
		50-59	1,759	1,199	1,516	1,585
		60-79	243	243	243	245
		80+	310	310	310	313
3	South	40-49	1,449	906	1,213	1,273
		50-59	1,657	1,105	1,417	1,481
		60-79	223	223	223	219
		80+	285	285	285	280
4	Valley	40-49	1,393	1,070	1,253	1,193
		50-59	1,587	1,260	1,445	1,387
		60-79	204	204	204	199
		80+	260	260	260	255
5	West	40-49	1,554	1,003	1,315	1,409
		50-59	1,788	1,227	1,544	1,639
		60-79	253	253	253	255
		80+	324	324	324	326

Deemed Summer Demand Savings Tables

Table 2-332 presents the deemed summer demand savings for heat pump water heaters across the five Texas climate zones.

Table 2-332: Residential HPWH Deemed Summer Demand Savings (kW)

Climate Zone		HPWH Tank Size Range (Gallons)	Conditioned Space	Unconditioned Space
1	Panhandle	40-49	0.26	0.22
		50-59	0.30	0.25
		60-79	0.04	0.03
		80+	0.04	0.04
2	North	40-49	0.20	0.16
		50-59	0.22	0.18
		60-79	0.02	0.02
		80+	0.03	0.03
3	South	40-49	0.19	0.15
		50-59	0.22	0.18
		60-79	0.02	0.02
		80+	0.03	0.03
4	Valley	40-49	0.18	0.14
		50-59	0.21	0.17
		60-79	0.02	0.02
		80+	0.03	0.02
5	West	40-49	0.21	0.17
		50-59	0.24	0.20
		60-79	0.03	0.02
		80+	0.03	0.03

Deemed Winter Demand Savings Tables

Table 2-333 presents the deemed winter demand savings for heat pump water heaters across the five Texas climate zones.

Table 2-333: Residential HPWH Deemed Winter Demand Savings (kW)

Climate Zone		HPWH Tank Size Range (Gallons)	Conditioned Space			Unconditioned Space
			Gas Heat	Electric Resistance	Heat Pump	
1	Panhandle	40-49	0.45	0.00	0.32	0.41
		50-59	0.52	0.22	0.39	0.48
		60-79	0.08	0.08	0.08	0.09
		80+	0.11	0.11	0.11	0.12
2	North	40-49	0.39	0.00	0.27	0.37
		50-59	0.46	0.16	0.33	0.43
		60-79	0.07	0.07	0.07	0.08
		80+	0.09	0.09	0.09	0.10
3	South	40-49	0.35	0.00	0.23	0.34
		50-59	0.41	0.12	0.28	0.39
		60-79	0.07	0.07	0.07	0.07
		80+	0.08	0.08	0.08	0.09
4	Valley	40-49	0.33	0.00	0.20	0.32
		50-59	0.38	0.09	0.25	0.37
		60-79	0.06	0.06	0.06	0.06
		80+	0.08	0.08	0.08	0.08
5	West	40-49	0.39	0.00	0.27	0.37
		50-59	0.46	0.16	0.33	0.43
		60-79	0.07	0.07	0.07	0.08
		80+	0.09	0.09	0.09	0.10

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The Estimated Useful Life for this measure is 13 years. This EUL is consistent with the judgment of the American Council for an Energy-Efficient Economy as listed on its website.²²⁵

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- The approximate volume of the replacement heat pump water heater tank in gallons
- The baseline energy factor (EF)
- The EF of the replacement water heater
- Water heater type (e.g., heat pump, electric resistance)
- The installed location (conditioned vs. unconditioned space)
- For heat pump water heater installations in conditioned space, the building heating type (electric resistance, air-source heat pump, or gas furnace)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

This section is not applicable.

²²⁵ Water Heating. American Council for an Energy Efficient Economy. Online. Available: <http://www.aceee.org/consumer/water-heating>. Accessed: September 2011.

Document Revision History

Table 2-334: Heat Pump Water Heater Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	04/18/2014	TRM v2.0 update. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	01/30/2015	TRM v2.1 update. No revision.
v3.0	04/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. No revision.
v4.0	10/10/2016	TRM v4.0 update. Consolidated table formats.
v5.0	10/2017	TRM v5.0 update. No revision.

2.4.7 Water Heater Replacement—Solar Water Heating Measure Overview

TRM Measure ID: R-WH-WS

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

Solar water heating deemed savings values are calculated based on the Solar Rating and Certification Corporation's (SRCC) test for solar water heaters (test OG-300).

Eligibility Criteria

These deemed savings are for solar water heaters installed as a replace-on-burnout measure or as an early retirement measure in existing homes. However, savings are calculated under the assumption of replace-on-burnout.

Baseline Condition

This section is not applicable.

High-Efficiency Condition

Only solar water heaters meeting the SRCC OG-300 standard (based on tank size and final Solar Energy Factor-SEF) qualify for these deemed savings estimates.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Solar water heating values are on a per-unit basis. Deemed savings variables include tank volume and installed-unit Solar Energy Factor (SEF) as rated in the Solar Rating and Certification Corporation (SRCC) "Summary of SRCC Certified Solar Collector and Water Heating System Ratings." The Solar Energy Factor (SEF) is determined under SRCC's Operating Guideline 300, "Operating Guidelines and Minimum Standards for Certifying Solar Water Heating Systems" and was developed as a means to compare solar water heating systems with conventional water heating systems rated with an Energy Factor (EF) and listed in the Gas Appliance Manufacturers Association Directory of Certified Water Heating Products.

Both EF and SEF are based on the same environmental and hot water use conditions used in the DOE Test Procedures for Water Heaters. The only significant difference is that the DOE test does not specify solar radiation. So SRCC uses a 1500 Btu/sq.ft./day solar radiation profile—a value typical of Sunbelt states (note - the annual average solar radiation for Dallas is 1533 Btu/sq.ft./day. (Information on the SRCC can be found at <http://www.solar-rating.org/>.)

Examples

A passive Sun Earth CP-40 with a SEF of 1.4 would consume 2133 kWh (2987/1.4), saving 1323 kWh compared to a baseline 50-gallon water heater that consumes 3458 kWh (values based on Frontier data).

An active HelioType HP 410 G 80 with a SEF of 2.0 would consume 1494 kWh (2987/2), saving 1965 kWh compared to the baseline 50-gallon water heater.

Use SRCC OG-300 Test to Obtain SEF

SRCC = Solar Rating and Certification Corporation

OG-300 = test standard for SWH systems

SEF = Solar Energy Factor

Calculate kWh Savings

$$kWh\ savings = standard\ load \times \left(1 - \frac{EF}{SEF}\right) = (3,458) \times \left(1 - \frac{0.864}{2}\right) = 1,965 kWh$$

Deemed Energy Savings Tables

The following table presents the energy savings for solar water heaters based on tank size and final Solar Energy Factor (SEF).

Table 2-335: Solar Water Heating Energy Savings (kWh)

Water Heating Replacements—Solar Water Heating Energy Savings			
Approximate Volume (gal)	80	50	30
Baseline (DOE Standard) EF	0.82	0.86	0.89
SRCC OG-300 Solar Energy Factor	Energy Savings (kWh)		
1.0	637	471	368
1.1	909	743	640
1.2	1,135	969	866
1.3	1,326	1,160	1,057
1.4	1,490	1,324	1,221
1.5	1,633	1,467	1,364
1.6	1,757	1,591	1,488
1.7	1,867	1,701	1,598
1.8	1,965	1,799	1,696
1.9	2,052	1,886	1,783
2.0	2,131	1,965	1,862
2.1	2,202	2,036	1,933
2.2	2,266	2,100	1,997
2.3	2,325	2,159	2,056
2.4	2,379	2,213	2,110
2.5	2,429	2,263	2,160
2.6	2,475	2,309	2,206
2.7	2,518	2,352	2,249
2.8	2,557	2,391	2,288
2.9	2,594	2,428	2,325
3.0	2,628	2,462	2,359
3.1	2,660	2,494	2,391
3.2	2,691	2,525	2,422
3.3	2,719	2,553	2,450
3.4	2,745	2,579	2,476
3.5	2,771	2,605	2,502
3.6	2,794	2,628	2,525
3.7	2,817	2,651	2,548
3.8	2,838	2,672	2,569
3.9	2,858	2,692	2,589
4.0	2,877	2,711	2,608
4.1	2,895	2,729	2,626
4.2	2,913	2,747	2,644
4.3	2,929	2,763	2,660
4.4	2,945	2,779	2,676

Water Heating Replacements—Solar Water Heating Energy Savings			
Approximate Volume (gal)	80	50	30
Baseline (DOE Standard) EF	0.82	0.86	0.89
SRCC OG-300 Solar Energy Factor	Energy Savings (kWh)		
4.5	2,960	2,794	2,691
4.6	2,975	2,809	2,706
4.7	2,988	2,822	2,719
4.8	3,002	2,836	2,733
4.9	3,014	2,848	2,745
5.0	3,027	2,861	2,758

Source: Tim Kerrigan, National Renewable Energy Laboratory (2001)

Deemed Summer Demand Savings Tables

The following table presents the demand savings for solar water heaters.

Table 2-336: Solar Water Heating Demand Savings (kW)

Solar Water Heating Demand Savings kW
0.42

Diversified value fully displaced during solar peak.

This value is consistent with Univ. of Texas study (0.4)

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of a solar water heater is established at 15 years.

This value is consistent with the EUL reported in the 2014 California Database for Energy Efficiency Resources (DEER).²²⁶

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- The approximate volume of the replacement water heater in gallons
- SRCC OG-300 Solar Energy Factor of the replacement unit

References and Efficiency Standards

Petitions and Rulings

- Docket No. 22241, Item 62. Petition by Frontier Associates for Approval of Second Set of Deemed Savings Estimates. Public Utility Commission of Texas.
- Docket No. 27903. Order Adopting New §25.184 as Approved at the August 21, 2003 Open Meeting and Submitted to the Secretary of State. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

This section is not applicable.

Document Revision History

Table 2-337: Water Heater Replacement—Solar Water Heating Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. No revision.
v3.1	11/05/2015	TRM v3.1 update. No revision.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. No revision.

²²⁶ 2014 California Database for Energy Efficiency Resources.

<http://www.deeresources.com/index.php/deer-versions/deer2013-update-for-2014-codes>.

2.4.8 Showerhead Temperature Sensitive Restrictor Valves Measure Overview

TRM Measure ID: R-WH-TV

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity, Gas

Decision/Action Type(s): Retrofit, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure consists of installing a temperature sensitive restrictor valve (TSRV)²²⁷ between the existing shower arm and showerhead. The valve will restrict hot water flow through the showerhead once the water reaches a set temperature (generally 95°F) to prevent water from going down the drain prior to the user entering the shower, thereby eliminating behavioral waste.

Eligibility Criteria

The incentive is for installment of a temperature sensitive restrictor valve between the existing shower arm and showerhead.

These deemed savings are for temperature sensitive restrictor valves installed in new construction or as a retrofit measure in existing homes. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity or gas.

Table 2-338: Showerheads with Temperature Sensitive Restrictor Valve—Applicability

Application Type	Applicable
Retrofit	Y
New Construction	Y

²²⁷ A temperature sensitive restrictor valve is any device that uses water temperature to regulate water flow in showers.

Baseline Condition

The baseline condition is the residential shower arm and standard (2.5 gpm) showerhead without a temperature sensitive restrictor valve installed.

High-Efficiency Condition

To qualify for temperature sensitive restrictor valve deemed savings, the installed equipment must be a temperature sensitive restrictor valve installed on a residential showerarm and showerhead with either a standard (2.5 gpm) or low-flow (2.0, 1.75, or 1.5 gpm) showerhead. If this measure is installed in conjunction with a low-flow showerhead, refer to the Low-Flow Showerheads measure and claim additional savings as outlined in that measure.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Estimated Hot Water Usage Reduction

Baseline and efficiency-standard water usages per capita were derived from an analysis of metered studies of residential water efficiency retrofit projects conducted for Seattle, WA; the East Bay Municipal Utility District (CA); and Tampa, FL.^{228,229,230}

To determine gallons of behavioral waste (defined as hot water that goes down the drain before the user enters the shower) per year, the following formula was used:

$$\text{Annual Showerhead Behavioral Waste} = SHFR \times BW \times n_S \times 365 \frac{\text{days}}{\text{year}} \times \frac{n_O}{n_{SH}}$$

Equation 94

Where:

$SHFR$	=	Showerhead flow rate, gallons per minute (gpm) (see Table 2-339)
BWC_P	=	Behavioral waste, minutes per shower (see Table 2-339)
$n_S C_P$	=	Number of showers per person per day (see Table 2-339)
$365 C_P$	=	Constant to convert days to years (see Table 2-339)

²²⁸ Seattle Home Water Conservation Study: "The Impacts of High Efficiency Plumbing Fixture Retrofits in Single-Family Homes." December 2000.

<http://allianceforwaterefficiency.org/WorkArea/linkit.aspx?LinkIdentifier=id&ItemID=856>.

²²⁹ Residential Indoor Water Conservation Study: "Evaluation of High Efficiency Indoor Plumbing Fixture Retrofits in Single-Family Homes in the East Bay Municipal Utility District Service Area." July 2003.

http://www.ebmud.com/sites/default/files/pdfs/residential_indoor_wc_study_0.pdf.

²³⁰ Tampa Water Department Residential Water Conservation Study: "The Impacts of High Efficiency Plumbing Fixture Retrofits in Single-Family Homes." January 8, 2004.

www.cuwcc.org/WorkArea/downloadasset.aspx?id=12162.

n_{oC_p} = Number of occupants per home (see Table 2-339)

n_{SHC_p} = Number of showerheads per home (see Table 2-339)

Applying the formula to the values used for Texas from Table 2-339 returns the following values for baseline behavioral waste in gallons per showerhead per year:

$$\text{Showerhead (2.5 GPM): } 2.5 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} = 854 \text{ gal}$$

$$\text{Showerhead (2.0 GPM): } 2.0 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} = 683 \text{ gal}$$

$$\text{Showerhead (1.75 GPM): } 1.75 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} = 598 \text{ gal}$$

$$\text{Showerhead (1.5 GPM): } 1.5 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} = 513 \text{ gal}$$

Gallons of hot water saved per year can be found by multiplying the baseline behavioral waste gallons per year by the percent of hot water from Table 2-339.

$$\text{Gallons of hot water saved per year} = \text{Annual Behavioral Waste} \times \text{HW\%}$$

Equation 95

Where:

HW\% = Hot water percentage (see Table 2-339)

$$\text{Gallons of hot water saved per year (2.5 GPM): } 854 \times 0.825 = 705 \text{ gal}$$

$$\text{Gallons of hot water saved per year (2.0 GPM): } 683 \times 0.825 = 563 \text{ gal}$$

$$\text{Gallons of hot water saved per year (1.75 GPM): } 598 \times 0.825 = 493 \text{ gal}$$

$$\text{Gallons of hot water saved per year (1.5 GPM): } 513 \times 0.825 = 423 \text{ gal}$$

Table 2-339: Estimated Showerhead with TSRV Hot Water Usage Reduction

Description	2.5 gpm	2.0 gpm	1.75 gpm	1.5 gpm
Average behavioral waste (minutes per shower) ²³¹	0.783	0.783	0.783	0.783
Showers/person/day ²³²	0.72	0.72	0.72	0.72
Occupants per home ²³³	2.79	2.79	2.79	2.79

²³¹ Average behavioral waste from Lutz (2004) Feasibility Study and Roadmap to Improve Residential Hot Water Distribution Systems and Sherman (2014) Disaggregating Residential Shower Warm-Up Waste. Derived by dividing 47 seconds by 60 seconds.

²³² Occupants per home for Texas from US Census Bureau, Texas, "Persons per household, 2007-2011." Accessed January 2013 <http://quickfacts.census.gov/qfd/states/48000.html>.

²³³ Derivation of value for showers per person per day defined in the Low Flow Showerhead measure.

Description	2.5 gpm	2.0 gpm	1.75 gpm	1.5 gpm
Showerheads per home ²³⁴	1.68	1.68	1.68	1.68
Gallons behavioral waste per showerhead per year	1,018	814	713	611
Percent hot water ²³⁵	82.5%	82.5%	82.5%	82.5%
Gallons hot water saved per year	705	563	493	423

Energy Savings Algorithms

Energy savings for this measure are calculated as follows:

$$\text{Energy Savings per TSRV} = \frac{\rho \times C_p \times V \times (T_{\text{SetPoint}} - T_{\text{SupplyAverage}})}{RE \times \text{Conversion Factor}}$$

Equation 96

Where:

- ρ = Water density, 8.33 lbs/gallon
- C_p = Specific heat of water, 1 Btu/lb°F
- V = Gallons of hot water saved per year per showerhead (see Table 2-339)
- T_{SetPoint} = Water heater setpoint: 120°F²³⁶
- T_{Supply} = Average supply water temperature (see Table 2-340)
- RE = Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters, 2.2 for heat pump water heaters, or 0.8 for gas hot water heaters.²³⁷

ConversionFactor = 3,412 Btu/kWh for electric or 100,000 Btu/therm for gas

²³⁴ Showerheads per home assumed to be equal to the number of full bathrooms per home, taken from 2009 RECS, Table HC2.10.

²³⁵ Average percent hot water from (Lutz 2004) Feasibility Study and Roadmap to Improve Residential Hot Water Distribution Systems and (Sherman 2015) Calculating Savings For: Auto-Diverting Tub Spout System with ShowerStart TSV.

²³⁶ 120°F represents the assumed water heater setpoint. New York Department of Public Service recommends using water heater setpoint as a default value, see "New York Standard Approach for Estimating Energy Savings from Energy Efficiency Programs" October 2010, page 99.

Data collection discussed in Appendix D of the EM&V team's Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

²³⁷ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at http://cafs.ahrinet.org/gama_cafs/sdpsearch/search.jsp?table=CWH.

Demand Savings Algorithms

Demand savings will be calculated using the following formula:

$$\text{Demand Savings per TSRV} = \frac{\rho \times C_p \times V \times (T_{\text{SetPoint}} - T_{\text{SupplySeasonal}})}{RE \times \text{Conversion Factor}} \times \text{Ratio}_{\text{annual kWh}}^{\text{Peak seasonal kW}}$$

Equation 97

Where:

$T_{\text{SupplySeasonal}}$ = Seasonal supply water temperature (see Table 2-340)

$\text{Ratio}_{\text{annual kWh}}^{\text{Peak seasonal kW}}$ = Ratio of peak seasonal kW to annual kWh savings (see Table 2-341)

Table 2-340: Water Mains Temperature

Climate Zone	Water Mains Temperature (°F) ²³⁸		
	$T_{\text{SupplyAverage}}$	$T_{\text{SupplySeasonal}}$	
		Summer	Winter
Climate Zone 1: Panhandle	62.9	73.8	53.7
Climate Zone 2: North	71.8	84.0	60.6
Climate Zone 3: South	74.7	84.5	65.5
Climate Zone 4: Valley	77.2	86.1	68.5
Climate Zone 5: West	70.4	81.5	60.4

Table 2-341: Water Fixture Peak Demand Ratios


Peak Demand Ratios ²³⁹	
Summer	Winter
0.000110	0.000274

The fixture peak demand ratios were derived by taking the fraction hot water use during the peak hour (summer: 4-5pm, winter: 7-8am) to the total daily usage from the Building America Performance Analysis Procedures for Existing Homes, and dividing it by the number of days per year (365). The fraction of hot water use during the winter peak hour to total daily water usage is 0.1: $0.1/365=0.000274$. The summer peak hour to total daily water usage is 0.04: $0.04/365=0.000110$.

²³⁸ Based on typical meteorological year (TMY) dataset for TMY3:

http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/.

²³⁹ US Department of Energy's "Building America Performance Analysis Procedures for Existing Homes" combined domestic hot water use profile (<http://www.nrel.gov/docs/fy06osti/38238.pdf>).

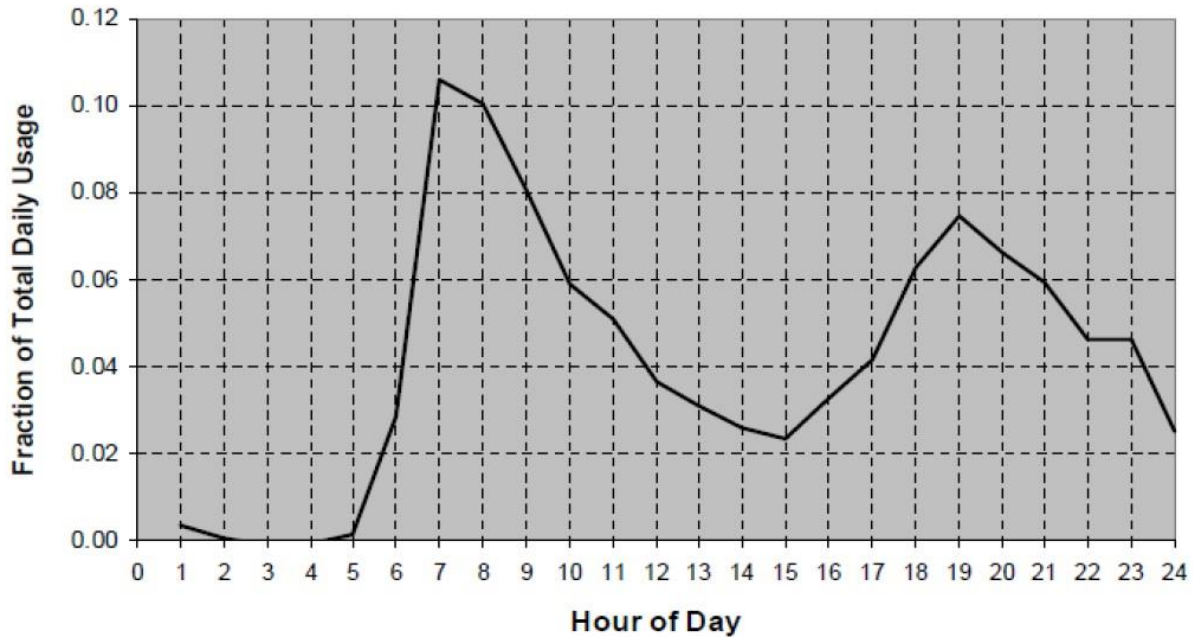

Source: Building America Performance Analysis Procedures for Existing Homes

Figure 2-8: Shower, Bath, and Sink Hot Water Use Profile

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) for this measure is established at 10 years.

This value is consistent with the EUL reported for a low-flow showerhead in the 2014 California Database for Energy Efficiency Resources (DEER).²⁴⁰

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Recovery Efficiency (RE) or COP, if available
- Flow rate in gallons per minute (gpm) of showerhead installed
- Water heater type (e.g., heat pump, electric resistance)

Document Revision History

Table 2-342: Showerhead Temperature Sensitive Restrictor Valve Revision History

TRM Version	Date	Description of Change
v5.0	10/2017	TRM v5.0 origin.

²⁴⁰ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

2.4.9 Tub Spout and Showerhead Temperature Sensitive Restrictor Valves Measure Overview

TRM Measure ID: R-WH-TS

Market Sector: Residential

Measure Category: Water Heating

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity, Gas

Decision/Action Type(s): Retrofit, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure consists of replacing existing tub spouts and shower heads with an automatically diverting tub spout and showerhead system with a temperature sensitive restrictor valve (TSRV)²⁴¹ between the existing shower arm and showerhead. The tub spout will contain temperature sensitive restrictor technology that will cause the tub spout to automatically engage the anti-leak diverter once the water reaches a set temperature (generally 95°F). The water will divert to a showerhead with a normally closed valve that will prevent the hot water from going down the drain prior to the user entering the shower, thereby eliminating behavioral waste and tub spout leakage waste.

Eligibility Criteria

The incentive is for installment of an automatically diverting tub spout and showerhead system with temperature sensitive restrictor technology.

These deemed savings are for tub spout and showerhead systems with temperature sensitive restrictor technology installed in new construction or as a retrofit measure in existing homes. In order to be awarded these deemed savings, the fuel type of the water heater must be electricity or gas.

²⁴¹ A temperature sensitive restrictor valve is any device that uses water temperature to regulate water flow in showers.

Table 2-343: Tub Spout and Showerhead System with Temperature Sensitive Restrictor Valve—Applicability

Application Type	Applicable
Retrofit	Y
New Construction	Y

Baseline Condition

The baseline condition is the residential tub spout with a standard diverter, and a standard (2.5 gpm) showerhead.

High-Efficiency Condition

To qualify for tub spout and showerhead system with temperature sensitive restrictor technology deemed savings, the installed equipment must be an anti-leak, automatically diverting tub spout system with temperature sensitive restrictor technology installed on a residential showerarm and showerhead with a standard (2.5 gpm) or low-flow (2.0, 1.75, or 1.5 gpm) showerhead. If this measure is installed in conjunction with a low-flow showerhead, refer to the Low-Flow Showerheads measure and claim additional savings as outlined in that measure.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Estimated Hot Water Usage Reduction

Baseline and efficiency-standard water usages per capita were derived from an analysis of metered studies of residential water efficiency retrofit projects conducted for Seattle, WA; the East Bay Municipal Utility District (CA); and Tampa, FL.^{242,243,244}

This system provides savings in two parts: elimination of behavioral waste (hot water that goes down the drain prior to the user entering the shower) and elimination of tub spout diverter leakage.

²⁴² Seattle Home Water Conservation Study: “The Impacts of High Efficiency Plumbing Fixture Retrofits in Single-Family Homes.” December 2000.

<http://allianceforwaterefficiency.org/WorkArea/linkit.aspx?LinkIdentifier=id&ItemID=856>.

²⁴³ Residential Indoor Water Conservation Study: “Evaluation of High Efficiency Indoor Plumbing Fixture Retrofits in Single-Family Homes in the East Bay Municipal Utility District Service Area.” July 2003.

http://www.ebmud.com/sites/default/files/pdfs/residential_indoor_wc_study_0.pdf.

²⁴⁴ Tampa Water Department Residential Water Conservation Study: “The Impacts of High Efficiency Plumbing Fixture Retrofits in Single-Family Homes.” January 8, 2004.

www.cuwcc.org/WorkArea/downloadasset.aspx?id=12162.

Part 1: To determine baseline gallons of behavioral waste per year, the following formula was used:

$$\text{Annual Showerhead Behavioral Waste} = \%WUE_{SH} \times SHFR \times BW \times n_S \times 365 \frac{\text{days}}{\text{year}} \times \frac{n_O}{n_{SH}}$$

Equation 98

$$\text{Annual Tub Spout Behavioral Waste} = \%WUE_{TS} \times TSFR \times BW \times n_S \times 365 \frac{\text{days}}{\text{year}} \times \frac{n_O}{n_{SH}}$$

Equation 99

Where:

- $\%WUE_{SH}$ = Showerhead percentage of warm-up events (see Table 2-344)
- $\%WUE_{TS}$ = Tub spout percentage of warm-up events (see Table 2-344)
- $SHFR$ = Showerhead flow rate, gallons per minute (gpm) (see Table 2-344)
- $TSFR$ = Tub spout flow rate, gallons per minute (gpm) (see Table 2-344)
- BWC_P = Behavioral waste, minutes per shower (see Table 2-344)
- n_{SC_P} = Number of showers per person per day (see Table 2-344)
- $365C_P$ = Constant to convert days to years (see Table 2-344)
- n_{OC_P} = Number of occupants per home (see Table 2-344)
- n_{SHC_P} = Number of showerheads per home (see Table 2-344)

Applying the formula to the values used for Texas from Table 2-344 returns the following values:

$$\text{Showerhead (1.5 GPM): } 0.6 \times \left(1.5 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} \right) = 308$$

$$\text{Showerhead (1.75 GPM): } 0.6 \times \left(1.75 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} \right) = 359$$

$$\text{Showerhead (2.0 GPM): } 0.6 \times \left(2.0 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} \right) = 410$$

$$\text{Showerhead (2.5 GPM): } 0.6 \times \left(2.5 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} \right) = 513$$

$$\text{Tub Spout (5.0 GPM): } 0.4 \times \left(5.0 \times 0.783 \times 0.72 \times 365 \times \frac{2.79}{1.68} \right) = 683$$

Part 2: To determine baseline gallons of diverter leakage per year, the following formula was used:

$$\text{Annual Diverter Waste} = \text{DLR} \times t_s \times n_s \times 365 \frac{\text{days}}{\text{year}} \times \frac{n_o}{n_{SH}}$$

Equation 100

Where:

DLR = Diverter leakage rate (gpm) (see Table 2-344)

t_s = Shower time (min/shower) (see Table 2-344)

Applying the formula to the values used for Texas from Table 2-344 returns the following values:

$$\text{Diverter (0.8 GPM): } 0.8 \times 5.68 \times 0.72 \times 365 \times \frac{2.79}{1.68} = 1,983$$

Part 3: To determine gallons of water saved per year can be found by multiplying the total waste by the percent of hot water from Table 2-344.

$$\text{Gallons of hot water saved} = (\text{SHBW} + \text{TSBW}) \times \text{HW}\%_{\text{SH,TS}} + \text{DW} \times \text{HW}\%_{\text{D}}$$

Equation 101

Where:

SHBW = Showerhead behavioral waste (gal)

TSBW = Tub spout behavioral waste (gal)

DW = Diverter waste (gal)

HW%_{SH,TS} = Showerheads and tub spout hot water percentage (see Table 2-344)

HW%_D = Diverter hot water percentage (see Table 2-344)

Applying the formula to the values used for Texas from Table 2-344 returns the following values:

$$\text{Total Annual Waste (1.5 gpm): } (308 + 683) \times 0.825 + 1,983 \times 0.737 = 2,279$$

$$\text{Total Annual Waste (1.75 gpm): } (359 + 683) \times 0.825 + 1,983 \times 0.737 = 2,321$$

$$\text{Total Annual Waste (2.0 gpm): } (410 + 683) \times 0.825 + 1,983 \times 0.737 = 2,363$$

$$\text{Total Annual Waste (2.5 gpm): } (513 + 683) \times 0.825 + 1,983 \times 0.737 = 2,448$$

Table 2-344: Estimated Tub Spout/Showerhead System with TSRV Hot Water Usage Reduction

Description	Part 1- Behavioral Waste		Part 2— Diverter Leakage	Part 3— Total
	Showerhead Warm-up	Tub spout Warm-up		
Baseline showerhead flow rate (gpm)	1.5, 1.75, 2.0, or 2.5		N/A	
Tub spout flow rate (gpm) ²⁴⁵	N/A	5.0	N/A	
Percent of warm up events ²⁴⁶	60	40	N/A	
Average behavioral waste (minutes per shower) ²⁴⁷	0.783	0.783	N/A	
Average diverter leak rate (gpm) ²⁴⁸		N/A	0.80	N/A
Average shower time (minutes) ²⁴⁹		N/A	5.68	N/A
Showers/person/day ²⁵⁰	0.72	0.72	0.72	0.72
Occupants per home ²⁵¹	2.79	2.79	2.79	2.79
Showerheads per home ²⁵²	1.68	1.68	1.68	1.68
Gallons behavioral waste per tub spout/showerhead per year (1.5 gpm)	308	683	1,983	2,974
Gallons behavioral waste per tub spout/showerhead per year (1.75 gpm)	359	683	1,983	3,025
Gallons behavioral waste per tub spout/showerhead per year (2.0 gpm)	410	683	1,983	3,076
Gallons behavioral waste per tub spout/showerhead per year (2.5 gpm)	513	683	1,983	3,179
Percent hot water ²⁵³	82.5%	82.5%	73.7%	N/A
Gallons hot water saved per year (1.5 gpm)	N/A	N/A	N/A	2,279
Gallons hot water saved per year (1.75 gpm)	N/A	N/A	N/A	2,321

²⁴⁵ Assumption from (Sherman 2015) Calculating Savings For: Auto-Diverting Tub Spout System with ShowerStart TSV.

²⁴⁶ Percent of warm up events from (Sherman 2014) Disaggregating Residential Shower Warm-Up Waste (Appendix B, Question 8).

²⁴⁷ Average behavioral waste from Lutz (2004) Feasibility Study and Roadmap to Improve Residential Hot Water Distribution Systems and Sherman (2014) Disaggregating Residential Shower Warm-Up Waste. Derived by dividing 47 seconds by 60 seconds.

²⁴⁸ Average diverter leak rate from (Taitem 2011) Taitem Tech Tip – Leaking Shower Diverter.

²⁴⁹ Average shower time from (REUWS 1999) Residential End Uses of Water Study and (Sherman 2015) Calculating Savings For: Auto-Diverting Tub Spout System with ShowerStart TSV.

²⁵⁰ Derivation of value for showers per person per day defined in the Low Flow Showerhead measure.

²⁵¹ Occupants per home for Texas from US Census Bureau, Texas, “Persons per household, 2007-2011.” Accessed January 2013 <http://quickfacts.census.gov/qfd/states/48000.html>.

²⁵² Showerheads per home assumed to be equal to the number of full bathrooms per home, taken from 2009 RECS, Table HC2.10.

²⁵³ Average percent hot water for warm up events from (Lutz 2004) Feasibility Study and Roadmap to Improve Residential Hot Water Distribution Systems and (Sherman 2015) Calculating Savings For: Auto-Diverting Tub Spout System with ShowerStart TSV.

Description	Part 1- Behavioral Waste		Part 2— Diverter Leakage	Part 3— Total
	Showerhead Warm-up	Tub spout Warm-up		
Gallons hot water saved per year (2.0 gpm)	N/A	N/A	N/A	2,363
Gallons hot water saved per year (2.5 gpm)	N/A	N/A	N/A	2,448

Energy Savings Algorithms

Energy savings for this measure are calculated as follows:

$$\text{Energy Savings per TS System} = \frac{\rho \times C_p \times V \times (T_{\text{SetPoint}} - T_{\text{SupplyAverage}})}{RE \times \text{Conversion Factor}}$$

Equation 102

Where:

- ρ = Water density, 8.33 lbs/gallon
- C_p = Specific heat of water, 1 Btu/lb°F
- V = Gallons of hot water saved per year per showerhead (see Table 2-344)
- T_{SetPoint} = Water heater setpoint: 120°F²⁵⁴
- T_{Supply} = Average supply water temperature (see Table 2-345)
- RE = Recovery Efficiency (or in the case of heat pump water heaters, COP). If unknown, use 0.98 as a default for electric resistance water heaters, 2.2 for heat pump water heaters, or 0.8 for gas hot water heaters.²⁵⁵

ConversionFactor = 3,412 Btu/kWh for electric or 100,000 Btu/therm for gas

²⁵⁴ 120°F represents the assumed water heater setpoint. New York Department of Public Service recommends using water heater setpoint as a default value, see “New York Standard Approach for Estimating Energy Savings from Energy Efficiency Programs” October 2010, page 99.

Data collection discussed in Appendix D of the EM&V team’s Annual Statewide Portfolio Report for Program Year 2014-Volume 1, Project Number 40891 (August 2015), also supports a default value of 120°F.

²⁵⁵ Default values based on median recovery efficiency of residential water heaters by fuel type in the AHRI database, at http://cafs.ahrinet.org/gama_cafs/sdpsearch/search.jsp?table=CWH.

Demand Savings Algorithms

Demand savings will be calculated using the following formula:

$$Demand\ Savings\ per\ TS\ System = \frac{\rho \times C_p \times V \times (T_{SetPoint} - T_{SupplySeasonal})}{RE \times Conversion\ Factor} \times Ratio_{\frac{Peak\ seasonal\ kW}{annual\ kWh}}$$

Equation 103

Where:

$T_{SupplySeasonal}$ = Seasonal supply water temperature (see Table 2-345)

$Ratio_{\frac{Peak\ seasonal\ kW}{annual\ kWh}}$ = Ratio of peak seasonal kW to annual kWh savings (see Table 2-346)

Table 2-345: Water Mains Temperature

Climate Zone	Water Mains Temperature (°F) ²⁵⁶		
	$T_{SupplyAverage}$	$T_{SupplySeasonal}$	
		Summer	Winter
Climate Zone 1: Panhandle	62.9	73.8	53.7
Climate Zone 2: North	71.8	84.0	60.6
Climate Zone 3: South	74.7	84.5	65.5
Climate Zone 4: Valley	77.2	86.1	68.5
Climate Zone 5: West	70.4	81.5	60.4

Table 2-346: Water Fixture Peak Demand Ratios


Peak Demand Ratios ²⁵⁷	
Summer	Winter
0.000110	0.000274

The fixture peak demand ratios were derived by taking the fraction hot water use during the peak hour (summer: 4-5pm, winter: 7-8am) to the total daily usage from the Building America Performance Analysis Procedures for Existing Homes, and dividing it by the number of days per year (365). The fraction of hot water use during the winter peak hour to total daily water usage is 0.1: $0.1/365=0.000274$. The summer peak hour to total daily water usage is 0.04: $0.04/365=0.000110$.

²⁵⁶ Based on typical meteorological year (TMY) dataset for TMY3:

http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/.

²⁵⁷ US Department of Energy's "Building America Performance Analysis Procedures for Existing Homes" combined domestic hot water use profile (<http://www.nrel.gov/docs/fy06osti/38238.pdf>).

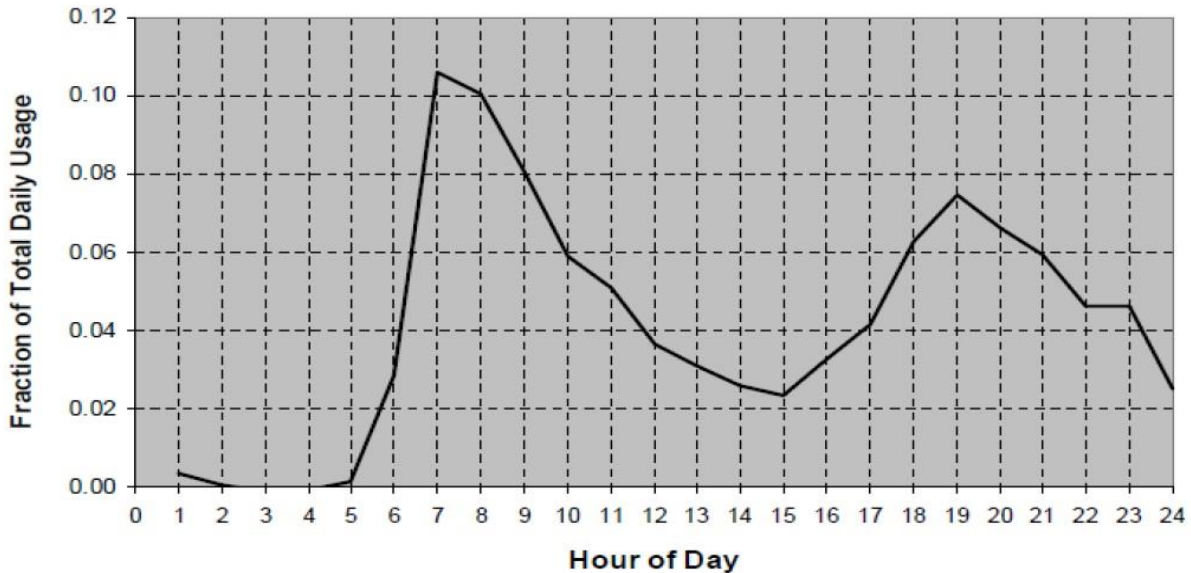

Source: Building America Performance Analysis Procedures for Existing Homes

Figure 2-9: Shower, Bath, and Sink Hot Water Use Profile

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) for this measure is established at 10 years.

This value is consistent with the EUL reported for a low-flow showerhead in the 2014 California Database for Energy Efficiency Resources (DEER).²⁵⁸

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Recovery Efficiency (RE) or COP, if available
- Flow rate in gallons per minute (GPM) of showerhead installed
- Water heater type (e.g., heat pump, electric resistance)

Document Revision History

Table 2-347: Tub Spout and Showerhead Temperature Sensitive Restrictor Valve Revision History

TRM Version	Date	Description of Change
v5.0	10/2017	TRM v5.0 origin.

²⁵⁸ 2014 California Database for Energy Efficiency Resources.
<http://www.deeresources.com/index.php/deer2013-update-for-2014-codes>.

2.5 RESIDENTIAL: APPLIANCES

2.5.1 ENERGY STAR® Ceiling Fans Measure Overview

TRM Measure ID: R-AP-FN

Market Sector: Residential

Measure Category: Appliances

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This document presents the accepted deemed savings awarded for the installation of an ENERGY STAR® ceiling fan and light kit. Savings are awarded at a flat per unit rate, both for energy and demand savings. This measure will apply to existing homes and new construction.

Eligibility Criteria

This section is not applicable.

Baseline Condition

The baseline is a conventional non-ENERGY STAR® labeled ceiling fan and light kit.

High-Efficiency Condition

Table 2-348 displays the ENERGY STAR® requirements for eligible ceiling fans as of April 1, 2012. These values are subject to updates in ENERGY STAR® specifications; energy efficiency service providers are expected to comply with the latest ENERGY STAR® code.

Table 2-348: ENERGY STAR® Specifications for Ceiling Fans

ENERGY STAR® Specifications for Ceiling Fans	
1.	Specification defines residential ceiling fan airflow efficiency on a performance basis: CFM of airflow per watt of power consumed by the motor and controls. Efficiency is measured on each of three speeds (low/medium/high).
2.	At low speed, fans must have a minimum airflow of 1,250 CFM and an efficiency of 155 CFM/Watt
3.	At medium speed, fans must have a minimum airflow of 3,000 CFM and an efficiency of 100 CFM/W.
4.	At high speed, fans must have a minimum airflow of 5,000 CFM and an efficiency of 75 CFM/Watt
5.	Qualifying ceiling fan models must come with a minimum 30-year motor warranty; one-year component(s) warranty; and light kit warranty specified in “ENERGY STAR® Program Requirements for Luminaires” document. ²⁵⁹
6.	Integral or attachable lighting, including separately sold ceiling fan light kits, must meet requirements provided in the “ENERGY STAR® Program Requirements for Luminaires” specification. ²⁶⁰
7.	Qualifying products must permit convenient consumer adjustment of fan speed, by means of one or more wall-mounted switch(es), a remote control, or readily accessible pull chains.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Energy savings were calculated using the ENERGY STAR® Ceiling Fan Savings Calculator found on the ENERGY STAR® website.²⁶¹ Default values were taken directly from the ENERGY STAR® Ceiling Fan Savings Calculator, unless otherwise specified.

$$kWh_{savings} = (kWh_{baseline} - kWh_{ES})_{fan} + (kWh_{baseline} - kWh_{ES})_{lgt} \times IEF_E$$

Equation 104

²⁵⁹ ENERGY STAR® Program Requirements for Luminaires.

http://www.energystar.gov/ia/partners/product_specs/program_reqs/Final_Luminaires_V1_2.pdf?6d42-c7e4.

²⁶⁰ Ibid.

²⁶¹ ENERGY STAR® Ceiling Fan Savings Calculator (updated September 2013).

<https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/save-energy/purchase-energy-saving-products>.

$$kWh_{baseline,Fan} = \frac{W_{Fan,baseline} \times AOH_{Fan}}{1,000}$$

Equation 105

$$kWh_{ES,Fan} = \frac{W_{Fan,ES} \times AOH_{Fan}}{1,000}$$

Equation 106

$$W_{Fan} = (W_{LS} \times OP_{LS}) + (W_{MS} \times OP_{MS}) + (W_{HS} \times OP_{HS})$$

Equation 107

$$kWh_{baseline,Lgt} = \frac{W_{Lgt,baseline} \times AOH_{Lgt}}{1,000}$$

Equation 108

$$kWh_{ES,Lgt} = \frac{W_{Lgt,ES} \times AOH_{Lgt}}{1,000}$$

Equation 109

Where:

$kWh_{baseline}$	=	Non-ENERGY STAR® baseline energy usage
kWh_{ES}	=	ENERGY STAR® average energy usage
IEF_E	=	Energy Interactive Effects Factor (Table 2-349) ²⁶²
$W_{Lgt,baseline}$	=	Conventional lighting total wattage = 115 W (160 W default value from ENERGY STAR® calculator reduced to comply with EISA 2007 baseline wattages) ²⁶³
$W_{Lgt,ES}$	=	Actual wattage of installed ENERGY STAR® lighting; if unknown, assume one high-efficiency 32 W lamp
$W_{Fan,baseline}$	=	Conventional fan motor wattage
$W_{Fan,ES}$	=	ENERGY STAR® fan motor wattage
$W_{LS,MS,HS}$	=	Fan motor wattage at low, medium, and high speed; see Table 2-350
$OP_{LS,MS,HS}$	=	Fan operating percentage at low, medium, and high speed; see Table 2-351

²⁶² The assumed energy interactive effects factors are taken from the residential lighting measure.

²⁶³ EISA 2007 baseline wattages are approximately 72 percent of standard incandescent wattages.

AOH_{Lgt} = Annual lighting operating hours = 803 hours/year (assuming 2.2 hours/day and 365 days/year operation)²⁶⁴

AOH_{Fan} = Annual fan operating hours = 1,095 hours/year (assuming 3.0 hours/day and 365 days/year operation)

1,000 = Constant to convert from W to kW

Table 2-349: ENERGY STAR® Ceiling Fans—Interactive Effects Factor for Cooling Energy Savings and Heating Energy Penalties²⁶⁵

IEF _E					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.06	1.13	1.17	1.15	1.12
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.91	1.00	1.05	1.11	0.97
Electric Resistance Heat with AC	0.65	0.80	0.90	1.00	0.75
Electric Resistance Heat with no AC	0.57	0.69	0.76	0.83	0.65
No heat with AC	1.06	1.13	1.17	1.15	1.12
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ²⁶⁶	0.87	1.03	1.08	1.12	1.01
Upstream Lighting ²⁶⁷	0.89	1.03	1.07	1.10	1.01

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

²⁶⁴ The assumed annual operating hours are taken from the residential lighting measure.

²⁶⁵ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \text{HVAC}_{\text{savings}} / \text{Lighting}_{\text{savings}}$.

²⁶⁶ Calculated using IEFs from Cadmus report and weighted using TMY CDD and HDD for Texas. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

²⁶⁷ Ibid.

Table 2-350: Ceiling Fan Motor Wattages

Fan Type	Fan Speed	Fan Motor Wattage (W)
Conventional	Low	15
	Medium	34
	High	67
ENERGY STAR®	Low	6
	Medium	23
	High	56

Table 2-351: Ceiling Fan Operating Percentages

Fan Speed	Operating Percentage (OP)
Low	40%
Medium	40%
High	20%

Demand Savings Algorithms

Peak demand savings were calculated using separate coincidence factors for the lighting and the fan motor portion of the ceiling fan savings. For lighting the coincidence factor varies based on climate zone. For the fan motor a coincidence factor of 0.446 was applied (derived from the EnergyGauge software ceiling fan profiles).

$$kW_{savings} = kW_{Fan} + kW_{Lgt}$$

Equation 110

$$kW_{Fan} = \frac{W_{Fan,baseline} - W_{Fan,ES}}{1,000} \times CF_{Fan}$$

Equation 111

$$kW_{Lgt} = \frac{W_{Lgt,baseline} - W_{Lgt,ES}}{1,000} \times CF_{Lgt} \times IEF_D$$

Equation 112

Where:

- kW_{Fan} = Fan demand savings
- CF_{Fan} = Fan motor coincidence factor = 0.446
- kW_{Lgt} = Lighting demand savings
- CF_{Lgt} = Lighting coincidence factor (Table 2-352)

$$IEF_D = \text{Demand Interactive Effects Factor (Table 2-353)}^{268}$$

Table 2-352 ENERGY STAR® Ceiling Fans—Lighting Coincidence Factors²⁶⁹

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.060	0.053	0.063	0.059	0.032
Winter	0.277	0.232	0.199	0.267	0.357

Table 2-353: ENERGY STAR® Ceiling Fans—Interactive Effects Factor for Cooling Demand Savings and Heating Demand Penalties²⁷⁰

IEF _{D,summer}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	1.45	1.33	1.68	1.23	1.44
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	1.27	1.28	1.19	1.23	1.37
Electric Resistance Heat with AC	1.07	1.27	1.07	1.23	1.36
Electric Resistance Heat with no AC	1.00	1.00	1.00	1.00	1.00
No heat with AC	1.45	1.33	1.68	1.23	1.44
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ²⁷¹	1.24	1.43	1.46	1.51	1.37
Upstream Lighting ²⁷²	1.20	1.36	1.39	1.43	1.31

²⁶⁸ The assumed demand interactive effects factors are taken from the residential lighting measure.

²⁶⁹ See Volume 1, Appendix B.

²⁷⁰ Extracted from BEopt energy models used to estimate savings for envelope measures. Referencing the EISA baseline table, the typical lumen output was determined by taking the midpoint for the 60 watt equivalent lamp (900 lm), which was assumed to be the most typical installation. The resulting lumens were divided by the default wattage for incandescents (43 W), CFLs (13 W), and LEDs (10 W) resulting in an assumed efficacy for incandescents (21 lm/W), CFLs (70 lm/W), and LEDs (90 lm/W). IEF values were calculated using the following formula: $1 + \frac{HVAC_{savings}}{Lighting_{savings}}$.

²⁷¹ Calculated using IEFs from Cadmus report and weighted using TMY CDD and HDD for Texas. Cadmus report: Cadmus. Entergy Energy-Efficiency Portfolio Evaluation Report 2013 Program Year. Prepared for Entergy Arkansas, Inc. March 14, 2014. Docket No. 07-082-TF.

²⁷² Ibid.

IEF _{D,winter}					
Heating/Cooling Type*	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Gas Heat with AC	0.98	0.98	0.98	0.98	0.98
Gas Heat with no AC	1.00	1.00	1.00	1.00	1.00
Heat Pump	0.71	0.67	0.65	0.74	0.81
Electric Resistance Heat with AC	0.44	0.36	0.38	0.42	0.52
Electric Resistance Heat with no AC	0.44	0.36	0.38	0.42	0.52
No heat with AC	0.98	0.98	0.98	0.98	0.98
Unconditioned Space	1.00	1.00	1.00	1.00	1.00
Heating/Cooling Unknown ²⁷³	0.75	0.80	0.83	0.85	0.81
Upstream Lighting ²⁷⁴	0.78	0.83	0.85	0.86	0.83

* IEF for homes with no AC are most appropriate for customers with evaporative cooling or room air conditioners.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

²⁷³ Ibid.

²⁷⁴ Ibid.

Measure Life and Lifetime Savings

The estimated useful life (EUL) is established at 10 years according to the ENERGY STAR® Ceiling Fan Savings Calculator.

This EUL is consistent with Docket No. 38025 approved in 2010.²⁷⁵

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- The number of installed ENERGY STAR® ceiling fan and light kits.
- Wattage of installed lighting

References and Efficiency Standards

Petitions and Rulings

- Docket No. 38025. Petition of Electric Utility Marketing Managers of Texas to Amend Deemed Savings for ENERGY STAR® Appliance Measures. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

The applicable version of the ENERGY STAR® specifications and requirements for ceiling fans.

²⁷⁵ Docket No. 38025. Petition of Electric Utility Marketing Managers of Texas to Amend Deemed Savings for ENERGY STAR® Appliance Measures. Public Utility Commission of Texas.

Document Revision History

Table 2-354: ENERGY STAR® Ceiling Fan Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Minor edits to language and updates to ENERGY STAR® specification table.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2014	TRM v3.0 update. Explanation of methodology and alignment with ENERGY STAR® calculator. Introduction of interactive effects factors and in-service rates. New peak savings calculated according to revised peak definition.
v3.1	11/05/2015	TRM v3.1 update. Revision of interactive effects factors to reflect indoor-specific values for additional heating and cooling equipment types.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. Updated interactive effect values using building energy simulation.
v5.0	10/2017	TRM v5.0 update. Updated footnote reference to ENERGY STAR® calculator.

2.5.2 ENERGY STAR® Clothes Washers Measure Overview

TRM Measure ID: R-AP-CW

Market Sector: Residential

Measure Category: Appliances

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This document presents the accepted deemed savings awarded for the installation of an ENERGY STAR® clothes washer. Savings are awarded at a flat per unit rate, both for energy and demand savings. This measure will apply to existing homes and new construction.

These deemed savings are calculated using the federal standards effective January 1, 2018.

Eligibility Criteria

This section is not applicable.

Baseline Condition

Effective January 1, 2018, the baseline is the Department of Energy (DOE) minimum efficiency standard²⁷⁶ for top-loading clothes washers. While the DOE provides criteria for both top- and front-loading washers, only the standards for top-loading washers are listed below, as a top-loading unit is assumed to be the baseline equipment. This approach is consistent with the ENERGY STAR® appliance calculator.

²⁷⁶ DOE minimum efficiency standard for residential clothes washers.

https://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/39.

Table 2-355: Federal Standard for Clothes Washers

Product Type	Current Criteria as of January 1, 2018
Top-loading, Standard (1.6 ft ³ or greater capacity)	IMEF ≥ 1.57 IWF ≤ 6.5
Top-loading, Compact (less than 1.6 ft ³ capacity)	IMEF ≥ 1.15 IWF ≤ 12.0

High-Efficiency Condition

The table below displays the ENERGY STAR® Final Version 8.0 requirements for eligible clothes washers effective February 5, 2018, with early certification available starting May 5, 2017.²⁷⁷ These values are subject to updates in ENERGY STAR® specifications; energy efficiency service providers are expected to comply with the latest ENERGY STAR® requirements.

Table 2-356: ENERGY STAR® Specifications for Residential Clothes Washers

Product Type	Current Criteria as of February 5, 2018
ENERGY STAR® Residential Front-loading (> 2.5 ft ³)	IMEF ≥ 2.76 IWF ≤ 3.2
ENERGY STAR® Residential Top-loading (> 2.5 ft ³)	IMEF ≥ 2.06 IWF ≤ 4.3
ENERGY STAR® Residential Small or Compact (< 2.5 ft ³)	IMEF ≥ 2.07 IWF ≤ 4.2

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Energy savings for this measure were derived using the ENERGY STAR® Appliance Savings Calculator found on the ENERGY STAR® website.²⁷⁸ This document will be updated regularly to apply the values provided in the latest available ENERGY STAR® appliance calculator. The most recent TRM version should be referenced to determine the savings for this measure.

²⁷⁷ Available for download at:

<http://www.energystar.gov/sites/default/files/specs//ENERGY%20STAR%20Final%20Version%207.0%20Clothes%20Washer%20Program%20Requirements.pdf>.

²⁷⁸ ENERGY STAR® Appliance Savings Calculator (updated September 2015).

<https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/save-energy/purchase-energy-saving-products>.

$$kWh_{savings} = kWh_{baseline} - kWh_{ES}$$

Equation 113

Baseline Unit

$$kWh_{baseline} = kWh_{conv,machine} + kWh_{conv,WH} + kWh_{conv,dryer} + kWh_{conv,LPM}$$

Equation 114

$$kWh_{conv,machine} = MCF \times RUEC_{conv} \times \frac{LPY}{RLPY}$$

Equation 115

$$kWh_{conv,WH} = WHCF \times RUEC_{conv} \times \frac{LPY}{RLPY}$$

Equation 116

$$kWh_{conv,LPM} = kW_{conv,LPM} \times (8,760 - LPY)$$

Equation 117

$$kWh_{conv,dryer} = \left[\left(\frac{CAP_{conv}}{IMEF_{FS}} \times LPY \right) - \left(RUEC_{conv} \times \frac{LPY}{RLPY} \right) - kWh_{conv,LPM} \right] \times \frac{DU_{DW}}{DUF}$$

Equation 118

Where:

$kWh_{baseline}$ = Federal standard baseline energy usage

$kWh_{conv,machine}$ = Conventional machine energy

$kWh_{conv,WH}$ = Conventional water heater energy

$kWh_{conv,dryer}$ = Conventional dryer energy

$kWh_{conv,LPM}$ = Conventional combined low-power mode energy

$RUEC_{conv}$ = Conventional rated unit electricity consumption = 381 kWh/year (top-loading, standard)²⁷⁹, 163 kWh/year top-loading, compact)

LPY = Loads per year = 295

$RLPY$ = Reference loads per year = 392

$kW_{conv,LPM}$ = Combined low-power mode wattage of conventional unit = 0.00115 kW (top-loading, standard), 0.00144 kW (top-loading, compact)

²⁷⁹ This value is taken from the ENERGY STAR® appliance calculator available September 2015, and corresponds with the federal standard after March 7, 2015.

CAP_{conv}	=	Average machine capacity = 4.5 ft ³ (top-loading, standard), 2.1 ft ³ (top-loading, compact)
$IMEF_{FS}$	=	Federal standard integrated modified energy factor (Table 2-355)
MCF	=	Machine consumption factor = 20%
$WHCF$	=	Water heater consumption factor = 80%
DU_{DW}	=	Dryer usage in households with both a washer and a dryer = 95%
DUF	=	Dryer use factor (percentage of washer loads dried in machine) = 91%

ENERGY STAR® Unit

$$kWh_{ES} = kWh_{ES,machine} + kWh_{ES,WH} + kWh_{ES,dryer} + kWh_{ES,LPM} \quad \text{Equation 119}$$

$$kWh_{ES,machine} = MCF \times RUEC_{ES} \times \frac{LPY}{RLPY} \quad \text{Equation 120}$$

$$kWh_{ES,WH} = WHCF \times RUEC_{ES} \times \frac{LPY}{RLPY} \quad \text{Equation 121}$$

$$kWh_{ES,LPM} = kW_{ES,LPM} \times (8,760 - LPY) \quad \text{Equation 122}$$

$$kWh_{ES,dryer} = \left[\left(\frac{CAP_{ES}}{IMEF_{ES}} \times LPY \right) - \left(RUEC_{ES} \times \frac{LPY}{RLPY} \right) - kWh_{ES,LPM} \right] \times \frac{DU_{DW,ES}}{DUF} \quad \text{Equation 123}$$

Where:

kWh_{ES}	=	ENERGY STAR® average energy usage
$kWh_{ES,machine}$	=	ENERGY STAR® machine energy
$kWh_{ES,WH}$	=	ENERGY STAR® water heater energy
$kWh_{ES,dryer}$	=	ENERGY STAR® dryer energy
$kWh_{ES,LPM}$	=	ENERGY STAR® combined low-power mode energy
$RUEC_{ES}$	=	ENERGY STAR® rated unit electricity consumption (see Table 2-357)

$kW_{ES,LPM}$ = Combined low-power mode wattage of ENERGY STAR® unit (see Table 2-357)

$IMEF_{ES}$ = ENERGY STAR® integrated modified energy factor (Table 2-356)

CAP_{ES} = Average machine capacity (see Table 2-357)

Table 2-357: ENERGY STAR® Clothes Washer Characteristics²⁸⁰

Product Type	ENERGY STAR® Rated Unit Electricity Consumption (kWh)	Average Capacity (ft ³)	Combined Low-Power Mode Wattage (kW)
Residential Front-loading (> 2.5 ft ³)	127	4.0	0.00160
Residential Top-loading (> 2.5 ft ³)	230	4.5	0.00115
Residential Small or Compact (< 2.5 ft ³)	109	2.1	0.00144

Summer Demand Savings Algorithms

$$kW_{savings} = \frac{kWh_{savings}}{AOH} \times CF$$

Equation 124

$$AOH = LPY \times d$$

Equation 125

Where:

AOH = Annual operating hours

CF = Coincidence factor (Table 2-358)

LPY = Loads per year = 295

d = Average wash cycle duration = 1 hour^{281,282}

²⁸⁰ This value is taken from the ENERGY STAR® appliance calculator available September 2015, and corresponds with the ENERGY STAR® specification after March 7, 2015.

²⁸¹ Weighted average of Consumer Reports Cycle Times for Top and Front-Loading Clothes Washers. Top: <http://www.consumerreports.org/cro/appliances/laundry-and-cleaning/washing-machines/top-loading-washing-machine-ratings/ratings-overview.htm>. Front: <http://www.consumerreports.org/cro/appliances/laundry-and-cleaning/washing-machines/front-loading-washing-machine-ratings/ratings-overview.htm>.

²⁸² Consumer Reports. "Top-loading washers remain more popular with Americans". April 13, 2010. Weighted average of 75 percent Top-Loading Clothes Washers and 25 percent Front-Loading Clothes Washers. <http://news.consumerreports.org/home/2010/04/best-front-loaders-top-loaders-which-is-more-popular-mold-vibration-washing-machine-reviews.html>. This publication is available for purchase only.

Table 2-358: ENERGY STAR® Clothes Washer Coincidence Factors²⁸³

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.040	0.040	0.040	0.041	0.041
Winter	0.043	0.043	0.043	0.044	0.039

Deemed Energy Savings Tables

Table 2-359: ENERGY STAR® Clothes Washer Energy Savings (kWh)

ENERGY STAR® Clothes Washer—Annual Energy Savings			
Type	Water Heater Fuel Type	Dryer Fuel Type	kWh Savings
Front-loading > 2.5 ft ³	Electric	Electric	394
		Gas	187
	Gas	Electric	241
		Gas	34
Top-loading > 2.5 ft ³	Electric	Electric	193
		Gas	114
	Gas	Electric	102
		Gas	23
All ≤ 2.5 ft ³	Electric	Electric	222
		Gas	41
	Gas	Electric	189
		Gas	8

²⁸³ See Volume 1, Appendix B.

Deemed Summer Demand Savings Tables

Table 2-360: ENERGY STAR® Clothes Washer Summer Peak Demand Savings (kW)

ENERGY STAR® Clothes Washer—Summer Demand Savings							
Washer Type	Fuel Type		Summer Demand Savings (kW)				
	Water Heater	Dryer	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Front-loading > 2.5 ft ³	Electric	Electric	0.053	0.053	0.053	0.055	0.055
		Gas	0.025	0.025	0.025	0.026	0.026
	Gas	Electric	0.033	0.033	0.033	0.033	0.033
		Gas	0.005	0.005	0.005	0.005	0.005
Top-loading > 2.5 ft ³	Electric	Electric	0.026	0.026	0.026	0.027	0.027
		Gas	0.015	0.015	0.015	0.016	0.016
	Gas	Electric	0.014	0.014	0.014	0.014	0.014
		Gas	0.003	0.003	0.003	0.003	0.003
All ≤ 2.5 ft ³	Electric	Electric	0.030	0.030	0.030	0.031	0.031
		Gas	0.006	0.006	0.006	0.006	0.006
	Gas	Electric	0.026	0.026	0.026	0.026	0.026
		Gas	0.001	0.001	0.001	0.001	0.001

Deemed Winter Demand Savings Tables

Table 2-361: All Climate Zones—ENERGY STAR® Clothes Washer Winter Demand Savings (kW)

ENERGY STAR® Clothes Washer—Winter Demand Savings							
Washer Type	Fuel Type		Winter Demand Savings (kW)				
	Water Heater	Dryer	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Front-loading > 2.5 ft ³	Electric	Electric	0.057	0.057	0.057	0.059	0.052
		Gas	0.027	0.027	0.027	0.028	0.025
	Gas	Electric	0.035	0.035	0.035	0.036	0.032
		Gas	0.005	0.005	0.005	0.005	0.005
Top-loading > 2.5 ft ³	Electric	Electric	0.028	0.028	0.028	0.029	0.026
		Gas	0.017	0.017	0.017	0.017	0.015
	Gas	Electric	0.015	0.015	0.015	0.015	0.014
		Gas	0.003	0.003	0.003	0.003	0.003
All ≤ 2.5 ft ³	Electric	Electric	0.032	0.032	0.032	0.033	0.029
		Gas	0.006	0.006	0.006	0.006	0.005
	Gas	Electric	0.028	0.028	0.028	0.028	0.025
		Gas	0.001	0.001	0.001	0.001	0.001

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) of an ENERGY STAR® clothes washer is established at 11 years based on the Technical Support Document for the current DOE Final Rule standards for residential clothes washers.²⁸⁴

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of units installed
- Type of unit (top-loading, front-loading, or compact)
- Fuel type of water heater (gas or electric)
- Fuel type of dryer (gas or electric)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- The applicable version of the ENERGY STAR® specifications and requirements for clothes washers.

²⁸⁴ The median lifetime was calculated using the survival function outlined in the DOE Technical Support Document. Final Rule: Standards, Federal Register, 77 FR 32308 (May 31, 2012) and associated Technical Support Document. Accessed 10/07/2014.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/39. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2008-BT-STD-0019-0047>.

Document Revision History

Table 2-362: ENERGY STAR® Clothes Washer Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. New ENERGY STAR® standards incorporated.
v3.0	4/10/2015	TRM v3.0 update. Updated EUL to align with median lifetime. New peak savings calculated according to revised peak definition.
v3.1	11/05/2015	TRM v3.1 update. New ENERGY STAR® algorithms and default assumptions incorporated.
v3.1	3/28/2016	TRM v3.1 March revision. Updated winter coincidence factors and winter and summer demand savings tables.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. Updated baseline IMEF to reflect changes in Federal Standard. Updated Front Load Washer IMEF to reflect changes in ENERGY STAR Specification. Added baseline for compact units to reflect Federal Standard for compact washers.

2.5.3 ENERGY STAR® Dishwashers Measure Overview

TRM Measure ID: R-AP-DW

Market Sector: Residential

Measure Category: Appliances

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This document presents the accepted deemed savings awarded for the installation of an ENERGY STAR® dishwasher. Savings are awarded at a flat per unit rate, both for energy and demand savings. This measure will apply to existing homes and new construction.

Eligibility Criteria

This measure applies to both standard and compact dishwasher types.

Baseline Condition

Effective May 30, 2013, the baseline is the Department of Energy (DOE) minimum efficiency standard²⁸⁵ for dishwashers.

²⁸⁵ DOE minimum efficiency standard for residential dishwashers.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/67.

Table 2-363 Federal Standard for Dishwashers

Product Type	Estimated Annual Energy Use (kWh/year)	Water Consumption (gallons/cycle)
Standard (≥ 8 place settings)	≤ 307	≤ 5.0
Compact (< 8 place settings)	≤ 222	≤ 3.5

High-Efficiency Condition

The following table displays the ENERGY STAR® Final Version 6.0 requirements for eligible dishwashers effective January 29, 2016.²⁸⁶ These values are subject to updates in ENERGY STAR® specifications; energy efficiency service providers are expected to comply with the latest ENERGY STAR® requirements.

Table 2-364 ENERGY STAR® Specifications for Dishwashers

Product Type	Estimated Annual Energy Use (kWh/year)	Water Consumption (gallons/cycle)
Standard (≥ 8 place settings + 6 serving pieces)	≤ 270	≤ 3.5
Compact (< 8 place settings + 6 serving pieces)	≤ 203	≤ 3.1

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Energy savings for this measure were derived using the ENERGY STAR® Appliance Savings Calculator found on the ENERGY STAR® website and the revised ENERGY STAR® specification in Table 2-364.²⁸⁷ Default values were taken directly from the ENERGY STAR® calculator. This document will be updated regularly to apply the values provided in the latest available ENERGY STAR® specification and appliance calculator. The most recent TRM version should be referenced to determine measure savings for this measure.

²⁸⁶ Available for download at:

http://www.energystar.gov/sites/default/files/ENERGY%20STAR%20Residential%20Dishwasher%20Version%206.0%20Final%20Program%20Requirements_0.pdf.

²⁸⁷ ENERGY STAR® Appliance Savings Calculator (updated September 2015).

<https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/save-energy/purchase-energy-saving-products>.

$$kWh_{savings} = kWh_{baseline} - kWh_{ES}$$

Equation 126

$$kWh_{baseline} = kWh_{conv,machine} + kWh_{conv,WH}$$

Equation 127

$$kWh_{conv,machine} = RUEC_{conv} \times MCF$$

Equation 128

$$kWh_{conv,WH} = RUEC_{conv} \times WHCF$$

Equation 129

$$kWh_{ES} = kWh_{ES,machine} + kWh_{ES,WH}$$

Equation 130

$$kWh_{ES,machine} = RUEC_{ES} \times MCF$$

Equation 131

$$kWh_{ES,WH} = RUEC_{ES} \times WHCF$$

Equation 132

Where:

$kWh_{baseline}$ = Federal standard baseline energy usage

kWh_{ES} = ENERGY STAR® average energy usage

$kWh_{conv,machine}$ = Conventional machine energy

$kWh_{conv,WH}$ = Conventional water heater energy

$kWh_{ES,machine}$ = ENERGY STAR® machine energy

$kWh_{ES,WH}$ = ENERGY STAR® water heater energy

$RUEC_{conv}$ = Conventional rated use electricity consumption = 307 kWh/year for standard and 222 kWh/year for compact (Table 2-363)

$RUEC_{ES}$ = ENERGY STAR® rated use electricity consumption = 270 kWh/year for standard and 203 kWh/year for compact (Table 2-364)

MCF = Machine consumption factor = 44%

$WHCF$ = Water heater consumption factor = 56%

Demand Savings Algorithms

$$kW_{savings} = \frac{kWh_{savings}}{AOH} \times CF$$

Equation 133

$$AOH = CPY \times d$$

Equation 134

Where:

AOH = Annual operating hours

CF = Coincidence factor = (Table 2-365)

CPY = Cycles per year = 215

d = Average wash cycle duration = 2.1 hours²⁸⁸

Table 2-365: ENERGY STAR® Dishwasher Coincidence Factors²⁸⁹

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	0.042	0.041	0.042	0.041	0.042
Winter	0.106	0.104	0.090	0.112	0.129

Deemed Energy Savings Tables

Table 2-366: ENERGY STAR® Dishwasher Energy Savings

ENERGY STAR® Dishwasher—Energy Savings (kWh)		
Product Type	Electric Water Heating	Gas Water Heating
Standard	37	16
Compact	19	8

²⁸⁸ Average of Consumer Reports Cycle Times for Dishwashers.

<http://www.consumerreports.org/cro/appliances/kitchen-appliances/dishwashers/dishwasher-ratings/ratings-overview.htm>.

²⁸⁹ See Volume 1, Appendix B.

Deemed Summer Demand Savings Table

Table 2-367: ENERGY STAR® Dishwasher Summer Peak Demand Savings (kW)

ENERGY STAR® Dishwasher—Summer Demand Savings (kW)						
Dishwasher Type	Water Heating Fuel	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Standard	Electric	0.003	0.003	0.003	0.003	0.003
	Gas	0.002	0.001	0.002	0.001	0.002
Compact	Electric	0.002	0.002	0.002	0.002	0.002
	Gas	0.001	0.001	0.001	0.001	0.001

Deemed Winter Demand Savings Tables

Table 2-368: ENERGY STAR® Dishwasher Winter Peak Demand Savings (kW)

ENERGY STAR® Dishwasher—Winter Demand Savings (kW)						
Dishwasher Type	Water Heating Fuel	Climate Zone 1	Climate Zone 2	Climate Zone 3	Climate Zone 4	Climate Zone 5
Standard	Electric	0.009	0.009	0.007	0.009	0.011
	Gas	0.004	0.004	0.003	0.004	0.005
Compact	Electric	0.004	0.004	0.004	0.005	0.005
	Gas	0.002	0.002	0.002	0.002	0.002

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) is established at 15 years based on the Technical Support Document for the current DOE Final Rule standards for residential dishwashers.²⁹⁰

²⁹⁰ The median lifetime was calculated using the survival function outlined in the DOE Technical Support Document. Final Rule: Standards, Federal Register, 77 FR 31918 (May 30, 2012) and associated Technical Support Document. Accessed 10/07/2014.
http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/67. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2011-BT-STD-0060-0007>.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of units installed
- Type of dishwasher (standard or compact)
- Fuel type of water heater (gas or electric)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- The applicable version of the ENERGY STAR® specifications and requirements for dishwashers.

Document Revision History

Table 2-369: ENERGY STAR® Dishwasher Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin.
v2.0	4/18/2014	TRM v2.0 update. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. No revision.
v3.0	4/10/2015	TRM v3.0 update. New ENERGY STAR® specifications incorporated into measure. New peak savings calculated according to revised peak definition.
v3.1	11/05/2015	TRM v3.1 update. Final ENERGY STAR® specification incorporated into measure. Consolidated table formats.
v3.1	3/28/2016	TRM 3.1 March revision. Updated summer and winter coincidence factors and demand savings tables.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. Updated footnote reference to ENERGY STAR® calculator.

2.5.4 ENERGY STAR® Refrigerators Measure Overview

TRM Measure ID: R-AP-RF

Market Sector: Residential

Measure Category: Appliances

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction, Early Retirement

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure applies to all ENERGY STAR® refrigerators that meet the criteria for the ENERGY STAR® label specified below.

Eligibility Criteria

Utilities should refer to the January 2015 memo, “Considerations for early replacement of residential equipment,”²⁹¹ when designing programs that permit savings to be claimed for early retirement. To qualify for early retirement, the ENERGY STAR® unit must replace an existing, full-size unit with a maximum age of 20 years. To determine the remaining useful life of an existing unit, see Table 2-373. All retired refrigerators must be dismantled in an environmentally safe manner in accordance with applicable federal, state, and local regulations. The installer will provide documentation of proper disposal of refrigerators. In order to receive early retirement savings, the unit to be replaced must be functioning at the time of removal.

Newly-installed refrigerators must meet current ENERGY STAR® efficiency levels.

²⁹¹ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. “Considerations for early replacement of residential equipment.” Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to all Texas investor-owned utilities through the EM&V team’s SharePoint.

Baseline Condition

For new construction or replace-on-burnout, the baseline is the Department of Energy (DOE) minimum efficiency standard²⁹² for refrigerators, effective September 15, 2014.

For early retirement, the baseline for refrigerators is assumed to be the annual unit energy consumption of the refrigerator being replaced, as reported by the Association of Home Appliance Manufacturers (AHAM) refrigerator database²⁹³ and adjusted for age according to the formula in the Energy and Demand Savings Methodology section of this measure. AHAM energy use data includes the average manufacturer reported annual kWh usage by year of production dating back to the 1970s.

Alternatively, the baseline annual energy usage of the refrigerator being replaced may be estimated by metering for a period of at least two hours using the measurement protocol specified in the DOE report, "Incorporating Refrigerator Replacement into the Weatherization Assistance Program".²⁹⁴

To determine annual kWh of the refrigerator being replaced, use the following formula:

$$\text{Annual kWh Usage} = \frac{WH \times 8,760}{h \times 1,000}$$

Equation 135

Where:

WH = Watt-hours metered during a time period

h = Measurement time period (hours)

8,760 = Hours in a year

1,000 Watt-hours = 1 kWh

High-Efficiency Condition

Table 2-370 displays the ENERGY STAR® requirements for eligible refrigerators, which went into effect September 15, 2014. These values are subject to updates in ENERGY STAR® specifications; energy efficiency service providers are expected to comply with the latest ENERGY STAR® requirements.

²⁹² DOE minimum efficiency standard for residential refrigerators and freezers.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/43.

²⁹³ AHAM Refrigerator Database. <http://rfdirectory.aham.org/AdvancedSearch.aspx>.

²⁹⁴ Alex Moore, DandR International, Ltd. "Incorporating Refrigerator Replacement into the Weatherization Assistance Program" Information Tool Kit." Department of Energy. November 19, 2001. http://www.waptac.org/data/files/Website_Docs/technical_tools/toolkit07.pdf.

Table 2-370: ENERGY STAR® Specifications for Refrigerators

ENERGY STAR® Refrigerator		
Product Type	Volume	Criteria as of September 15, 2014
Full-Size Refrigerators and Refrigerator-Freezers	7.75 cubic feet or greater	Approximately 10 percent more energy efficient than the minimum federal standard (see Table 2-371)

Configuration Codes (for Table 2-371):

BF: Bottom Freezer

SD: Refrigerator Only—Single Door

SR: Refrigerator/Freezer—Single Door

SS: Side-by-Side

TF: Top Freezer

TTD: Through the Door (Ice Maker)

A: Automatic Defrost

M: Manual Defrost

P: Partial Automatic Defrost

AV = Adjusted Volume = Fresh Volume + 1.63 x Freezer Volume (ft³)

Table 2-371: Formulas to Calculate the ENERGY STAR® Criteria for each Refrigerator Product Category by Adjusted Volume²⁹⁵

Product Number	Product Class	Baseline Energy Usage Federal Standard as of Sept 15, 2014 (kWh/year) ²⁹⁶	Average ENERGY STAR® Energy Usage (kWh/year) ²⁹⁷	Configuration(s)	Ice (Y/N)	Defrost
1, 2	Refrigerator-freezers—manual or partial automatic defrost	$7.99 \times AV + 225.0$	$7.19 \times AV + 202.5$	SS, TF, BF, SR	Y, N	M, P
1A	Refrigerator-only—manual defrost	$6.79 \times AV + 193.6$	$6.11 \times AV + 174.2$	SD	Y, N	M
3	Refrigerator freezers—automatic defrost with top-mounted freezer without an automatic icemaker	$8.07 \times AV + 233.7$	$7.26 \times AV + 210.3$	TF	N	A
3-BI	Built-in refrigerator-freezers—automatic defrost with top-mounted freezer without an automatic icemaker	$9.15 \times AV + 264.9$	$8.24 \times AV + 238.4$	TF	N	A
3I	Refrigerator-freezers—automatic defrost with top-mounted freezer with an automatic ice maker without TTD ice service	$8.07 \times AV + 317.7$	$7.26 \times AV + 294.3$	TF	N	A
3I-BI	Built-in refrigerator-freezers—automatic defrost with top-mounted freezer without an automatic ice maker with TTD ice service	$9.15 \times AV + 348.9$	$8.24 \times AV + 322.4$	TF	N	A
3A	Refrigerator-only—automatic defrost	$7.07 \times AV + 201.6$	$6.36 \times AV + 181.4$	SD	Y, N	A

²⁹⁵ Available for download at <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>. Select product classes excluded.

²⁹⁶ <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>.

²⁹⁷ Approximately 10 percent more efficient than baseline, as specified in the ENERGY STAR® Appliance Savings Calculator (updated September 2015). http://www.energystar.gov/sites/default/files/asset/document/appliance_calculator.xlsx.

Product Number	Product Class	Baseline Energy Usage Federal Standard as of Sept 15, 2014 (kWh/year) ²⁹⁸	Average ENERGY STAR® Energy Usage (kWh/year) ²⁹⁹	Configuration(s)	Ice (Y/N)	Defrost
3A-BI	Built-in refrigerator-only—automatic defrost	$8.02 \times AV + 228.5$	$7.22 \times AV + 205.7$	SD	Y, N	A
4	Refrigerator-freezers—automatic defrost with side-mounted freezer without an automatic icemaker	$8.51 \times AV + 297.8$	$7.66 \times AV + 268.0$	SS	N	A
4-BI	Built-in refrigerator-freezers—automatic defrost with side-mounted freezer without an automatic icemaker	$10.22 \times AV + 357.4$	$9.20 \times AV + 321.7$	SS	N	A
4I	Refrigerator-freezers—automatic defrost with side-mounted freezer with an automatic icemaker without TTD ice service	$8.51 \times AV + 381.8$	$7.66 \times AV + 352.0$	SS	N	A
4I-BI	Built-in refrigerator-freezers—automatic defrost with side-mounted freezer with an automatic icemaker without TTD ice service	$10.22 \times AV + 441.4$	$9.20 \times AV + 405.7$	SS	N	A
5	Refrigerator-freezers—automatic defrost with bottom-mounted freezer without an automatic icemaker	$8.85 \times AV + 317.0$	$7.97 \times AV + 285.3$	BF	N	A
5-BI	Built-in refrigerator-freezers—automatic defrost with bottom-mounted freezer without an automatic icemaker	$9.40 \times AV + 336.9$	$8.46 \times AV + 303.2$	BF	N	A
5I	Refrigerator-freezers—automatic defrost with bottom-mounted freezer with an automatic icemaker without TTD ice service	$8.85 \times AV + 401.0$	$7.97 \times AV + 369.3$	BF	N	A

²⁹⁸ <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>.

²⁹⁹ Approximately 10 percent more efficient than baseline, as specified in the ENERGY STAR® Appliance Savings Calculator (updated September 2015). http://www.energystar.gov/sites/default/files/asset/document/appliance_calculator.xlsx.

Product Number	Product Class	Baseline Energy Usage Federal Standard as of Sept 15, 2014 (kWh/year) ³⁰⁰	Average ENERGY STAR® Energy Usage (kWh/year) ³⁰¹	Configuration(s)	Ice (Y/N)	Defrost
5I-BI	Built-in refrigerator-freezers—automatic defrost with bottom-mounted freezer with an automatic icemaker without TTD ice service	$9.40 \times AV + 420.9$	$8.46 \times AV + 387.2$	BF	N	A
5A	Refrigerator-freezers—automatic defrost with bottom-mounted freezer with an automatic icemaker with TTD ice service	$9.25 \times AV + 475.4$	$8.33 \times AV + 436.3$	BF	Y	A
5A-BI	Built-in refrigerator-freezers—automatic defrost with bottom-mounted freezer with an automatic icemaker with TTD ice service	$9.83 \times AV + 499.9$	$8.85 \times AV + 458.3$	BF	Y	A
6	Refrigerator-freezers—automatic defrost with top-mounted freezer with TTD ice service	$8.40 \times AV + 385.4$	$7.56 \times AV + 355.3$	TF	Y	A
7	Refrigerator-freezers—automatic defrost with side-mounted freezer with an automatic icemaker with TTD ice service	$8.54 \times AV + 432.8$	$7.69 \times AV + 397.9$	SS	Y	A
7-BI	Built-in refrigerator-freezers—automatic defrost with side-mounted freezer with an automatic icemaker with TTD ice service	$10.25 \times AV + 502.6$	$9.23 \times AV + 460.7$	SS	Y	A

³⁰⁰ <http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>.

³⁰¹ Approximately 10 percent more efficient than baseline, as specified in the ENERGY STAR® Appliance Savings Calculator (updated September 2015). http://www.energystar.gov/sites/default/files/asset/document/appliance_calculator.xlsx.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

New Construction or Replace-on-Burnout

Energy Savings Algorithms

$$kWh_{savings} = kWh_{baseline} - kWh_{ES}$$

Equation 136

Where:

$kWh_{baseline}$ = Federal standard baseline energy usage (see Table 2-371)

kWh_{ES} = ENERGY STAR average energy usage (see (see Table 2-371))

Demand Savings Algorithms

$$kW_{savings} = \frac{kWh_{savings}}{8,760 \text{ hrs}} \times LSAF$$

Equation 137

Where:

$LSAF$ = Load Shape Adjustment Factor (see Table 2-372)

Table 2-372: ENERGY STAR® Refrigerator Load Shape Adjustment Factors³⁰²

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	1.112	1.099	1.108	1.100	1.081
Winter	0.929	0.966	0.924	0.941	0.966

Early Retirement

Annual energy (kWh) and peak demand (kW) savings must be calculated separately for two time periods:

1. The estimated remaining life of the equipment that is being removed, designated the remaining useful life (RUL), and
2. The remaining time in the EUL period (16—RUL)

³⁰² See Volume 1, Appendix B.

Annual energy and peak demand savings are calculated by weighting the early retirement and replace-on-burnout savings by the RUL of the unit and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.

Where:

RUL = Remaining Useful Life (see Table 2-373); if unknown, assume the age of the replaced unit is equal to the EUL resulting in a default RUL of 5.0 years

EUL = Estimated Useful Life = 16 years

Table 2-373: Remaining Useful Life (RUL) of Replaced Refrigerator

Age of Replaced Refrigerator (years)	RUL (years)	Age of Replaced Refrigerator (years)	RUL (years)
1	15.2	12	7.0
2	14.2	13	6.6
3	13.2	14	6.3
4	12.2	15	6.0
5	11.2	16	5.0
6	10.3	17	4.0
7	9.6	18	3.0
8	8.9	19	2.0
9	8.3	20	1.0
10	7.8	21 ^{303,304}	0.0
11	7.4		

Derivation of RULs

ENERGY STAR® refrigerators have an estimated useful life of 16 years. This estimate is consistent with the age at which approximately 50 percent of the refrigerators installed in a given year will no longer be in service, as described by the survival function in Figure 2-10.

³⁰³ RULs are capped at the 75th percentile of equipment age, 21 years, as determined based on DOE survival curves (see Figure 2-10). Systems older than 21 years should use the ROB baseline. See the January 2015 memo, “Considerations for early replacement of residential equipment,” for further detail.

³⁰⁴ Ward, B., Bodington, N., Farah, H., Reeves, S., and Lee, L. “Considerations for early replacement of residential equipment.” Prepared by the Evaluation, Measurement, and Verification (EM&V) team for the Electric Utility Marketing Managers of Texas (EUMMOT). January 2015. This document has been made available to all Texas investor-owned utilities through the EM&V team’s SharePoint.

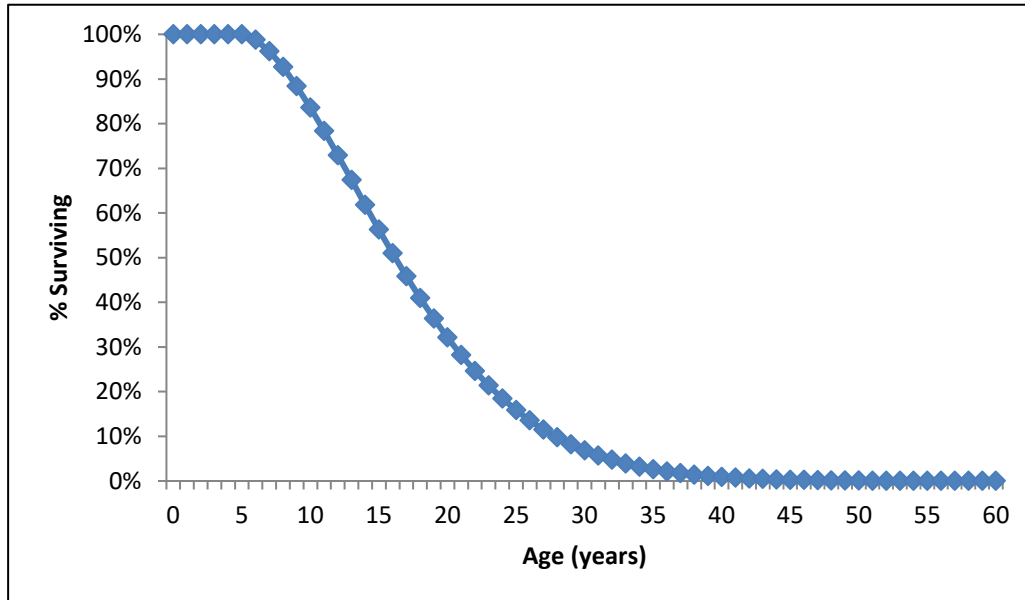


Figure 2-10: Survival Function for ENERGY STAR® Refrigerators³⁰⁵

The method for estimating the remaining useful life (RUL) of a replaced system uses the age of the existing system to re-estimate the projected unit lifetime based on the survival function shown in Figure 2-10. The age of the refrigerator being replaced is found on the horizontal axis, and the corresponding percentage of surviving refrigerators is determined from the chart. The surviving percentage value is then divided in half, creating a new estimated useful lifetime applicable to the current unit age. Then, the age (year) that corresponds to this new percentage is read from the chart. RUL is estimated as the difference between that age and the current age of the system being replaced.

For example, assume a refrigerator being replaced is 15 years old. The corresponding percent surviving value is 56 percent. Half of 56 percent is 28 percent. The age corresponding to 28 percent on the chart is 21 years. Therefore, the RUL of the refrigerator being replaced is (21—15) = 6 years.

Energy Savings Algorithms

For the RUL time period:

$$kWh_{savings,ER} = kWh_{manf} - kWh_{ES}$$

Equation 138

For the remaining time in the EUL period, calculate annual savings as you would for a replace-on-burnout project:

³⁰⁵ Department of Energy, Federal Register, 76 Final Rule 57516, Technical Support Document: 8.2.3.1 Estimated Survival Function. September 15, 2011.

http://www1.eere.energy.gov/buildings/appliance_standards/pdfs/refrig_finalrule_tsd.pdf.

$$kWh_{savings,ROB} = kWh_{baseline} - kWh_{ES}$$

Equation 139

Where:

kWh_{manf} = Annual unit energy consumption from the Association of Home Appliance Manufacturers (AHAM) refrigerator database³⁰⁶ (or from metering)

$kWh_{baseline}$ = Federal standard baseline energy usage (see Table 2-371)

kWh_{ES} = ENERGY STAR[®] average energy usage (see Table 2-371)

Demand Savings Algorithms

To calculate demand savings for the early retirement of a refrigerator, a similar methodology is used as for replace-on-burnout installations, with separate savings calculated for the remaining useful life of the unit, and the remainder of the EUL as outlined in the section above.

For the RUL time period:

$$kW_{savings,ER} = \frac{kWh_{savings,ER}}{8,760 \text{ hrs}} \times LSAF$$

Equation 140

For the remaining time in the EUL period, calculate annual savings as you would for a replace-on-burnout project:

$$kW_{savings,ROB} = \frac{kWh_{savings,ROB}}{8,760 \text{ hrs}} \times LSAF$$

Equation 141

Where:

$LSAF$ = Load Shape Adjustment Factor (Table 2-372)

Annual deemed summer peak demand savings are calculated by weighting the early retirement and replace-on-burnout savings by the RUL of the unit and the remainder of the EUL period, as outlined in Volume 3, Appendix D of this document.

Where:

RUL = Remaining Useful Life (see Table 2-373)

EUL = Estimated Useful Life = 16 years³⁰⁷

³⁰⁶ AHAM Refrigerator Database. <http://rfdirectory.aham.org/AdvancedSearch.aspx>.

³⁰⁷ Department of Energy, Federal Register, 76 Final Rule 57516, Technical Support Document: 8.2.3.1 Estimated Survival Function. September 15, 2011.

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on winter peak demand savings and methodology.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

The estimated useful life (EUL) is established at 16 years based on the current DOE Final Rule standards for residential refrigerators.³⁰⁸

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of units installed
- The project type of the installation (New Construction, Replace-on-Burnout, or Early Retirement)
- Installed refrigerator model number
- Product class (see Table 2-371)

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/43. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2008-BT-STD-0012-0128>.

³⁰⁸ Final Rule: Standards, Federal Register, 76 FR 57516 (Sept. 15, 2011) and associated Technical Support Document. Accessed 10/10/2014.

http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/43. Download TSD at: <http://www.regulations.gov/#!documentDetail;D=EERE-2008-BT-STD-0012-0128>.

- Refrigerator volume
- Freezer volume
- Retired refrigerator model number (Early Retirement only)
- Retired refrigerator annual energy usage (Early Retirement only)
- Age of retired refrigerator (Early Retirement only)
- Recommended: internal temperature(s) in retired refrigerator and, if present, freezer (Early Retirement only)
- Recommended: customer responses to survey questionnaire for early retirement eligibility determination (Early Retirement only)

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- The applicable version of the ENERGY STAR[®] specifications and requirements for refrigerators.

Document Revision History

Table 2-374: ENERGY STAR® Refrigerator Revision History

TRM Version	Date	Description of Change
v1.0	11/25/2013	TRM v1.0 origin
v2.0	4/18/2014	TRM v2.0 update. Low-income and Hard-to-Reach Market Transformation section merged with main measure as “Early Retirement” option. Updated by Frontier Associates, March 2014, based on new federal standards.
v2.1	1/30/2015	TRM v2.1 update. New ENERGY STAR® standards incorporated.
v3.0	4/10/2015	TRM v3.0 update. Early retirement savings may be claimed through any appropriately designed program in accordance with EM&V team’s memo, “Considerations for early replacement of residential equipment.” Remaining useful lifetimes updated. LSAF updated to align with new peak demand methodology.
v3.1	11/05/2015	TRM v3.1 update. Correction to legacy LSAF. Revision to align with ENERGY STAR® calculator and specification.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. Updated RUL value for units with the age of seven years and added RUL values for units with an age of one to five years. Added a default RUL value for when the age of the unit is unknown. Eliminated the eligibility requirement of the existing unit to have an age of minimum five years.
v5.0	10/2017	TRM v5.0 update. No revision.

2.5.5 ENERGY STAR® Pool Pumps Measure Overview

TRM Measure ID: R-AP-PP

Market Sector: Residential

Measure Category: Appliances

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Replace-on-Burnout, New Construction, Early Retirement

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Calculations

Savings Methodology: Engineering Algorithms and Estimates.

Measure Description

This measure involves the replacement of a single-speed pool pump with an ENERGY STAR® certified variable speed or multi-speed pool pump.

Eligibility Criteria

This measure applies to all residential applications of in-ground pools. Above ground pools and pools that serve multiple tenants in a common area are not eligible for this measure.

Multi-speed pool pumps are an alternative to variable speed pumps. The multi-speed pump uses an induction motor that functions as two motors in one, with full-speed and half-speed options. Multi-speed pumps may enable significant energy savings. However, if the half-speed motor is unable to complete the required water circulation task, the larger motor will operate exclusively. Having only two speed-choices limits the ability of the pump motor to fine-tune the flow rates required for maximum energy savings.³⁰⁹ Therefore, multi-speed pumps must have a high-speed override capability to revert back to low speed after a period not to exceed 24 hours.

Baseline Condition

The baseline condition is a 1-3 horsepower (HP) standard efficiency single-speed pool pump.

³⁰⁹ Hunt, A. and Easley, S., 2012, "Measure Guideline: Replacing Single-Speed Pool Pumps with Variable Speed Pumps for Energy Savings." Building America Retrofit Alliance (BARA), U.S. U.S. DOE. May/. <http://www.nrel.gov/docs/fy12osti/54242.pdf>.

High-Efficiency Condition

The high efficiency condition is a 1-3 HP ENERGY STAR® certified variable speed pump (VSP) or ENERGY STAR® certified multi speed pool pump.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings Algorithms

Energy savings for this measure were derived using the ENERGY STAR® Pool Pump Savings Calculator with Texas selected as the applicable location so Texas-specific assumptions were used.³¹⁰

$$kWh_{Savings} = kWh_{conv} - kWh_{ES}$$

Equation 142

Where:

kWh_{conv} = Conventional single-speed pool pump energy (kWh)

kWh_{ES} = ENERGY STAR® variable speed pool pump energy (kWh)

Algorithms to calculate the above parameters are defined as:

$$kWh_{conv} = \frac{PFR_{conv} \times 60 \times hours_{conv} \times days}{EF_{conv} \times 1000}$$

Equation 143

$$kWh_{ES} = kWh_{HS} + kWh_{LS}$$

Equation 144

$$kWh_{HS} = \frac{PFR_{HS} \times 60 \times hours_{HS} \times days}{EF_{HS} \times 1000}$$

Equation 145

$$kWh_{LS} = \frac{PFR_{LS} \times 60 \times hours_{LS} \times days}{EF_{LS} \times 1000}$$

Equation 146

³¹⁰ The ENERGY STAR® Pool Pump Savings Calculator, updated February 2013, can be found on the ENERGY STAR® website at: <https://www.energystar.gov/products/certified-products/detail/pool-pumps>.

Where:

- kWh_{HS} = ENERGY STAR® variable speed pool pump energy at high speed [kWh]
- kWh_{LS} = ENERGY STAR® variable speed pool pump energy at low speed [kWh]
- $hours_{conv}$ = Conventional single-speed pump daily operating hours (Table 2-376)
- $hours_{HS}$ = ENERGY STAR® variable speed pump high speed daily operating hours (Table 2-376)
- $hours_{LS}$ = ENERGY STAR® variable speed pump low speed daily operating hours (Table 2-376)
- days = Operating days per year = 365 days (default)
- PFR_{conv} = Conventional single-speed pump flow rate [gal/min] (Table 2-375)
- PFR_{HS} = ENERGY STAR® variable speed pump high speed flow rate [gal/min] (Table 2-376)
- PFR_{LS} = ENERGY STAR® variable speed pump low speed flow rate [gal/min] (Table 2-376)
- EF_{conv} = Conventional single-speed pump energy factor [gal/W·hr] (Table 2-375)
- EF_{HS} = ENERGY STAR® variable speed pump high speed energy factor [gal/W·hr] (Table 2-376)
- EF_{LS} = ENERGY STAR® variable speed pump low speed energy factor [gal/W·hr] (Table 2-376)
- 60 = Constant to convert between minutes and hours
- 1,000 = Constant to convert from kilowatts to watts

Table 2-375: Conventional Pool Pumps Assumptions³¹¹

Rated Pump HP (New)	Hours ³¹² _{conv}	PFR _{conv} (gal/min)	EF _{conv} (gal/W·h)
≤ 1.25	9.1062	60.0631	2.3964
1.25 < hp ≤ 1.75		64.3846	2.0885
1.75 < hp ≤ 2.25		65.4375	1.9451
2.25 < hp ≤ 2.75		68.4000	1.8805
2.75 < hp ≤ 3		73.1111	1.6453

³¹¹ Conventional pump PFR and EF values are taken from pump curves found in the ENERGY STAR® Pool Pump Savings Calculator.

³¹² The daily average operating hours for conventional single-speed pumps, based on 2014 residential pool pump program survey results from CenterPoint Energy.

Table 2-376: ENERGY STAR® Pool Pumps Assumptions^{313,314}

Rated Pump HP (New)	Hours _{LS}	Hours _{HS}	PFR _{HS} (gal/min)	EF _{HS} (gal/W·h)	PFR _{LS} (gal/min)	EF _{LS} (gal/W·h)
≤ 1.25	9.7	4.3	56.0	2.398	31.0	5.407
1.25 < hp ≤ 1.75			61.0	2.267	31.9	5.433
1.75 < hp ≤ 2.25			66.4	1.954	33.0	5.221
2.25 < hp ≤ 2.75			66.0	2.024	34.0	4.796
2.75 < hp ≤ 3			74.0	1.617	37.0	4.764

Demand Savings Algorithms

$$kW_{Savings} = \left[\frac{kWh_{conv}}{hours_{conv}} - \left(\frac{kWh_{HS} + kWh_{LS}}{hours_{HS} + hours_{LS}} \right) \right] \times \frac{DF}{days}$$

Equation 147

Where:

- kWh_{conv}* = Conventional single-speed pool pump energy (kWh)
- hours_{conv}* = Conventional single-speed pump daily operating hours (Table 2-376)
- kWh_{HS}* = ENERGY STAR® variable speed pool pump energy at high speed [kWh]
- kWh_{LS}* = ENERGY STAR® variable speed pool pump energy at low speed [kWh]
- hours_{HS}* = ENERGY STAR® variable speed pump high speed daily operating hours (Table 2-376)
- hours_{LS}* = ENERGY STAR® variable speed pump low speed daily operating hours (Table 2-376)
- DF* = Demand Factor (Table 2-377)
- days* = Operating days per year = 365 days (default)

³¹³ ENERGY STAR® PFR and EF values are taken from pump curves found in the ENERGY STAR® Pool Pump Savings Calculator.

³¹⁴ The daily average operating hours for low and high VSP settings, based on 2016 residential pool pump program data from CenterPoint Energy.

Table 2-377: Demand Factors

Climate Zone	Summer DF	Winter DF
1	0.258	-0.002
2	0.329	0.025
3	0.276	0.108
4	0.266	0.036
5	0.497	-0.143

Deemed Energy Savings Tables

Table 2-378: ENERGY STAR® Variable Speed Pool Pump Energy Savings³¹⁵

Rated Pump hp (New)	kWh Savings
≤ 1.25	1,581
1.25 < hp ≤ 1.75	2,367
1.75 < hp ≤ 2.25	2,166
2.25 < hp ≤ 2.75	2,677
2.75 < hp ≤ 3	2,902

Deemed Summer Demand Savings Tables³¹⁶

Table 2-379: ENERGY STAR® Variable Speed Pool Pump Summer Demand Savings

Rated Pump HP (New)	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
≤ 1.25	0.216	0.275	0.231	0.222	0.415
1.25 < hp ≤ 1.75	0.287	0.365	0.307	0.295	0.552
1.75 < hp ≤ 2.25	0.292	0.371	0.312	0.300	0.562
2.25 < hp ≤ 2.75	0.333	0.423	0.356	0.342	0.640
2.75 < hp ≤ 3	0.388	0.493	0.414	0.399	0.746

³¹⁵ The results in this table may vary slightly from results produced by the ENERGY STAR® calculator because of rounding of default savings coefficients throughout the measure and pool volume.

³¹⁶ Ibid.

Deemed Winter Demand Savings Tables

Table 2-380: ENERGY STAR® Variable Speed Pool Pump Winter Demand Savings

Rated Pump HP (New)	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
≤ 1.25	-0.001	0.021	0.091	0.030	(0.119)
1.25 < hp ≤ 1.75	-0.002	0.028	0.120	0.040	(0.159)
1.75 < hp ≤ 2.25	-0.002	0.028	0.122	0.040	(0.161)
2.25 < hp ≤ 2.75	-0.002	0.032	0.140	0.046	(0.184)
2.75 < hp ≤ 3	-0.002	0.037	0.163	0.054	(0.214)

Claimed Peak Demand Savings

Table 2-381: ENERGY STAR® Variable Speed Pool Pump Claimed Demand Savings

Rated Pump HP (New)	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
≤ 1.25	0.216	0.275	0.231	0.222	0.415
1.25 < hp ≤ 1.75	0.287	0.365	0.307	0.295	0.552
1.75 < hp ≤ 2.25	0.292	0.371	0.312	0.300	0.562
2.25 < hp ≤ 2.75	0.333	0.423	0.356	0.342	0.640
2.75 < hp ≤ 3	0.388	0.493	0.414	0.399	0.746

Additional Calculators and Tools

ENERGY STAR® Pool Pump Savings Calculator, updated February 2013, can be found on the ENERGY STAR® website at: <https://www.energystar.gov/products/certified-products/detail/pool-pumps>.

Measure Life and Lifetime Savings

According to DEER 2014, the estimated useful life for this measure is 10 years.³¹⁷

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- **For All Projects**
 - Rated horsepower of new pool pump
 - Climate zone
 - Proof of purchase including quantity, make and model information

³¹⁷ Database for Energy Efficient Resources (2014). <http://www.deeresources.com/>.

- **For a Significant Sample of Projects where attainable (e.g. those projects that are selected for inspection, not midstream or retail programs)**
 - Items listed for All Projects above
 - Decision/Action Type: Early Retirement, Replace-On-Burnout, or New Construction
 - Rated horsepower of existing pool pump
 - Existing and new pool pump operating hours

References and Efficiency Standards

Petitions and Rulings

This section is not applicable.

Relevant Standards and Reference Sources

- The applicable version of the ENERGY STAR® specifications and requirements for pool pumps.

Document Revision History

Table 2-382: Residential ENERGY STAR® Pool Pumps Revision History

TRM Version	Date	Description of Change
v5.0	10/2017	TRM v5.0 origin.

2.6 RESIDENTIAL: APPLIANCE RECYCLING

2.6.1 Refrigerator/Freezer Recycling Measure Overview

TRM Measure ID: R-AP-RR

Market Sector: Residential

Measure Category: Appliance Recycling

Applicable Building Types: Single-family, duplex and triplex; Multifamily; Manufactured

Fuels Affected: Electricity

Decision/Action Type(s): Early Retirement

Program Delivery Type(s): Prescriptive

Deemed Savings Type: Deemed Savings Values

Savings Methodology: Engineering Algorithms and Estimates

Measure Description

This measure involves early retirement and recycling of an existing, full-size (7.75 ft³ or greater) refrigerator/freezer in a residential application. Savings represent the entire estimated energy consumption of the existing unit and are applicable over the estimated remaining life of the existing unit.

Eligibility Criteria

This measure applies to operable primary and secondary retired refrigerators/freezers. Recycling savings for this measure are limited to the removal of a working refrigerator/freezer from the electrical grid, and differ from the savings specified in the ENERGY STAR[®] Refrigerator replacement measure. The latter, which pertain to the direct replacement of a refrigerator and reflect the difference in energy consumption between new ENERGY STAR[®] qualifying and standard efficiency models, may be claimed for the recycling of primary refrigerators/freezers that have been replaced, provided that savings for that replacement were not already claimed in another energy efficiency program. To qualify, the customer must release the existing unit to the utility or utility representative in order to ensure proper disposal in accordance with applicable federal, state, and local regulations.

Baseline Condition

Without program intervention, the recycled refrigerator or freezer would have remained operable on the electrical grid. As a result, the baseline condition for early retirement programs is the status quo (continued operation) and the basis for estimating energy savings is the annual

energy consumption of the refrigerator or freezer being retired (as specified in the “Energy and Demand Savings Methodology” section).

High-Efficiency Condition

There is no efficiency standard for a recycling measure because the energy efficient action is the removal of an operable appliance, not—as with most demand side management programs—the installation of a higher efficiency model.

Energy and Demand Savings Methodology

Savings Algorithms and Input Variables

Energy Savings

Energy savings are calculated as follows:

$$\begin{aligned} kWh_{savings} &= kWh_{existing} \times ISAF \times PUF \\ &= 1,308 \times 0.942 \times 0.915 \\ &= 1,128 \text{ kWh} \end{aligned}$$

Equation 148

Where:

$$kWh_{existing} = \text{Average annual energy consumption}^{318} = 1,308 \text{ kWh}$$

$$ISAF = \text{In Situ Adjustment Factor}^{319} = 0.942$$

$$PUF = \text{Part Use Factor}^{320} = 0.915$$

Demand Savings

Summer peak demand savings are calculated as follows:

$$kW_{savings} = \frac{kWh_{savings}}{AOH} \times LSAF$$

Equation 149

³¹⁸ The Cadmus Group, Inc. "Residential Retrofit High Impact Measure Evaluation Report". Prepared for California Public Utilities Commission Energy Division. February 8, 2010. Average of DOE-Based Full-Year Unit Energy Consumption (weighted by representative utility survey participation).

³¹⁹ Ibid. Factor to account for variation between site conditions and controlled DOE testing conditions (90 °F test chamber, empty refrigerator and freezer cabinets, and no door openings). Appliances in warmer climate zones use more energy than those in cooler climate zones; utilized SCE data (highest percentage of warm climate projects) to best approximate Texas climate, p. 139-140.

³²⁰ Ibid. Factor to account for the number of refrigerators that were running, running part time, or not running at the time of recycling, p. 142-143 (weighted by representative utility survey participation, p. 117).

Where:

AOH = Annual Operating Hours = 8,760 hours

LSAF = Load Shape Adjustment Factor (Table 2-383)

Table 2-383: Load Shape Adjustment Factors³²¹

Season	Climate Zone 1: Amarillo	Climate Zone 2: Dallas	Climate Zone 3: Houston	Climate Zone 4: Corpus Christi	Climate Zone 5: El Paso
Summer	1.112	1.099	1.108	1.100	1.081
Winter	0.929	0.966	0.924	0.941	0.966

Deemed Energy Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Summer Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Deemed Winter Demand Savings Tables

There are no lookup tables available for this measure. See engineering algorithms in the previous section for calculating energy and demand savings.

Claimed Peak Demand Savings

Refer to Volume 1, Appendix B: Peak Demand Reduction Documentation for further details on peak demand savings and methodology.

Additional Calculators and Tools

This section is not applicable.

Measure Life and Lifetime Savings

Based on the KEMA Residential Refrigerator Recycling Ninth Year Retention Study,³²² the Estimated Useful Life of Refrigerator Recycling is 8 years, representing the assumed remaining useful life of the retired unit.

³²¹ See Volume 1, Appendix B.

³²² KEMA, Inc. "Residential Refrigerator Recycling Ninth Year Retention Study." Prepared for Southern California Edison Company. July 22, 2004.

Program Tracking Data and Evaluation Requirements

Primary inputs and contextual data that should be specified and tracked by the program database to inform the evaluation and apply the savings properly are:

- Climate zone
- Number of refrigerators/freezers replaced
- Age of removed unit
- Size (in cubic feet)
- Configuration (top freezer, bottom freezer, side-by-side, or single-door)

References and Efficiency Standards

Petitions and Rulings

- Docket No. 42212. Petition of El Paso Electric Company to Approve Revisions to the Deemed Savings for the Appliance Recycling Market Transformation program. Public Utility Commission of Texas.

Relevant Standards and Reference Sources

Not applicable.

Document Revision History

Table 2-384: Residential Refrigerator/Freezer Recycling Revision History

TRM Version	Date	Description of Change
v2.1	1/30/2015	TRM v2.1 origin.
v3.0	4/10/2015	TRM v3.0 update. LSAF updated to align with new peak demand methodology.
v3.1	11/05/2015	TRM v3.1 update. No revision.
v3.1	3/28/2016	TRM v3.1 March revision. Updated summer and winter coincidence factors.
v4.0	10/10/2016	TRM v4.0 update. No revision.
v5.0	10/2017	TRM v5.0 update. No revision.